


DC/DC Railway Converter

TEP 200WIRCM Series, 200 Watt

- Chassis mount with screw terminal block
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Very high efficiency up to 91%
- No minimum load
- Soft start
- Under voltage lock-out circuit
- Adjustable output voltage +10 / -20%
- Sense line
- Optional DIN-rail mounting kit
- 3-year product warranty

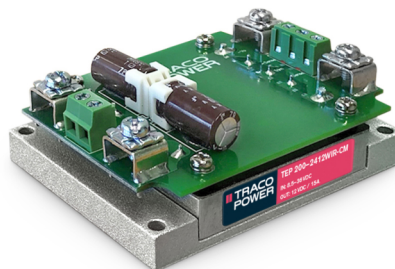

The TEP 200WIRCM Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges. They come in chassis mount version with screw terminal block. A very high efficiency allows full power operation at 25°C with only 100 LFM air flow cooling and operation at 60°C with only 40% power derating. The very wide input voltage range makes these converters interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for onboard power distribution.

Options

TEP-MK1	- Optional DIN-Rail Mounting Kit: www.tracopower.com/overview/tep-mk1
on demand (backorder with MOQ non stocking item)	- Optional model with 3.3 VDC and 50'000 mA Output, and 9 - 36 VDC Input - Optional model with 5 VDC and 36'000 mA Output, and 9 - 36 VDC Input - Optional model with 12 VDC and 15'000 mA Output, and 9 - 36 VDC Input - Optional model with 15 VDC and 12'000 mA Output, and 9 - 36 VDC Input - Optional model with 24 VDC and 7'500 mA Output, and 9 - 36 VDC Input - Optional model with 28 VDC and 6'500 mA Output, and 9 - 36 VDC Input - Optional model with 48 VDC and 3'700 mA Output, and 9 - 36 VDC Input - Optional model with 3.3 VDC and 50'000 mA Output, and 18 - 75 VDC Input - Optional model with 5 VDC and 40'000 mA Output, and 18 - 75 VDC Input - Optional model with 12 VDC and 18'000 mA Output, and 18 - 75 VDC Input - Optional model with 15 VDC and 14'000 mA Output, and 18 - 75 VDC Input - Optional model with 24 VDC and 9'000 mA Output, and 18 - 75 VDC Input - Optional model with 28 VDC and 7'500 mA Output, and 18 - 75 VDC Input - Optional model with 48 VDC and 4'500 mA Output, and 18 - 75 VDC Input - Optional model with 3.3 VDC and 57'000 mA Output, and 43 - 160 VDC Input - Optional model with 5 VDC and 44'000 mA Output, and 43 - 160 VDC Input - Optional model with 12 VDC and 20'000 mA Output, and 43 - 160 VDC Input - Optional model with 15 VDC and 16'000 mA Output, and 43 - 160 VDC Input - Optional model with 24 VDC and 10'000 mA Output, and 43 - 160 VDC Input - Optional model with 28 VDC and 8'500 mA Output, and 43 - 160 VDC Input - Optional model with 48 VDC and 5'000 mA Output, and 43 - 160 VDC Input - Optional models with 2:1 Input - Optional models with inverse Remote On/Off function (passive = off)

Input Specifications

Input Current	- At no load	24 Vin models: 35 mA typ. 48 Vin models: 20 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 185 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.3 VDC min. / 7.7 VDC typ. / 8.1 VDC max. 48 Vin models: 15.5 VDC min. / 16 VDC typ. / 16.3 VDC max. 110 Vin models: 33 VDC min. / 34.5 VDC typ. / 36 VDC max.
Recommended Input Fuse		24 Vin models: 32'000 mA (fast acting) 48 Vin models: 20'000 mA (fast acting) 110 Vin models: 10'000 mA (fast acting) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-20% to +10% (By external trim resistor)	
See application note: www.tracopower.com/overview/tep200wircm			
		Output power must not exceed rated power!	
Voltage Set Accuracy		±1% max.	
Regulation	- Input Variation (Vmin - Vmax)	0.1% max.	
	- Load Variation (0 - 100%)	0.1% max.	
Ripple and Noise (20 MHz Bandwidth)	3.3 Vout models:	75 mVp-p max. (w/ 1 µF X7R 25 µF poscap)	
	5 Vout models:	75 mVp-p max. (w/ 1 µF X7R 25 µF poscap)	
	12 Vout models:	100 mVp-p max. (w/ 1 µF X7R 25 µF poscap)	
	15 Vout models:	100 mVp-p max. (w/ 1 µF X7R 25 µF poscap)	
	24 Vout models:	200 mVp-p max. (w/ 4.7 µF X7R)	
	28 Vout models:	200 mVp-p max. (w/ 4.7 µF X7R)	
	48 Vout models:	300 mVp-p max. (w/ 2.2 µF X7R)	
Capacitive Load	- 24 Vin input	3.3 Vout models:	151'000 µF max.
		5 Vout models:	72'000 µF max.
		12 Vout models:	12'500 µF max.
		15 Vout models:	8'000 µF max.
		24 Vout models:	3'100 µF max.
		28 Vout models:	2'300 µF max.
	- 48 Vin input	48 Vout models:	770 µF max.
		3.3 Vout models:	151'000 µF max.
		5 Vout models:	80'000 µF max.
		12 Vout models:	15'000 µF max.
		15 Vout models:	9'300 µF max.
		24 Vout models:	3'700 µF max.
	- 110 Vin input	28 Vout models:	2'600 µF max.
		48 Vout models:	930 µF max.
		3.3 Vout models:	172'000 µF max.
		5 Vout models:	88'000 µF max.
		12 Vout models:	16'600 µF max.
		15 Vout models:	10'600 µF max.
	24 Vout models:	4'100 µF max.	
	28 Vout models:	3'000 µF max.	
	48 Vout models:	1'000 µF max.	
	Minimum Load	Not required	
Temperature Coefficient		±0.02 %/K max.	

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Hold-up Time	10 ms min. (acc. to EN 50155 Class S2, see application note for ext. capacitor calculation: www.tracopower.com/info/holdup_en50155.pdf)
Start-up Time	75 ms typ.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	120 - 150% of I _{out} max.
Overvoltage Protection	115 - 130% of V _{out} nom.
Transient Response	- Response Time 200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment - Railway Applications - Certification Documents	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1 EN 50155 www.tracopower.com/overview/tep200wircm
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI (Emissions)	- Conducted Emissions - Radiated Emissions	EN 50121-3-2 (EMC for Rolling Stock) EN 55011 class B (with external filter) EN 55032 class B (with external filter) EN 55011 class B (with external filter) EN 55032 class B (with external filter) External filter proposal: www.tracopower.com/overview/tep200wircm
EMS (Immunity)	- Electrostatic Discharge - RF Electromagnetic Field - EFT (Burst) / Surge - Conducted RF Disturbances - PF Magnetic Field	EN 50121-3-2 (EMC for Rolling Stock) Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A Ext. input component: 24 & 48 V _{in} models: 2 x KY 220 µF 110 V _{in} models: 2 x KXJ 150 µF Continuous: EN 61000-4-6, 10 V _{rms} , perf. criteria A EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
EMC / Environmental	- Certification Documents	www.tracopower.com/overview/tep200wircm

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	–40°C to +75°C +115°C max. –40°C to +105°C
Power Derating	- High Temperature	Depending on model
	See application note:	www.tracopower.com/overview/tep200wircm
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	120°C typ. (Automatic recovery at 105°C typ.) Base-Plate
Cooling System		Natural convection (20 LFM)
Sense Function		10% max. of Vout nom. (If sense function is not used, sense pins must be connected to corresponding polarity output pins.)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Remote Control	- Voltage Controlled Remote (passive = on) - Off Idle Input Current - Remote Pin Input Current	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 3 mA typ. -0.5 to 1.0 mA (Optional models with inverse Remote On/Off function (passive = off))
Altitude During Operation		2'000 m max. (for reinforced insulation) 5'000 m max. (for functional insulation)
Regulator Topology		Forward Converter
Switching Frequency		225 - 275 kHz (PWM) 250 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		145 VAC (3.3 and 5 Vout models) 185 VAC (48 Vout models) 172 VAC (other output models)
Isolation Test Voltage	- Input to Output, 60 s - Input to Case, 60 s - Output to Case, 60 s	3'000 VAC 1'500 VAC 1'500 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	300'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration - Mechanical Shock - Thermal Shock - Flammability	MIL-STD-810F EN 61373 MIL-STD-810F EN 61373 MIL-STD-810F EN 45545-2 www.tracopower.com/info/en45545-declaration.pdf
Housing Material		Alu base-plate w. metal case (24 and 48 Vin models) Alu base-plate w. plastic case (110 Vin models)
Base Material		Non-conductive FR4 (UL 94 V-0 rated) (24 and 48 Vin models only)
Potting Material		Silicone (UL 94 V-0 rated)
Housing Type		Metal Case (24 and 48 Vin models) Plastic Case (110 Vin models)
Mounting Type		Chassis Mount
Connection Type		Screw Terminal
Weight		235 g
Thermal Impedance	- Case to Ambient	6.1 K/W typ.
Environmental Compliance	- REACH Declaration - RoHS Declaration - SCIP Reference Number	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) 30fb4cdc-3429-4c17-8e8b-1ebbb46980b9


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep200wircm

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

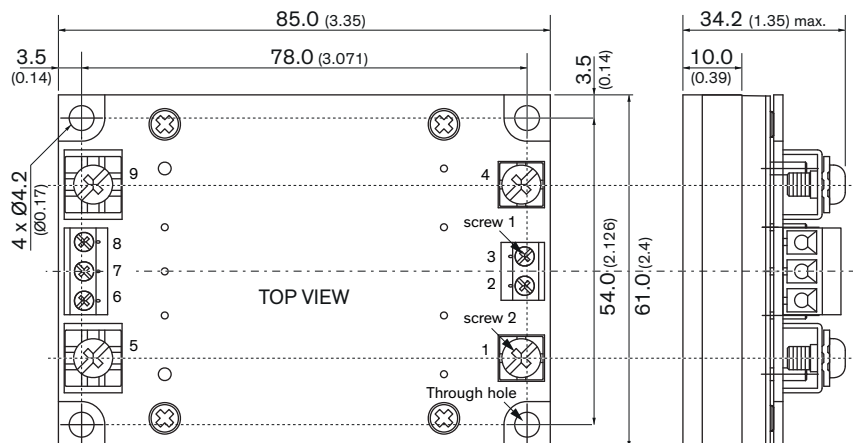

Dimensions in mm (inch)

Tolerances x.x ±0.5 (x.xx ±0.02)

x.xx ±0.25 (x.xxx ±0.01)

Mounting hole pitch tolerances ±0.25 (±0.01)

Screw 2:

Type M5

Head diameter 8.9 (0.350)

Rated current: 65 A

The screw 1 locked torque: max. 5.2 kgfcm / 0.51 Nm

The screw 2 locked torque: max. 16.8 kgfcm / 1.65 Nm

Mounting screw locked torque: max. 11.2 kgfcm / 1.10 Nm

Pinout

Pin	Single
1	–Vin (GND)
2	NC
3	Remote On/Off
4	+Vin (Vcc)
5	–Vout
6	–Sense
7	Trim
8	+Sense
9	+Vout

NC: Not connected

Wire gauge range:

AWG 14 - 26

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TRACO Power:](#)

<u>TEP 200-4811WIRCM</u>	<u>TEP 200-7210WIRCM</u>	<u>TEP 200-7211WIRCM</u>	<u>TEP 200-2410WIRCM</u>	<u>TEP 200-4810WIRCM</u>
<u>TEP 200-2411WIRCM</u>	<u>TEP 200-2412WIRCM</u>	<u>TEP 200-2413WIRCM</u>	<u>TEP 200-2415WIRCM</u>	<u>TEP 200-7215WIRCM</u>
<u>TEP 200-7216WIRCM</u>	<u>TEP 200-7218WIRCM</u>	<u>TEP 200-2416WIRCM</u>	<u>TEP 200-4818WIRCM</u>	<u>TEP 200-7212WIRCM</u>
<u>TEP 200-7213WIRCM</u>	<u>TEP 200-4813WIRCM</u>	<u>TEP 200-4815WIRCM</u>	<u>TEP 200-4816WIRCM</u>	<u>TEP 200-2418WIRCM</u>
<u>TEP 200-4812WIRCM</u>				