

- Compact DIP-24 plastic case
- I/O isolation 5000 VAC rated for 250 VAC working voltage
- IEC 60601-1 certification edition 3.2 for 2 x MOPP
- Risk management process according to ISO 14971 incl. risk management file
- Acceptance criteria for electronic assemblies acc. to IPC-A-610 Level 3
- Low leakage current <2 µA
- Operating temperature –40°C to 90°C
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- 5-year product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The THM 10 series is a range of medical 10 Watt DC/DC converters in DIP-24 plastic package with wide 2:1 input voltage range. They provide a reinforced isolation system for 5000 VAC and a very low leakage current of less than 2 µA. The units are approved to IEC/EN/ES 60601-1 ed. 3.2 for 2 x MOPP and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 89% and highest grade components the converters can reliably operate in an ambient temperature range of –40°C up to +90°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
THM 10-0510	4.5 - 9 VDC (5 VDC nom.)	3.3 VDC	2'500 mA	–5 VDC –12 VDC –15 VDC	1'000 mA 416 mA 333 mA	80 %
THM 10-0511		5 VDC	2'000 mA			84 %
THM 10-0512		12 VDC	830 mA			87 %
THM 10-0513		15 VDC	670 mA			87 %
THM 10-0515		24 VDC	416 mA			86 %
THM 10-0521		+5 VDC	1'000 mA			83 %
THM 10-0522		+12 VDC	416 mA			86 %
THM 10-0523		+15 VDC	333 mA			87 %
THM 10-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	2'500 mA	–5 VDC –12 VDC –15 VDC	1'000 mA 416 mA 333 mA	83 %
THM 10-1211		5 VDC	2'000 mA			86 %
THM 10-1212		12 VDC	830 mA			88 %
THM 10-1213		15 VDC	670 mA			89 %
THM 10-1215		24 VDC	416 mA			89 %
THM 10-1221		+5 VDC	1'000 mA			84 %
THM 10-1222		+12 VDC	416 mA			89 %
THM 10-1223		+15 VDC	333 mA			88 %
THM 10-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	2'500 mA	–5 VDC –12 VDC –15 VDC	1'000 mA 416 mA 333 mA	83 %
THM 10-2411		5 VDC	2'000 mA			87 %
THM 10-2412		12 VDC	830 mA			89 %
THM 10-2413		15 VDC	670 mA			89 %
THM 10-2415		24 VDC	416 mA			89 %
THM 10-2421		+5 VDC	1'000 mA			85 %
THM 10-2422		+12 VDC	416 mA			89 %
THM 10-2423		+15 VDC	333 mA			88 %
THM 10-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	2'500 mA	–5 VDC –12 VDC –15 VDC	1'000 mA 416 mA 333 mA	83 %
THM 10-4811		5 VDC	2'000 mA			87 %
THM 10-4812		12 VDC	830 mA			89 %
THM 10-4813		15 VDC	670 mA			89 %
THM 10-4815		24 VDC	416 mA			89 %
THM 10-4821		+5 VDC	1'000 mA			85 %
THM 10-4822		+12 VDC	416 mA			88 %
THM 10-4823		+15 VDC	333 mA			88 %

Options

on demand (backorder with MOQ non stocking item)	- Optional models with alternative pinning - Optional models with adjustable output voltage - Optional models with Remote On/Off function - Optional models with adjustable output and remote-control function
---	---

Input Specifications

Input Current	- At no load	5 Vin models: 20 mA typ. 12 Vin models: 10 mA typ. 24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ.
Surge Voltage		5 Vin models: 16 VDC max. (3 s max.) 12 Vin models: 25 VDC max. (3 s max.) 24 Vin models: 50 VDC max. (3 s max.) 48 Vin models: 100 VDC max. (3 s max.)
Under Voltage Lockout		5 Vin models: 3 VDC min. / 4 VDC typ. / 4.4 VDC max. 12 Vin models: 7 VDC min. / 8 VDC typ. / 8.8 VDC max. 24 Vin models: 15 VDC min. / 16 VDC typ. / 17.5 VDC max. 48 Vin models: 31.5 VDC min. / 33 VDC typ. / 34.5 VDC max.
Recommended Input Fuse		5 Vin models: 5'000 mA (slow blow) 12 Vin models: 2'000 mA (slow blow) 24 Vin models: 1'000 mA (slow blow) 48 Vin models: 500 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-10% to +20% (15 & 24 Vout single models) ±10% (other single and dual output models) (Only for optional models with adjustable output) (By external trim resistor) See application note: www.tracopower.com/overview/thm10 Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) - Cross Regulation (25% / 100% asym. load)	single output models: 0.2% max. dual output models: 0.5% max. single output models: 0.2% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) dual output models: 5% max.
Ripple and Noise (20 MHz Bandwidth)	- single output - dual output	3.3 Vout models: 30 mVp-p typ. (w/ 10 µF X7R) 5 Vout models: 30 mVp-p typ. (w/ 10 µF X7R) 12 Vout models: 40 mVp-p typ. (w/ 10 µF X7R) 15 Vout models: 40 mVp-p typ. (w/ 10 µF X7R) 24 Vout models: 50 mVp-p typ. (w/ 4.7 µF X7R) 5 / -5 Vout models: 30 / 30 mVp-p typ. (w/ 10 µF X7R) 12 / -12 Vout models: 40 / 40 mVp-p typ. (w/ 10 µF X7R) 15 / -15 Vout models: 40 / 40 mVp-p typ. (w/ 10 µF X7R)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Capacitive Load	- single output	3.3 Vout models:	3'000 µF max.
		5 Vout models:	2'500 µF max.
		12 Vout models:	430 µF max.
		15 Vout models:	350 µF max.
		24 Vout models:	125 µF max.
	- dual output	5 / -5 Vout models:	1'440 / 1'440 µF max.
		12 / -12 Vout models:	250 / 250 µF max.
		15 / -15 Vout models:	180 / 180 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.02 %/K max.
Start-up Time			30 ms typ.
Short Circuit Protection			Continuous, Automatic recovery
Output Current Limitation			150% typ. of Iout max.
Overvoltage Protection			112 - 151% of Vout nom. (depending on model) 3.7 - 5 VDC (3.3 VDC model) 5.6 - 7 VDC (5 VDC model) 13.5 - 16 VDC (12 VDC model) 18.3 - 22 VDC (15 VDC model) 29.1 - 34.5 VDC (24 VDC model) 5.6 - 7 VDC (±5 VDC model) 13.5 - 18.2 VDC (±12 VDC model) 17 - 22 VDC (±15 VDC model)
Transient Response	- Response Time		250 µs typ. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 60950-1
		EN 62368-1
		IEC 60950-1
		IEC 62368-1
		UL 60950-1
		UL 62368-1
	- Medical Equipment	EN 60601-1
		IEC 60601-1
		ANSI/AAMI ES 60601-1
	- Certification Documents	2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/thm10
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices)
		EN 55011 class A (internal filter)
		EN 55011 class B (with external filter)
		EN 55032 class A (internal filter)
		EN 55032 class B (with external filter)
		FCC 47 Part 18 class A (internal filter)
	- Radiated Emissions	FCC 47 Part 18 class B (with external filter)
		EN 55011 class A (internal filter)
		EN 55011 class B (with external filter)
		EN 55032 class A (internal filter)
		EN 55032 class B (with external filter)
		FCC 47 Part 18 class A (internal filter)
		FCC 47 Part 18 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/thm10

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMS (Immunity)	- Electrostatic Discharge	EN 60601-1-2 edition 4 (Medical Devices)
	- RF Electromagnetic Field	Air: EN 61000-4-2, ± 15 kV, perf. criteria A
	- EFT (Burst) / Surge	Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
	- Conducted RF Disturbances	EN 61000-4-3, 10 V/m, perf. criteria A
	- PF Magnetic Field	EN 61000-4-4, ± 2 kV, perf. criteria A
		EN 61000-4-5, ± 2 kV, perf. criteria A
		Ext. input component: 5 Vin models: KY 1000 μ F / 25 V V10P45
		12 & 24 Vin models: KY 470 μ F / 50 V
EMC / Environmental	- Certification Documents	48 Vin models: KY 330 μ F / 100 V
		EN 61000-4-6, 10 Vrms, perf. criteria A
		Continuous: EN 61000-4-8, 100 A/m, perf. criteria A
		1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
		www.tracopower.com/overview/thm10

General Specifications		
Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +90°C
	- Approved Ambient Temp.	+50°C max. (for compliance to 60601-1)
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	3.33 %/K above 75°C
		See application note: www.tracopower.com/overview/thm10
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote (passive = on)	On: 0 to 1.2 VDC or open circuit
		Off: 2.2 to 12 VDC
	- Off Idle Input Current	Refers to 'Remote' and '-Vin' Pin
	- Remote Pin Input Current	2.5 mA typ.
Altitude During Operation		-0.5 to 1.0 mA
Switching Frequency		(Only for optional models with remote-control)
Insulation System		5'000 m max.
Working Voltage (rated)		270 - 330 kHz (PWM)
Isolation Test Voltage	- Input to Output, 60 s	300 kHz typ. (PWM)
	- Input to Output, 1 s	Reinforced Insulation
Creepage	- Input to Output	250 VAC
Clearance	- Input to Output	5'000 VAC
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	10'000 VDC
Leakage Current	- Touch Current	8 mm min.
Reliability	- Calculated MTBF	8 mm min.
Washing Process		12 pF typ.
Environment	- Vibration	17 pF max.
	- Thermal Shock	2 μ A max. (240 VAC, 60 Hz)
Housing Material		3'850'000 h (MIL-HDBK-217F, ground benign)
Base Material		According to Cleaning Guideline
Potting Material		www.tracopower.com/info/cleaning.pdf
Pin Material		MIL-STD-810F
Pin Foundation Plating		MIL-STD-810F
Pin Surface Plating		Non-conductive Plastic (UL 94 V-0 rated)
Housing Type		Non-conductive Plastic (UL 94 V-0 rated)
Mounting Type		Silicone (UL 94 V-0 rated)
Connection Type		Copper
Footprint Type		Nickel (2 - 3 μ m)
		Tin (3 - 5 μ m), matte
		Plastic Case
		PCB Mount
		THD (Through-Hole Device)
		DIP24

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Soldering Profile	Lead-Free Wave Soldering 265°C / 10 s max.
Weight	14 g
Thermal Impedance	- Case to Ambient 18 K/W typ.
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) - RoHS Declaration - SCIP Reference Number 10de055b-467d-4f4c-a41b-b6d99e856463


Supporting Documents

Overview Link (for additional Documents)



www.tracopower.com/overview/thm10

Outline Dimensions

Standard pinning

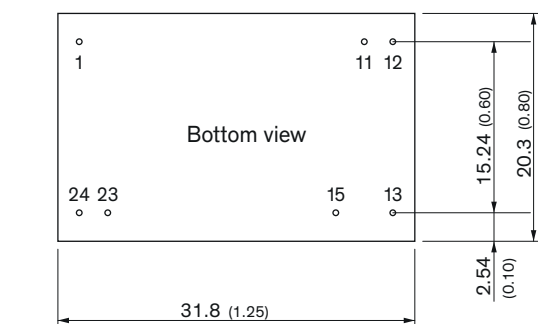


Pinout		
Pin	Single Output	Dual Output
1	+Vin (Vcc)	+Vin (Vcc)
11	No pin	Common
12	-Vout	No pin
13	+Vout	-Vout
15	No pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

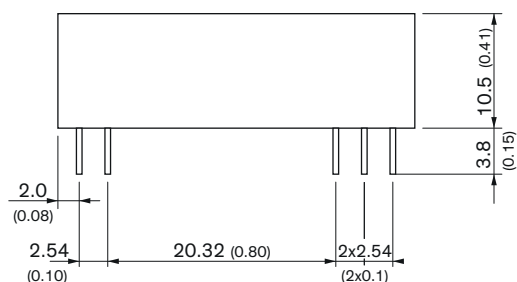

Dimensions in mm (inch)
Tolerances ± 0.5 (± 0.02)
Pin $\varnothing 0.6 \pm 0.1$ (0.024 ± 0.004)
Pin pitch tolerances ± 0.25 (± 0.01)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Optional models with alternative pinning, adjustable output and/or remote-control function

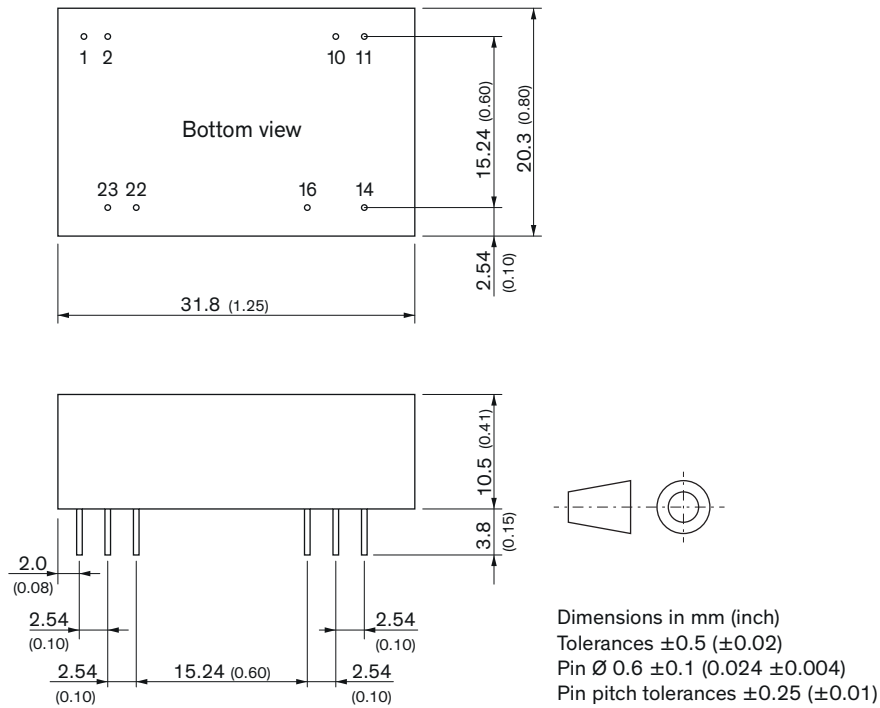

Pinout		
Pin	Single Output	Dual Output
1	No pin*/Remote	No pin*/Remote
2	-Vin (GND)	-Vin (GND)
10	No pin*/Trim	No pin*/Trim
11	NC**	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

NC: Not connected

*If Remote or Trim is not selected there is no pin on corresponding number.

**If Trim is selected there is no pin on corresponding number

Remark:

No optional pinning for 5 Vin models. Corresponding parts are with THM 10WI series by default.

see www.tracopower.com/overview/thm10wi

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TRACO Power:](#)

[THM 10-1222](#) [THM 10-0510](#) [THM 10-2421](#) [THM 10-2423](#) [THM 10-1223](#) [THM 10-1215](#) [THM 10-4821](#) [THM 10-4822](#) [THM 10-4812](#) [THM 10-0523](#) [THM 10-1212](#) [THM 10-4815](#) [THM 10-0522](#) [THM 10-1221](#) [THM 10-2410](#) [THM 10-2411](#) [THM 10-2422](#) [THM 10-1210](#) [THM 10-4823](#) [THM 10-0513](#) [THM 10-4813](#) [THM 10-0521](#) [THM 10-0512](#) [THM 10-4811](#) [THM 10-4810](#) [THM 10-1211](#) [THM 10-0511](#) [THM 10-0515](#) [THM 10-2412](#) [THM 10-2413](#) [THM 10-2415](#) [THM 10-1213](#)