


- High power density power supply (open frame)
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP
- Low leakage current <75 µA rated for BF applications
- EMC compliance to IEC 60601-1-2 4th edition
- Risk management process according to ISO 14971 incl. risk management file
- Acceptance criteria for electronic assemblies acc. to IPC-A-610 Level 3
- Protection class II
- Operating up to 5000 m altitude
- Ready to meet ErP directive, no load power consumption <60 mW
- 5-year product warranty

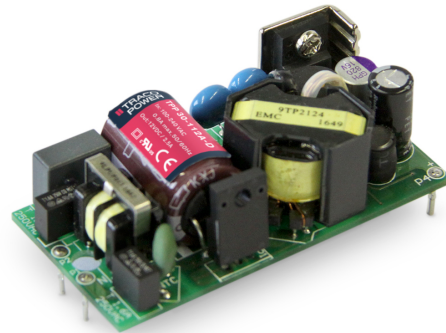

ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The TPP 30A-D AC/DC power supplies feature a reinforced double I/O isolation system according to medical safety standards IEC/EN/ES 60601-1 3rd edition for 2 x MOPP approved for an operating altitude of 5000 m. The earth leakage current is below 75 µA what makes the units suitable for BF (body floating) applications. The excellent efficiency of up to 92% offers a high power density in the packaging format 1.36" x 2.74". The full load operating temperature range covers -40°C to +60°C while it goes up to 85°C with 50% load derating. The units operate in compliance to the medical EMC emission and immunity levels according to latest standard IEC 60601-1-2 4th edition.

Models

Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TPP 30-103A-D	20 W	3.3 VDC (2.97 - 3.63 VDC)	6'000 mA	84 %
TPP 30-105A-D	30 W	5 VDC (4.5 - 5.5 VDC)	6'000 mA	87 %
TPP 30-109A-D		9 VDC (8.1 - 9.9 VDC)	3'340 mA	88 %
TPP 30-112A-D		12 VDC (10.8 - 13.2 VDC)	2'500 mA	91 %
TPP 30-115A-D		15 VDC (13.5 - 16.5 VDC)	2'000 mA	91 %
TPP 30-124A-D		24 VDC (21.6 - 26.4 VDC)	1'250 mA	90 %
TPP 30-136A-D		36 VDC (32.4 - 39.6 VDC)	840 mA	90 %
TPP 30-148A-D		48 VDC (43.2 - 52.8 VDC)	630 mA	92 %

Input Specifications

Input Voltage	- AC Range	85 - 264 VAC (Full Range)
	- DC Range	120 - 370 VDC (Designed for, no certification)
Input Frequency		47 - 63 Hz
Input Current	- Full Load & Vin = 230 VAC	400 mA max.
	- Full Load & Vin = 115 VAC	800 mA max.
Power Consumption	- At no load	60 mW max. (Ready to meet ErP directive)
Input Inrush Current	- At 230 VAC	40 A max.
Input Protection		T 1.6 A / 250 VAC (Internal Fuse in L & N)
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment		±10% (By external trim resistor)
		See application note: www.tracopower.com/overview/tpp30a-d
		Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	0.2% max.
	- Load Variation (0 - 100%)	0.7% max. (3.3 and 5 VDC model)
		0.5% max. (other output models)
Ripple and Noise (20 MHz Bandwidth)		50 mVp-p typ. (w/ 10 µF X7R)
Capacitive Load	3.3 VDC model:	10'000 µF max.
	5 VDC model:	12'000 µF max.
	9 VDC model:	3'720 µF max.
	12 VDC model:	2'085 µF max.
	15 VDC model:	1'350 µF max.
	24 VDC model:	520 µF max.
	36 VDC model:	235 µF max.
	48 VDC model:	130 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- At 115 VAC	16 ms min.
Start-up Time	- At 230 VAC	1'500 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		110 - 170% of Iout max.
		140% typ. of Iout max.
Overvoltage Protection		125 - 140% of Vout nom.
Transient Response	- Response Deviation	3% max. (50% to 75% Load Step)
	- Response Time	500 µs typ. (50% to 75% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Household	EN 60335-1 IEC 60335-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1
	- Power Transformers	2 x MOPP (Means Of Patient Protection) IEC 61558-1 IEC 61558-2-16
	- Certification Documents	www.tracopower.com/overview/tpp30a-d
Protection Class		Class II (Prepared): Reinforced Insulation

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Pollution Degree	PD 2
Over Voltage Category	OVC II

EMC Specifications

EMI Emissions		EN 60601-1-2 edition 4 (Medical Devices)
- Conducted Emissions		EN 55011 class B (internal filter)
		EN 55014-1 (internal filter)
		EN 55032 class B (internal filter)
		FCC Part 15 class B (internal filter)
		FCC Part 18 class B (internal filter)
- Radiated Emissions		EN 55011 class B (internal filter)
		EN 55014-1 (internal filter)
		EN 55032 class B (internal filter)
		FCC Part 15 class B (internal filter)
		FCC Part 18 class B (internal filter)
- Harmonic Current Emissions		EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3
EMS Immunity		EN 55024 (IT Equipment)
- Electrostatic Discharge		EN 60601-1-2 edition 4 (Medical Devices)
		EN 55014-2 (Household Appliances Tools)
	Air:	EN 61000-4-2, ± 15 kV, perf. criteria A
	Contact:	EN 61000-4-2, ± 8 kV, perf. criteria A
		EN 61000-4-3, 20 V/m, perf. criteria A
- RF Electromagnetic Field		EN 61000-4-4, ± 2 kV, perf. criteria A
	L to L:	EN 61000-4-5, ± 1 kV, perf. criteria A
		EN 61000-4-6, 20 Vrms, perf. criteria A
	Continuous:	EN 61000-4-8, 30 A/m, perf. criteria A
	230 VAC / 50 Hz:	EN 61000-4-11
- EFT (Burst) / Surge		30%, 25 periods, perf. criteria A
		60%, 1 period, perf. criteria A
		>95%, 1 period, perf. criteria A
		>95%, 250 periods, perf. criteria A
	115 VAC / 60 Hz:	EN 61000-4-11
- Conducted RF Disturbances		30%, 25 periods, perf. criteria A
		60%, 1 period, perf. criteria A
		>95%, 1 period, perf. criteria A
		>95%, 250 periods, perf. criteria A
- PF Magnetic Field		
- Voltage Dips & Interruptions		

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tpp30a-d
	- Low Input Voltage	
Cooling System		4 %/V below 90 VAC
Altitude During Operation		Natural convection (20 LFM)
Switching Frequency		5'000 m max.
Insulation System		30 - 60 kHz (PWM)
Working Voltage (rated)		Reinforced Insulation
Isolation Test Voltage		272 VAC
- Input to Output, 60 s		4'000 VAC
	- Input to Case or PE, 60 s	1'500 VAC
	- Output to Case or PE, 60 s	1'500 VAC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Leakage Current (at 264 VAC)	- Touch Current	75 μA max.

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Reliability	- Calculated MTBF	3'300'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	IEC 60068-2-6
	- Mechanical Shock	IEC 60068-2-27
Pin Material		Copper
Pin Foundation Plating		Nickel (2 - 3 µm)
Pin Surface Plating		Tin (3 - 5 µm), matte
Connection Type		THD (Through-Hole Device)
Weight		58 g
Environmental Compliance	- Reach	www.tracopower.com/info/reach-declaration.pdf
	- RoHS	www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tpp30a-d

Outline Dimensions

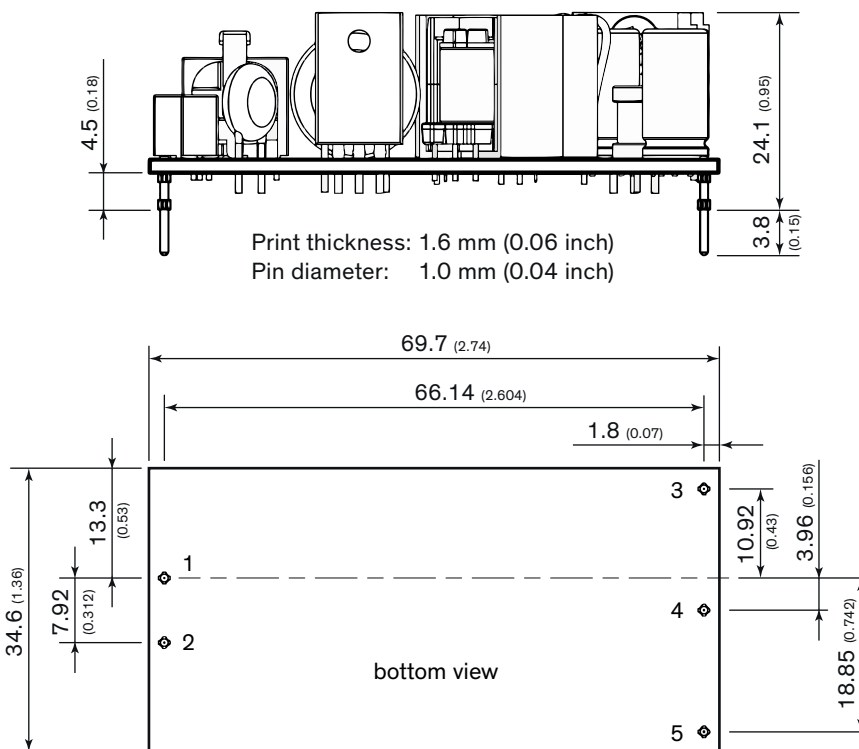

PCB Pinout	
Pin	Function
1	Neutral
2	Line
3	+Vout
4	-Vout
5	Trim

Dimension in mm, () = inch
Tolerances: x.x ±0.50 (±0.02)
 x.xx ±0.25 (±0.01)
Pin pitch tolerance: ±0.25 (±0.010)
Pin dimension tolerance: ±0.10 (±0.004)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TPP 30-103A-D](#) [TPP 30-115A-D](#) [TPP 30-109A-D](#) [TPP 30-105A-D](#) [TPP 30-124A-D](#) [TPP 30-136A-D](#) [TPP 30-148A-D](#) [TPP 30-112A-D](#)