

- Compact encapsulated 65 Watt Chassis mount module (4.3"x2.2")
- I/O isolation 4000 VAC rated for 250 VAC working voltage
- Certification according to IEC/EN/ES 60601-1 edition 3.2 for 2 x MOPP
- Risk management process according to ISO 14971 incl. risk management file
- Acceptance criteria for electronic assemblies acc. to IPC-A-610 Level 3
- Low leakage current <100 µA rated for BF applications
- Operating temperature -40°C to 80°C
- EMC compliance according to IEC 60601-1-2 4th edition and EN55032 class B
- Operating up to 5000m altitude
- 5-year product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The TPP 65E-J is a 65 Watt encapsulated AC/DC modules in a Chassis mount package. It features a reinforced double I/O isolation system according to latest medical safety standards (60601-1 edition 3.2, 2 x MOPP). The leakage current is below 100 µA and makes the module suitable for BF (body floating) applications. The excellent efficiency of up to 93% allows a high power density and compact design (4.3" x 2.2"). The operating temperature range is -40°C to +80°C with derating above 60°C. The EMC characteristic is dedicated for applications in industrial and medical fields. High reliability is provided by use of high quality components and an excellent thermal management making the TPP 65E-J an ideal solution for medical devices and for demanding safety and space critical applications.

Models				
Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TPP 65-105E-J	50 W	5 VDC (4.5 - 5.5 VDC)	10'000 mA	90 %
TPP 65-112E-J	65 W	12 VDC (10.8 - 13.2 VDC)	5'420 mA	93 %
TPP 65-115E-J		15 VDC (13.5 - 16.5 VDC)	4'340 mA	94 %
TPP 65-124E-J		24 VDC (21.6 - 26.4 VDC)	2'710 mA	94 %
TPP 65-136E-J		36 VDC (32.4 - 39.6 VDC)	1'810 mA	93 %
TPP 65-148E-J		48 VDC (43.2 - 52.8 VDC)	1'360 mA	93 %

Input Specifications

Input Voltage	- AC Range	Operational Range: 85 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
	- DC Range	Operational Range: 120 - 370 VDC (Designed for, no certification) Polarity: +DC: L / -DC: N
Input Frequency		Operational Range: 47 - 440 Hz Certified: 50/60 Hz
Power Consumption	- No load & Vin = 230 VAC	210 mW max. (Ready to meet ErP directive)
	- No load & Vin = 115 VAC	210 mW max.
Input Current	- Full load & Vin = 230 VAC	900 mA max.
	- Full load & Vin = 115 VAC	1'500 mA max.
Input Inrush Current	- At 230 VAC	80 A max.
	- At 115 VAC	30 A max.
Input Protection		T 3.15 A / 250 VAC (Internal Fuse L & N)
Recommended Input Fuse		3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment		±10% (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	0.2% max.
	- Load Variation (0 - 100%)	0.5% max.
Ripple and Noise (20 MHz Bandwidth)	5 VDC model:	100 mVp-p max. (w/ 10 µF)
	12 VDC model:	100 mVp-p max. (w/ 10 µF)
	15 VDC model:	100 mVp-p max. (w/ 10 µF)
	24 VDC model:	120 mVp-p max. (w/ 1 µF)
	36 VDC model:	120 mVp-p max. (w/ 1 µF)
	48 VDC model:	200 mVp-p max. (w/ 0.1 µF)
	5 VDC model:	75 mVp-p typ. (w/ 10 µF)
	12 VDC model:	75 mVp-p typ. (w/ 10 µF)
	15 VDC model:	75 mVp-p typ. (w/ 10 µF)
	24 VDC model:	75 mVp-p typ. (w/ 1 µF)
	36 VDC model:	75 mVp-p typ. (w/ 1 µF)
	48 VDC model:	150 mVp-p typ. (w/ 0.1 µF)
	5 VDC model:	20'000 µF max.
	12 VDC model:	4'520 µF max.
	15 VDC model:	2'900 µF max.
	24 VDC model:	1'130 µF max.
Capacitive Load	36 VDC model:	520 µF max.
	48 VDC model:	285 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- At 230 VAC	75 ms min.
	- At 115 VAC	16 ms min.
Start-up Time	- At 230 VAC	1'000 ms max.
	- At 115 VAC	1'000 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		120 - 180% of Iout max.
		145% typ. of Iout max.
Overvoltage Protection		125 - 140% of Vout nom.
		130% typ. of Vout nom.
Transient Response	- Response Deviation	3% max. (50% to 75% Load Step at 2.5 A/µs)
	- Response Time	600 µs typ. (50% to 75% Load Step at 2.5 A/µs)

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1
	- Certification Documents	2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/tpp65e-j
Protection Class		Class I & II (Prepared): Reinforced Insulation
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC 47 Part 15 class B (internal filter) FCC 47 Part 18 class B (internal filter)
	- Radiated Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC 47 Part 15 class B (internal filter) FCC 47 Part 18 class B (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3
EMS (Immunity)	- Electrostatic Discharge	EN 60601-1-2 edition 4 (Medical Devices)
		Air: EN 61000-4-2, ± 15 kV, perf. criteria A
		Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
		EN 61000-4-3, 20 V/m, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-4, ± 2 kV, perf. criteria A
		L to L: EN 61000-4-5, ± 1 kV, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-6, 20 Vrms, perf. criteria A
		Continuous: EN 61000-4-8, 30 A/m, perf. criteria A
		230 VAC / 50 Hz: EN 61000-4-11
		30%, 25 periods, perf. criteria A
EMC / Environmental	- Conducted RF Disturbances	>95%, 0.5 periods, perf. criteria A
		>95%, 1 period, perf. criteria A
		>95%, 250 periods, perf. criteria B
		115 VAC / 60 Hz: EN 61000-4-11
	- PF Magnetic Field	30%, 25 periods, perf. criteria A
		>95%, 0.5 periods, perf. criteria A
		>95%, 1 period, perf. criteria A
		>95%, 250 periods, perf. criteria B
	- Voltage Dips & Interruptions	
		www.tracopower.com/overview/tpp65e-j

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	Depending on model
	- Low Input Voltage	Depending on model
Cooling System	See application note: www.tracopower.com/overview/tpp65e-j	Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Regulator Topology		Flyback Converter
Switching Frequency		50 - 130 kHz (PWM QR)

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Insulation System	Reinforced Insulation
Working Voltage (rated)	250 VAC
Isolation Test Voltage	- Input to Output, 60 s - Input to Case or PE, 60 s - Output to Case or PE, 60 s
	4'000 VAC
	2'500 VAC
	2'500 VAC
Creepage	- Input to Output - Input to Case or PE - Output to Case or PE
	8 mm min.
	4 mm min.
	4 mm min.
Clearance	- Input to Output - Input to Case or PE - Output to Case or PE
	4 mm min.
	4 mm min.
	4 mm min.
Isolation Resistance	- Input to Output, 500 VDC
	100 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V
	1'250 pF typ. / 1'500 pF max.
Leakage Current	- Touch Current
	100 μA max.
Reliability	- Calculated MTBF
	1'494'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration
	IEC 60068-2-6
	5 g, 3 axis, sine sweep, 3x30 min, 5-500 Hz
	IEC 60068-2-27
	50 g, 3 axis, 11 ms
	MIL-STD-810F
	-40 to +85°C, 72 cycles, 30 min each
Housing Material	Plastic (UL 94 V-0 rated)
Potting Material	Silicone (UL 94 V-0 rated)
Housing Type	Plastic Case
Mounting Type	Chassis Mount
Connection Type	Pin Connector
Weight	295 g
Environmental Compliance	- REACH Declaration
	www.tracopower.com/info/reach-declaration.pdf
	REACH SVHC list compliant
	REACH Annex XVII compliant
	www.tracopower.com/info/rohs-declaration.pdf
	Exemptions: 7a, 7c-I
	(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	4d9386ca-0766-4eaf-91f2-fb72674e1c24
	- RoHS Declaration
	- SCIP Reference Number


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tpp65e-j


All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

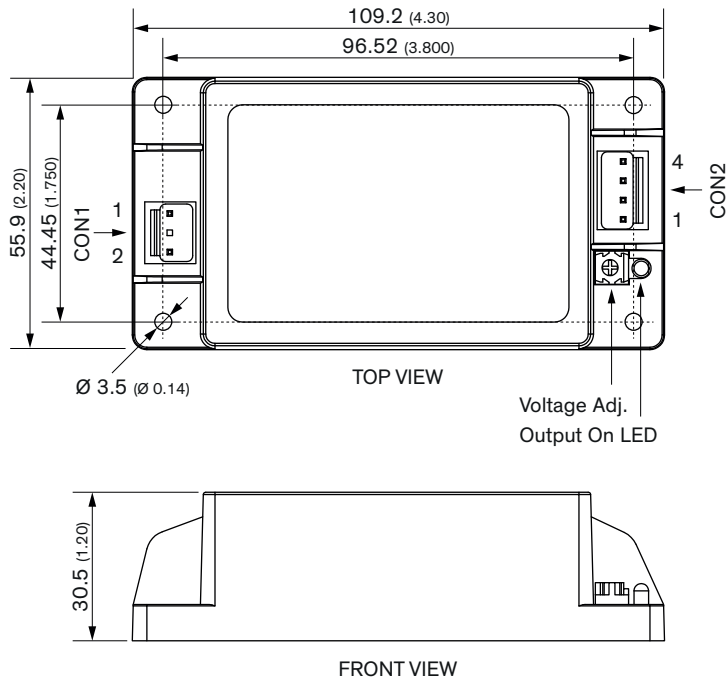

Mounting screw locked torque: Max. 0.33 Nm (3.4 kgfcm)

Dimensions in mm (inch)
 Tolerances: x.x ±0.5 (x.xx ±0.02)
 x.xx ±0.25 (x.xxx ±0.010)



Pin connectors

Input (CON1)		Output (CON2)	
Pin	Function	Pin	Function
1	Line	1, 2	-Vout
2	Neutral	3, 4	+Vout

Input: JST series
 mates with JST crimp terminal: SVH-21T-P1.1
 and terminal housing: VHR-3N

Output: JST series
 mates with JST crimp terminal: SVH-21T-P1.1
 and terminal housing: VHR-4N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TRACO Power:](#)

[TPP 65-105E-J](#) [TPP 65-112E-J](#) [TPP 65-115E-J](#) [TPP 65-124E-J](#) [TPP 65-136E-J](#) [TPP 65-148E-J](#)