

6-Channel LED Driver for LCD Panel Backlighting

1.0 Features

- 9V to 36V input power supply
- Integrated 6-channel LED drivers, 65V (max) per channel
- Patented BroadLED™ adaptive switch mode technology for high current matching at maximum efficiency
 - » Current matching accuracy $\pm 2\%$
 - » Enables use of cheaper, loosely binned LED arrays for lower BOM cost
- 300mA per channel average current, and 600mA for 3D mode with PWM duty up to 25%
- Integrated DC-DC boost controller
 - » 10V gate drive voltage
 - » Programmable switching frequency from 100KHz to 208KHz
 - » Internal soft start to limit the inrush current
- Supports two direct PWM dimming modes
 - » Multiple direct PWM inputs and multiple PWM outputs
 - » Single direct PWM input to multiple PWM output with phase shift for low EMI and low output ripple.
- Supports PWM tail shift mode
- Comprehensive protection features:
 - » LED open fault detection
 - » LED short fault detection
 - » Over-temperature shutdown
 - » Boost controller output over-current, over-voltage and UVLO protection
 - » Boost input UVLO protection
- Device available in SOP32 package

2.0 Description

The iW7016 is a high current, versatile, 6-channel LED driver. It integrates an internal step-up DC-DC converter to drive up to 6 separate strings of multiple series-connected LEDs.

The iW7016 provides high thermal performance by compensating for LED forward voltage mismatch with using Dialog's proprietary digital power management and patented BroadLED™ adaptive switch mode LED current regulation technologies.

The iW7016 has multiple features to protect the LED channels from fault conditions. These protections are employed on a cycle-by-cycle basis to ensure system reliability and provide consistent operation.

3.0 Applications

- LED backlighting for LCD-TV sets and LCD monitors

6-Channel LED Driver for LCD Panel Backlighting

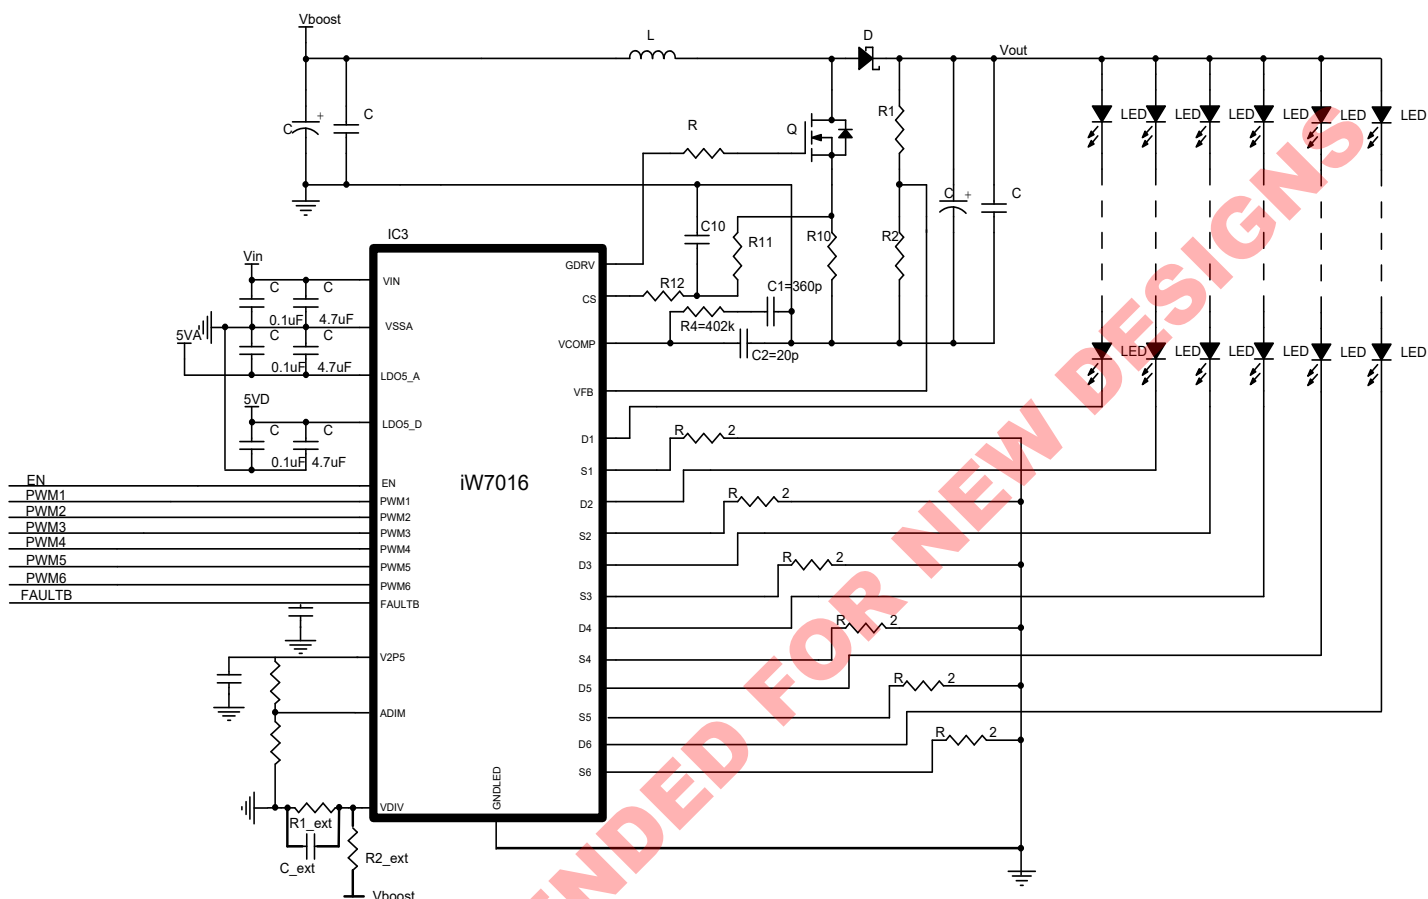


Figure 3.1 : iW7016 Typical Application Diagram

6-Channel LED Driver for LCD Panel Backlighting

4.0 Pinout Description

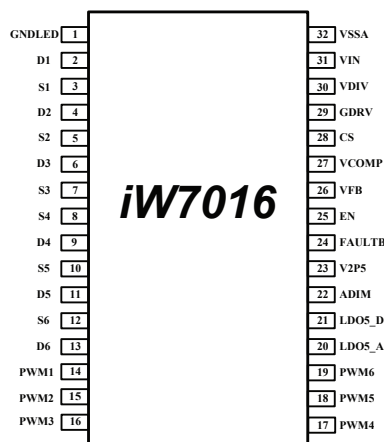


Figure 4.1 : SOP-32

Pin #	Name	Type	Pin Description
1	GNDLED	GND	Ground for internal MOSFET LED driver
2	D1	AI	Drain of internal MOSFET LED driver
3	S1	AI	Source of internal MOSFET LED driver
4	D2	AI	Drain of internal MOSFET LED driver
5	S2	AO	Source of internal MOSFET LED driver
6	D3	AI	Drain of internal MOSFET LED driver
7	S3	AO	Source of internal MOSFET LED driver
8	S4	AO	Source of internal MOSFET LED driver
9	D4	AI	Drain of internal MOSFET LED driver
10	S5	AO	Source of internal MOSFET LED driver
11	D5	AI	Drain of internal MOSFET LED driver
12	S6	AO	Source of internal MOSFET LED driver
13	D6	AI	Drain of internal MOSFET LED driver
14	PWM1	DI	PWM input, internally pulled down (100K)
15	PWM2	DI	PWM input, internally pulled down (100K); NC in single direct PWM mode
16	PWM3	DI	PWM input, internally pulled down (100K); NC in single direct PWM mode
17	PWM4	DI	PWM input, internally pulled down (100K); NC in single direct PWM mode

6-Channel LED Driver for LCD Panel Backlighting

Pinout Description (cont.)

Pin #	Name	Type	Pin Description
18	PWM5	DI	PWM input, internally pulled down (100K); NC in single direct PWM mode
19	PWM6	DI	PWM input, internally pulled down (100K); NC in single direct PWM mode
20	LDO5_A	Power	Connects to decoupling cap for internal generated 5V analog supply
21	LDO5_D	Power	Connects to decoupling cap for internal generated 5V digital supply
22	ADIM	AI	Analog dimming control input
23	V2P5	AI	2.5V reference for ADIM
24	FAULTB	DO	Fault output, open drain (active low)
25	EN	DI	Chip enable signal
26	VFB	AI	Boost controller voltage feedback pin
27	VCOMP	AO	Boost controller loop compensation pin
28	CS	AI	Boost output current sense pin
29	GDRV	AI	Boost gate drive for external MOSFET
30	VDIV	AI	Boost input UVLO detection pin
31	VIN	Power	Chip input power
32	VSSA	GND	Quiet analog ground

6-Channel LED Driver for LCD Panel Backlighting

5.0 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded. For maximum safe operating conditions, refer to the iW7016 datasheet.

Parameter	Symbol	Value	Units
DC supply voltage at V_{IN}	V_{IN}	-0.3 to 36	V
Maximum voltage for 5V pins	V_{5V}	-0.3 to 7	V
Maximum voltage for pin D1-D6	V_{DX}	-0.3 to 65	V
Latch-up immunity	$I_{LATCHUP}$	-100 to 100	mA
Storage temperature	T_{STRG}	-55 to 150	°C
Humidity		5 to 85	%
Electrostatic discharge on all 5V pins	V_{ESD}	-2000 to 2000	V
Body temperature during soldering	T_{BODY}	0 to 260	°C

6.0 Recommended Operating conditions

Parameter	Min	Typ	Max	Units
Thermal resistance junction (2-Layer JEDEC board)		61.57		°C/W
Operating temperature	-40		85	°C
Junction temperature	-40		150	°C
LEDn voltage			65	V
Supply voltage	9		36	V

6-Channel LED Driver for LCD Panel Backlighting

7.0 Physical Dimensions

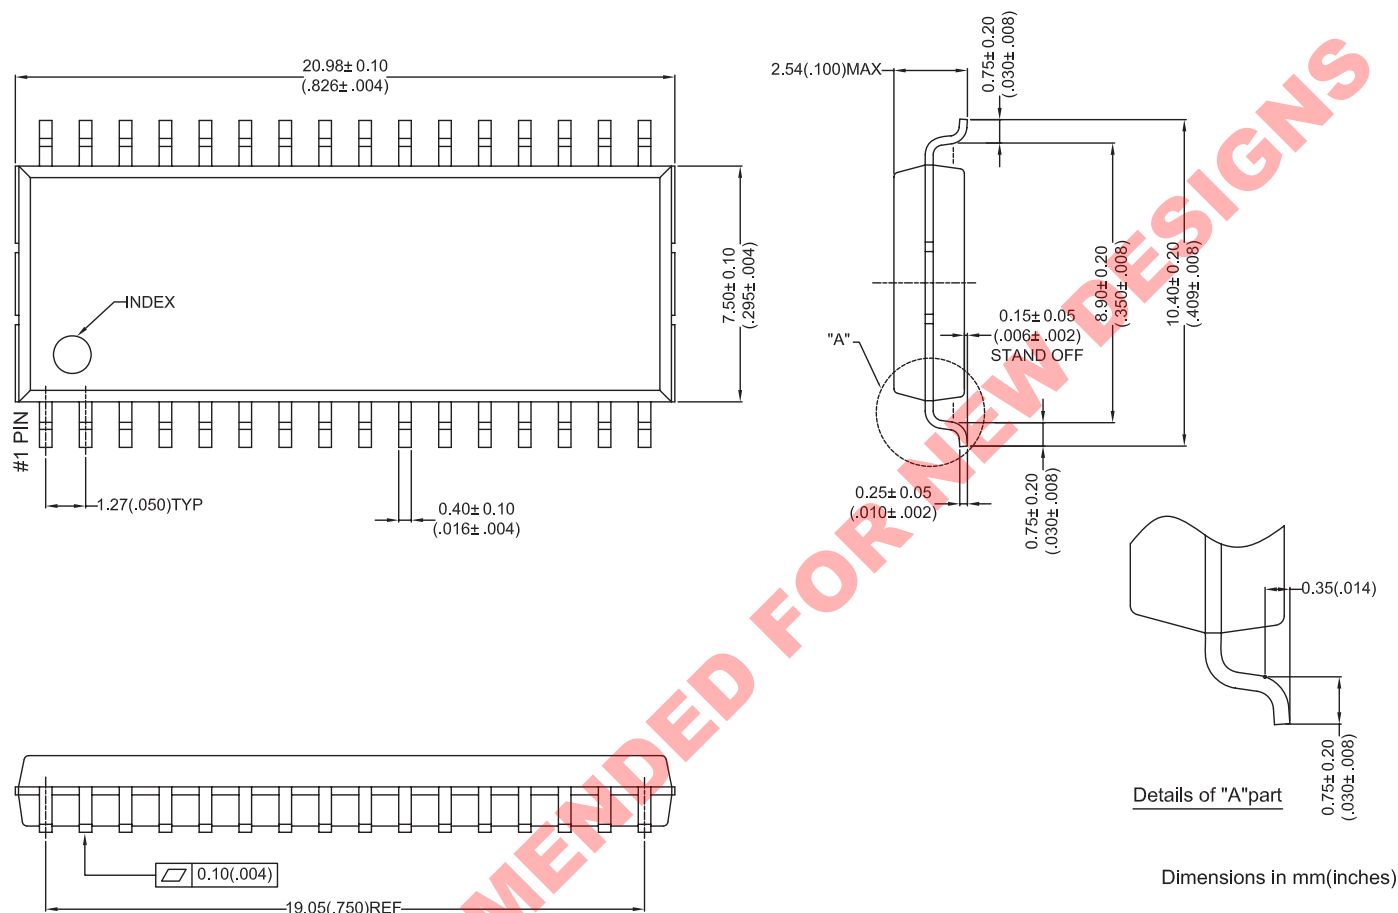


Figure 7.1 : Physical Dimensions for SOP-32

8.0 Ordering Information

Part Number	Options	Package	Description
iW7016-00-SO32		SOP-32	Tape and Reel ¹
iW7016-01-SO32	Tail mode, Short level = 12V, ADP range = 150%, Boost switching freq = 138kHz, 1 IN 6 OUT	SOP-32	Tape and Reel ¹
iW7016-02-SO32	Head mode, Short level = 6V, ADP range = 150%, Boost switching freq = 100kHz, 6 IN 6 OUT	SOP-32	Tape and Reel ¹

Note 1: Tape and Reel packing quantity is 1,000/reel. Minimum ordering quantity is 1,000.

6-Channel LED Driver for LCD Panel Backlighting

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Dialog Semiconductor:](#)

[iW7016-02-SO32](#)