

# ISL29102

Low Power Ambient Light-to-Voltage Nonlinear Converter

FN6483  
Rev.2.00  
Nov 17, 2016

The [ISL29102](#) is a low cost, light-to-voltage silicon optical sensor combining a photodiode array, a nonlinear current amplifier, and a micro-power op amp on a single monolithic IC. Similar to human eyes, the photodiode array has peak sensitivity at 550nm and spans from 400nm to 600nm, rejecting UV light and IR light. The input luminance range is from 0.3 lux to 10,000 lux.

The integrated nonlinear current amplifier boosts and converts the photodiode signal in a square root fashion, extending the light input dynamic range, while maintaining excellent sensitivity at dim conditions with low lux levels. The device consumes minimal power over a wide range of ambient lux levels because the current consumption ramps at a square root fashion. A dark-current compensation circuit minimizes the effect of temperature-dependent leakage currents in the absence of light, improving the light sensitivity at low lux levels while maintaining excellent sensitivity at low lux levels. The built-in 1μA op amp gives the ISL29102 an output voltage driving advantage for heavier loads.

The ISL29102 is housed in an ultra compact 2mmx2.1mm ODFN plastic case surface mount package. Operation is rated from -40°C to +85°C.

## Related Literature

- For a full list of related documents, visit our website
  - [ISL29102](#) product page

## Features

- Square root voltage output
- 0.3 lux to 10,000 lux range
- 1.8V to 3.3V supply range
- Close to human eye spectral response
- Fast response time
- Internal temperature compensation
- Good IR rejection
- Low supply current
- Operating temperature range -40°C to +85°C
- 6 Ld ODFN: 2mmx2.1mmx0.7mm
- Pb-free (RoHS compliant)

## Applications

- Display and keypad dimming for:
  - Mobile devices: smart phone, PDA, GPS
  - Computing devices: notebook PC, webpod
  - Consumer devices: LCD-TV, digital picture frame, digital camera
- Industrial and medical light sensing

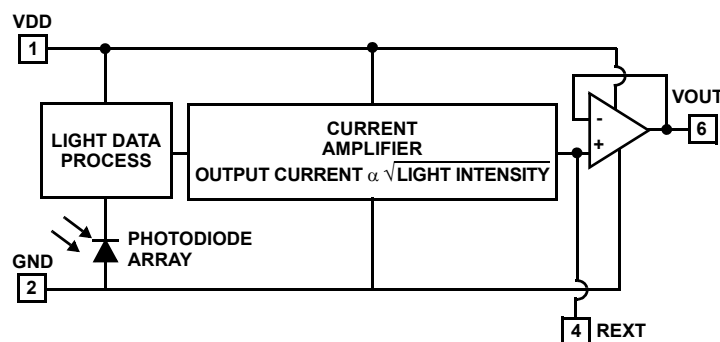


FIGURE 1. SIMPLIFIED BLOCK DIAGRAM


## Ordering Information

| PART NUMBER<br>(Notes 1, 2, 3) | TEMP RANGE<br>(°C) | TAPE AND REEL<br>(UNITS) | PACKAGE<br>(RoHS COMPLIANT) | PKG.<br>DWG. # |
|--------------------------------|--------------------|--------------------------|-----------------------------|----------------|
| ISL29102IROZ-T7                | -40 to +85         | 3k                       | 6 Ld ODFN                   | L6.2x2.1       |
| ISL29102IROZ-T7A               | -40 to +85         | 250                      | 6 Ld ODFN                   | L6.2x2.1       |
| ISL29102IROZ-EVALZ             |                    | Evaluation Board         |                             |                |

### NOTES:

1. Refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and NiPdAu plate - e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), see the device information page for the [ISL29102](#). For more information on MSL, see techbrief [TB363](#).

## Pin Configuration



## Pin Descriptions

| PIN NUMBER | PIN NAME | PIN DESCRIPTION                                                                         |
|------------|----------|-----------------------------------------------------------------------------------------|
| 1          | VDD      | Supply (1.8V to 3.3V).                                                                  |
| 2          | GND      | Ground                                                                                  |
| 3          | NC       | No connect                                                                              |
| 4          | REXT     | Connected to an external resistor to GND setting the light-to-voltage scaling constant. |
| 5          | NC       | No connect                                                                              |
| 6          | VOUT     | Voltage Output                                                                          |
| -          | PD       | Thermal pad. The thermal pad can be connected to GND or electrically isolated.          |

**Absolute Maximum Ratings** ( $T_A = +25^\circ\text{C}$ )

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Supply Voltage Between VDD and GND | 3.6V                                |
| $R_{EXT}$                          | (-0.5V + GND) to (0.5V + $V_{DD}$ ) |
| $V_{OUT}$                          | (-0.5V + GND) to (0.5V + $V_{DD}$ ) |
| $V_{OUT}$ Short-Circuit Current    | <10mA                               |
| ESD Rating                         |                                     |
| Human Body Model                   | 3kV                                 |
| Machine Model                      | 300V                                |

**Thermal Information**

|                                                                  |                                               |
|------------------------------------------------------------------|-----------------------------------------------|
| Thermal Resistance (Typical)                                     | $\theta_{JA}$ ( $^\circ\text{C/W}$ )          |
| 6 Ld ODFN (Note 4)                                               | 88                                            |
| Maximum Die Temperature                                          | +90 $^\circ\text{C}$                          |
| Storage Temperature                                              | -40 $^\circ\text{C}$ to +100 $^\circ\text{C}$ |
| Operating Temperature                                            | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$  |
| Pb-Free Reflow Profile (*)                                       | see <a href="#">TB477</a>                     |
| *Peak temperature during solder reflow +235 $^\circ\text{C}$ max |                                               |

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

**NOTE:**

4.  $\theta_{JA}$  is measured in free air with the component mounted on a high effective thermal conductivity test board with “direct attach” features. See Tech Brief [TB379](#).

**Electrical Specifications**  $V_{DD} = 3\text{V}$ ,  $T_A = +25^\circ\text{C}$ ,  $R_{EXT} = 100\text{k}\Omega$ , no load at  $V_{OUT}$ , green LED light, unless otherwise specified.

| SYMBOL           | PARAMETER                                                                                 | TEST CONDITION                              | MIN<br>(Note 5) | TYP                    | MAX<br>(Note 5) | UNIT          |
|------------------|-------------------------------------------------------------------------------------------|---------------------------------------------|-----------------|------------------------|-----------------|---------------|
| E                | Range of Input Light Intensity for Square Root Relationship to be Held                    |                                             |                 | 0.3 - 10k              |                 | Lux           |
| $V_{DD}$         | Operating Supply Voltage                                                                  |                                             | 1.8             |                        | 3.3             | V             |
| $I_{DD}$         | Supply Current                                                                            | E = 0 lux                                   |                 | 0.65                   |                 | $\mu\text{A}$ |
|                  |                                                                                           | E = 100 lux                                 |                 | 3.5                    |                 | $\mu\text{A}$ |
|                  |                                                                                           | E = 1,000 lux                               |                 | 10                     | 15              | $\mu\text{A}$ |
| $V_{OUT0}$       | Light-to-Voltage Accuracy                                                                 | E = 100 lux                                 |                 | 0.185                  |                 | V             |
| $V_{OUT1}$       | Light-to-Voltage Accuracy                                                                 | E = 1000 lux                                | 0.460           | 0.580                  | 0.680           | V             |
| $V_{DARK}$       | Voltage Output in the Absence of Light                                                    | E = 0 lux, $R_{EXT} = 10\text{M}\Omega$     |                 | 20                     | 50              | mV            |
| $\Delta V_{OUT}$ | Output Voltage Variation Over Three Light Sources: Fluorescent, Incandescent, and Halogen |                                             |                 | 10                     |                 | %             |
| PSRR             | Power Supply Rejection Ratio                                                              | E = 100 lux, $V_{DD} = 1.8\text{V}$ to 3.6V |                 | 2.5                    |                 | mV/V          |
| $V_{O-CMPL}$     | Maximum Output Compliance Voltage at 95% of Nominal Output                                |                                             |                 | $V_{DD} - 0.7\text{V}$ |                 | V             |
| $V_{O-MAX}$      | Maximum Output Voltage Swing                                                              |                                             |                 |                        | $V_{DD}$        | V             |
| $t_R$            | Rise Time                                                                                 | E = 0 lux to 300 lux                        |                 | 68                     |                 | $\mu\text{s}$ |
|                  |                                                                                           | E = 0 lux to 1000 lux                       |                 | 68                     |                 | $\mu\text{s}$ |
| $t_F$            | Fall Time                                                                                 | E = 300 lux to 0 lux                        |                 | 1830                   |                 | $\mu\text{s}$ |
|                  |                                                                                           | E = 1000 lux to 0 lux                       |                 | 970                    |                 | $\mu\text{s}$ |
| $t_D$            | Delay Time for Rising Edge                                                                | E = 0 lux to 300 lux                        |                 | 352                    |                 | $\mu\text{s}$ |
|                  |                                                                                           | E = 0 lux to 1000 lux                       |                 | 145                    |                 | $\mu\text{s}$ |
| $t_S$            | Delay Time for Falling Edge                                                               | E = 300 lux to 0 lux                        |                 | 22                     |                 | $\mu\text{s}$ |
|                  |                                                                                           | E = 1000 lux to 0 lux                       |                 | 22                     |                 | $\mu\text{s}$ |
| ISC              | Short Circuit Current of Op Amp                                                           |                                             |                 | $\pm 11$               |                 | mA            |
| SR               | Slew Rate of Op Amp                                                                       |                                             |                 | $\pm 10$               |                 | V/ms          |
| VOS              | Offset Voltage of Op Amp                                                                  |                                             |                 | $\pm 1.2$              |                 | mV            |

**NOTE:**

5. Compliance to datasheet limits is assured by one or more methods: production test, characterization, and/or design.

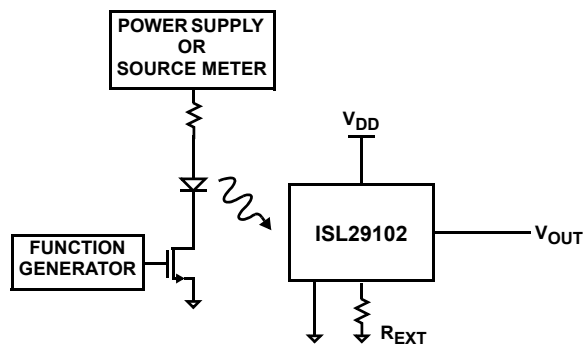


FIGURE 2. TEST CIRCUIT FOR RISE/FALL TIME MEASUREMENT

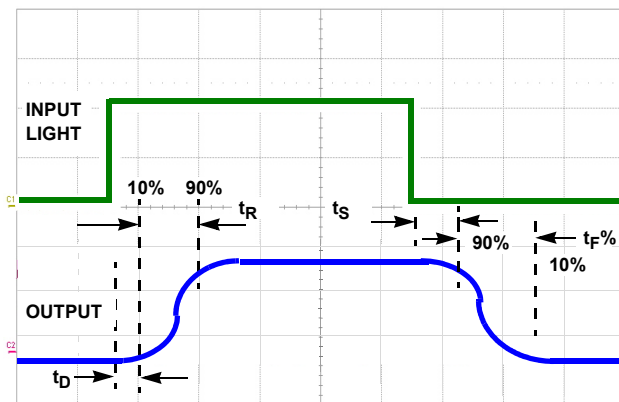


FIGURE 3. TIMING DIAGRAM

## Typical Performance Curves

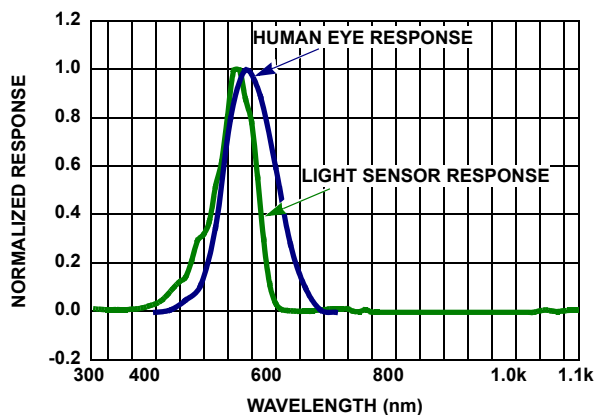


FIGURE 4. SPECTRAL RESPONSE

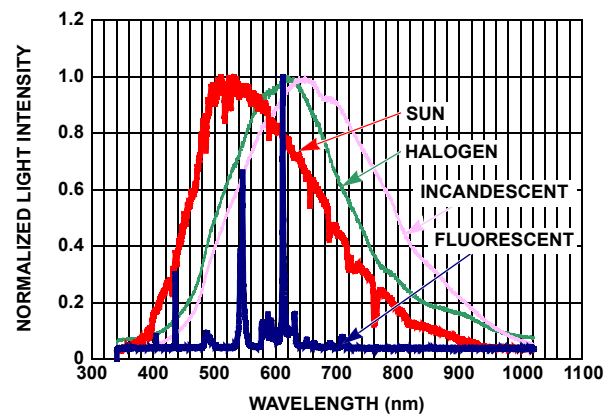


FIGURE 5. SPECTRUM OF LIGHT SOURCES

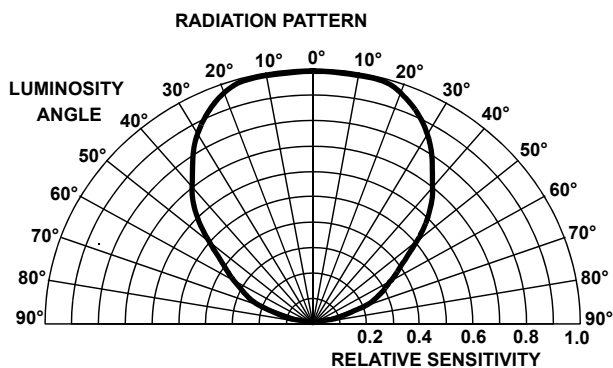


FIGURE 6. RADIATION PATTERN

## Typical Performance Curves (Continued)

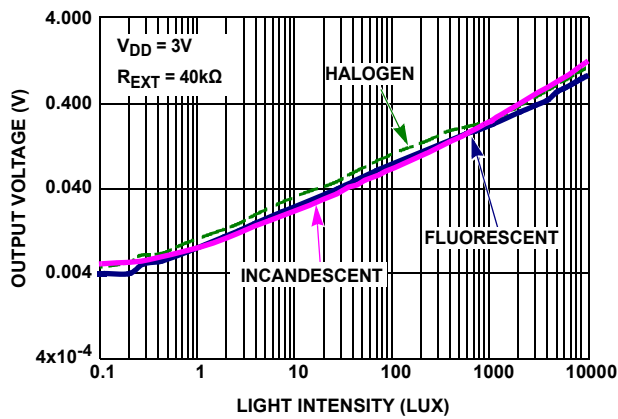


FIGURE 7. OUTPUT VOLTAGE vs LIGHT INTENSITY

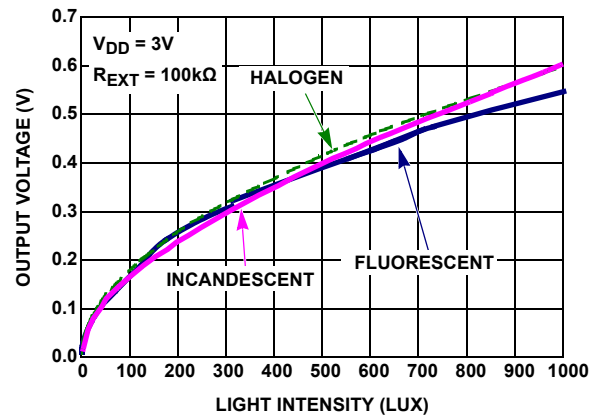


FIGURE 8. OUTPUT VOLTAGE vs LIGHT INTENSITY

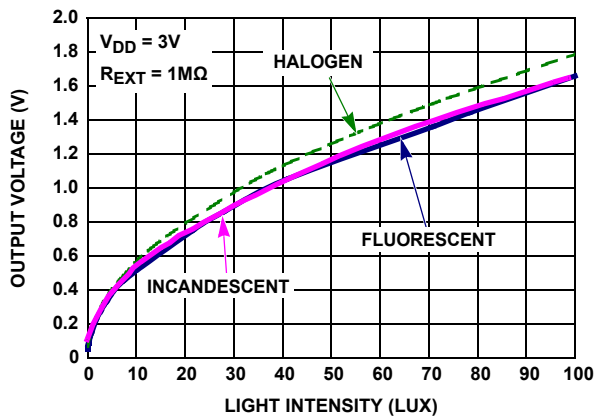


FIGURE 9. OUTPUT VOLTAGE vs LIGHT INTENSITY

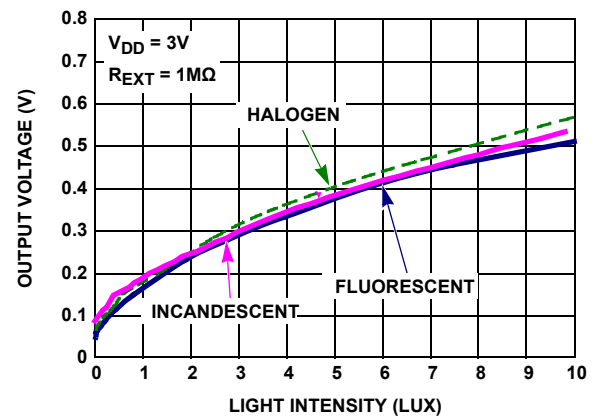


FIGURE 10. OUTPUT VOLTAGE vs LIGHT INTENSITY

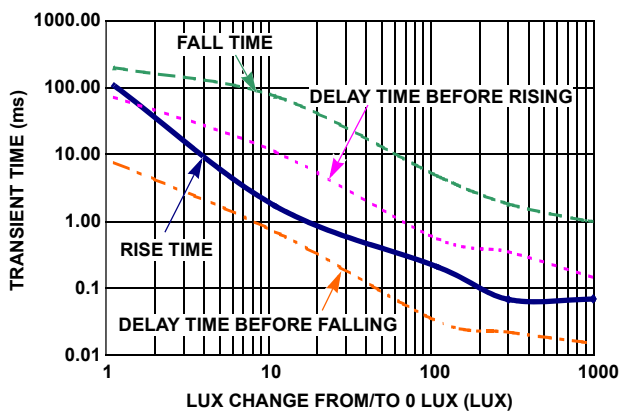


FIGURE 11. TRANSIENT TIME vs LUX CHANGE FROM/TO 0 LUX

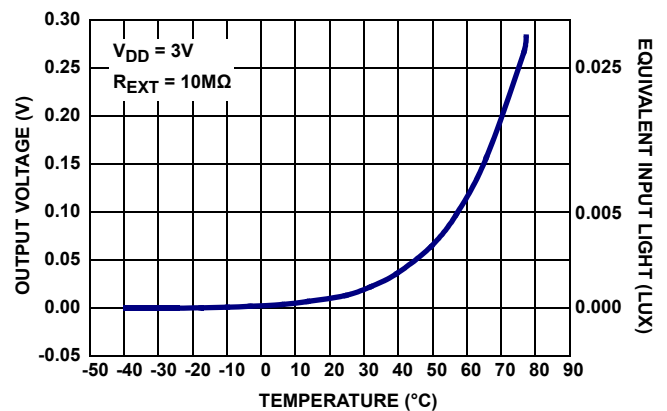


FIGURE 12. OUTPUT VOLTAGE vs TEMPERATURE AT 0 LUX

## Typical Performance Curves (Continued)

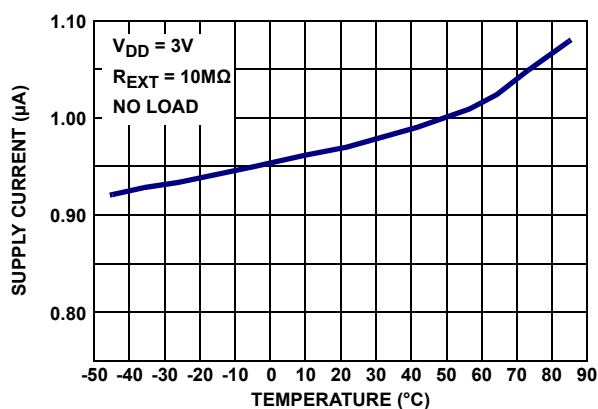


FIGURE 13. SUPPLY CURRENT vs TEMPERATURE AT 0 LUX

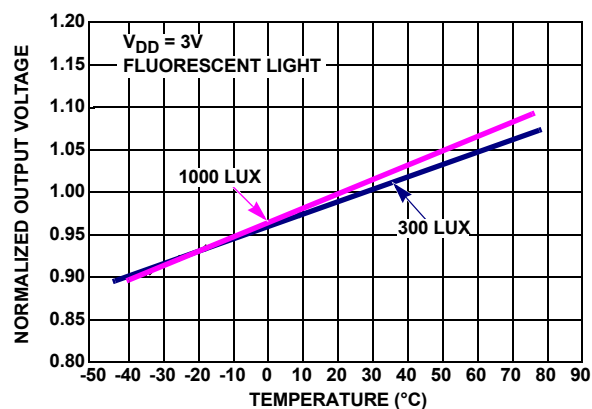


FIGURE 14. NORMALIZED OUTPUT VOLTAGE vs TEMPERATURE

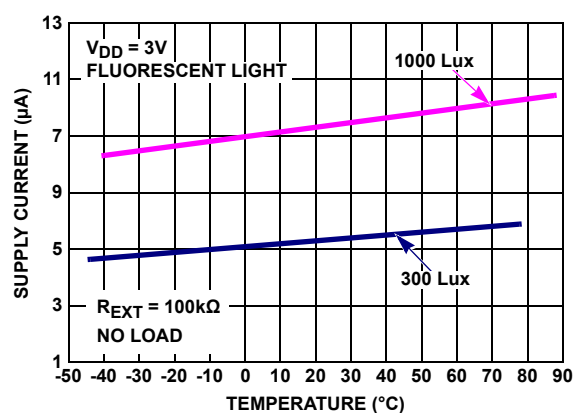


FIGURE 15. SUPPLY CURRENT vs TEMPERATURE

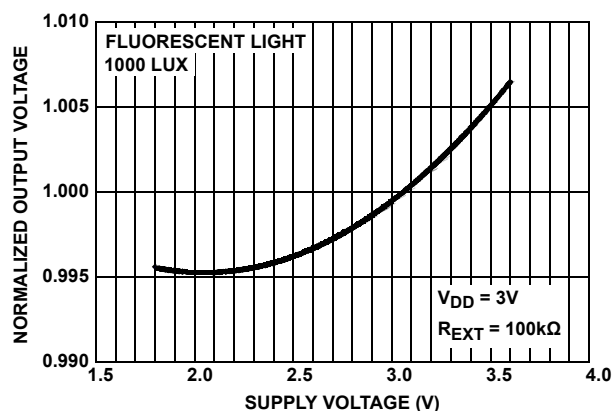


FIGURE 16. NORMALIZED OUTPUT VOLTAGE vs SUPPLY VOLTAGE

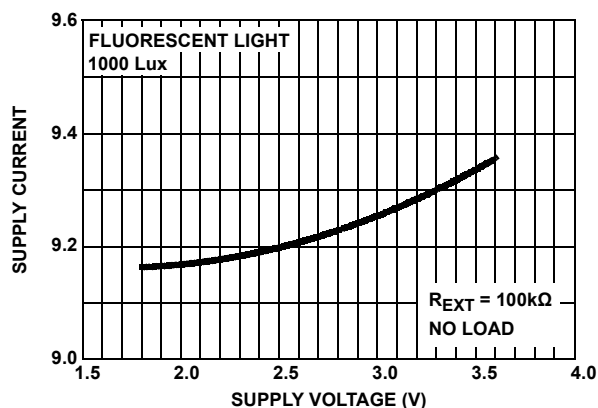


FIGURE 17. SUPPLY CURRENT vs SUPPLY VOLTAGE

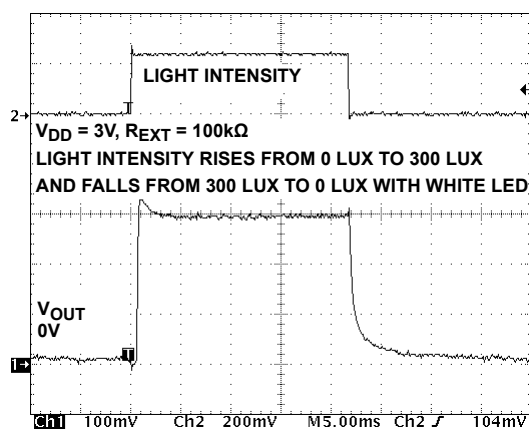


FIGURE 18. TRANSIENT RESPONSE OF ISL29102 TO CHANGE IN LIGHT INTENSITY

## Application Information

### Light-to-Voltage Conversion

The ISL29102 has responsiveness that is a square-root function of the light intensity intercepted by the photodiode in lux. Because the photodiode has a responsivity that resembles the human eye, conversion rate is independent of the light source (fluorescent light, incandescent light, or direct sunlight).

$$V_{OUT} = \frac{1.8\mu A}{\sqrt{100\text{lux}}} \sqrt{E} \times R_{EXT} \quad (\text{EQ. 1})$$

In Equation 1,  $V_{OUT}$  is the output voltage,  $E$  is the light intensity, and  $R_{EXT}$  is the value of the external resistor. The  $R_{EXT}$  is used to set the light-to-voltage scaling constant. The compliance of the

ISL29102's output circuit may result in premature saturation when an excessively large  $R_{EXT}$  is used. The output compliance voltage is 700mV below the supply voltage as listed in  $V_{O-MAX}$  of the "Electrical Specifications" table on [page 3](#).

### Optical Sensor Location Outline

The green area in [Figure 19](#) shows the optical sensor location outline of ISL29102. Along the pinout direction, the center line (CL) of the sensor coincides with that of the packaging. The sensor width in this direction is 0.39mm. Perpendicular to the pinout direction, the CL of the sensor has an 0.19mm offset from the CL of packaging away from pin 1. The sensor width in this direction is 0.46mm.

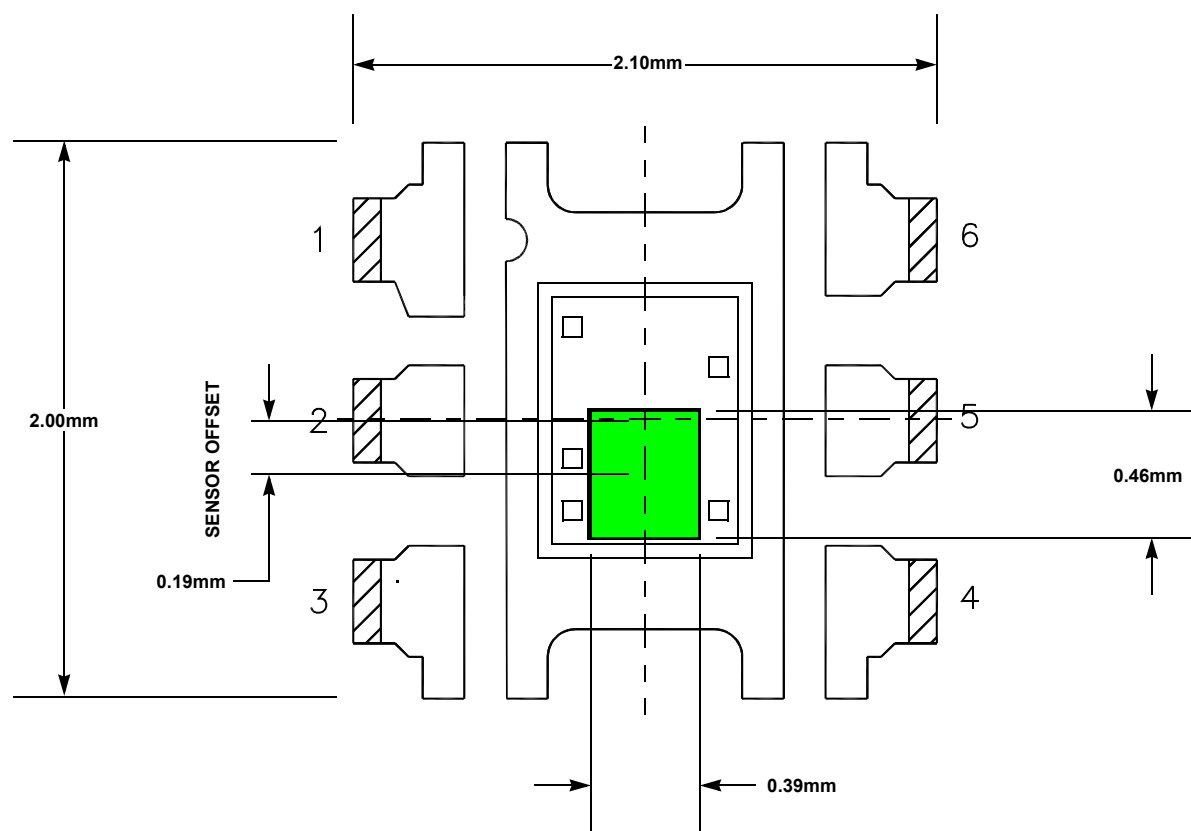


FIGURE 19. 6 LD ODFN SENSOR LOCATION OUTLINE

## Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please visit our website to make sure you have the latest revision.

| DATE              | REVISION | CHANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| November 17, 2016 | FN6483.2 | <ul style="list-style-type: none"> <li>Updated datasheet to new standards.</li> <li>Moved Ordering Information table to page 2. Added ISL29102IROZ-T7A.</li> <li>Removed Important note above Electrical spec table and added Note 5.</li> <li>Updated POD from rev 2 to rev 4. Changes were:               <ul style="list-style-type: none"> <li>Added "MAX 0.75" dimension to Side View</li> <li>Changed Note 5 From: Tiebar shown (if present) is a non-functional feature.</li> <li>To: Tiebar shown (if present) is a non-functional feature and maybe located on any of the 4 sides (or ends).</li> <li>Updated Arrows to correct arrow type.</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| December 12, 2008 | FN6483.1 | <p>Added MSL Note 3 to "Ordering Information" to page 2.</p> <p>Corrected Eval board name from ISL29102IROZEVALZ to ISL29102IROZ-EVALZ in "Ordering Information" on page 2.</p> <p>Added "Related Literature" on page 1 per new data sheet standards.</p> <p>Updated Theta JA in "Thermal Information" on page 3 from 90C/W to 88C/W per ASYD in Intrepid. Added Note 4.</p> <p>Revised VO-MAX spec in "Electrical Specifications" table on page 3 from:<br/>       Description: Maximum Output Compliance voltage at 95% of nominal output<br/>       TYP: VDD - 0.7V<br/>       To:<br/>       Description: Maximum Output Voltage Swing<br/>       TYP: removed (was VDD - 0.7V)<br/>       MAX: added "VDD"</p> <p>Added new spec to "Electrical Specifications" table on page 3 as follows:<br/>       VO-CMPL<br/>       Description: Maximum Output Compliance voltage at 95% of nominal output<br/>       TYP: VDD - 0.7V</p> <p>Updated package outline drawing L6.2x2.1 on page 9 to most recent revision. Changes to POD were:<br/>       Changing the way we dimension the solder pad recommendation on the PODs. Changes inc:<br/>       Bottom View: Added dimension callouts for solder pad<br/>       Land Pattern: Added package outline and package outline dimensions.<br/>       Added lead width of 6x0.30±0.05 and note 4 callout to bottom view<br/>       Increased the size of the pin 1 shaded area</p> <p>Added "Revision History" on page 8 &amp; "Products" on page 8 per new data sheet standards.</p> |
| July 1, 2008      | FN6483.0 | Initial release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



## About Intersil

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing, and high-end consumer markets. For the most updated datasheet, application notes, related documentation, and related parts, see the respective product information page found at [www.intersil.com](http://www.intersil.com).

You may report errors or suggestions for improving this datasheet by visiting [www.intersil.com/ask](http://www.intersil.com/ask).

Reliability reports are also available from our website at [www.intersil.com/support](http://www.intersil.com/support).

© Copyright Intersil Americas LLC 2008-2016. All Rights Reserved.  
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

---

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

---

*Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

---

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)


# Package Outline Drawing

For the most recent package outline drawing, see [L6.2x2.1](#).

## L6.2x2.1

6 LEAD OPTICAL DUAL FLAT NO-LEAD PLASTIC PACKAGE (ODFN)

Rev 4, 2/15

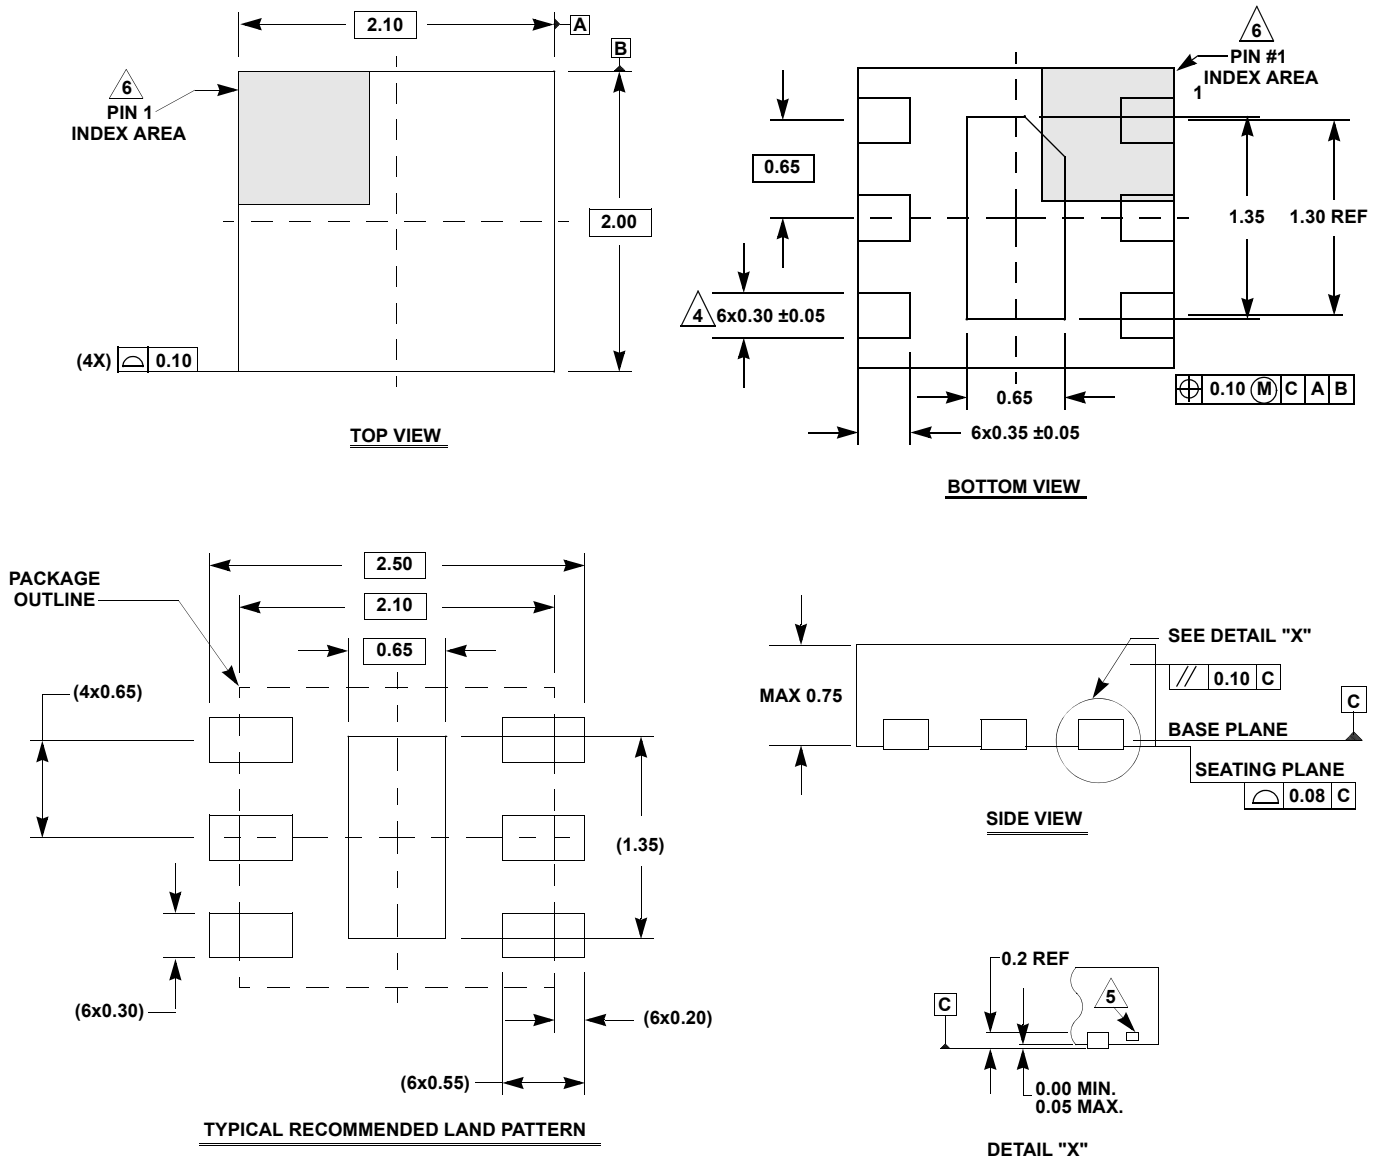

### NOTES:

1. Dimensions are in millimeters.  
Dimensions in ( ) for Reference Only.
2. Dimensioning and tolerancing conform to ASME Y14.5m-1994.
3. Unless otherwise specified, tolerance: Decimal ± 0.05
4. Dimension applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip.
5. Tiebar shown (if present) is a non-functional feature and maybe located on any of the 4 sides (or ends).
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Renesas Electronics:](#)

[ISL29102IROZ-T7](#)