


Micro Lead, 0.031 Jack to Jack

Individual lead for interconnecting SMD test clips to instrument Female...

Description

Individual lead for interconnecting Micro Clip Test Clips and MiniFlex Clips to instrument. 0.8mm (.031") female jack on both ends. Connect a MicroClip Test Clip to an oscilloscope tip.

- Highly flexible Silicone lead wire
- Material: Brass, Gold Plt.

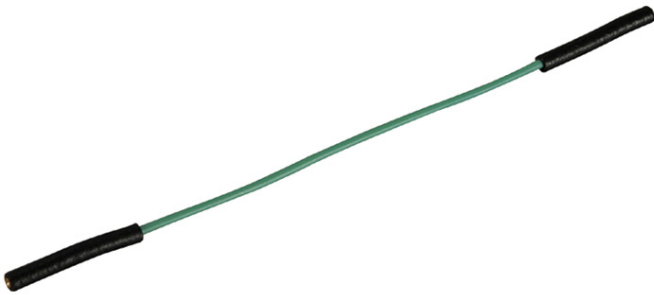

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25°C ± 5°C.

Specifications

IEC Rating	33 Vac / 70 Vdc
Current Max	2 A
Jacket Material	Silicone
Conductor Area	0.22 mm ²
Wire Gauge	24 AWG
Stranding	7 x 0.20 mm
OD	1.4mm (0.055")
Temperature (degrees)	-20 to +80C
RoHS (2011/65/EU)	Compliant

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cal Test Electronics:](#)

[CT2870-10-0](#) [CT2870-10-2](#)