
	·	Ŭ		-	
	THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.				REV. A CLASS A RELEASE
D	 NOTES: 1. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. 2. MATERIAL: BNC MALE CONNECTOR - 	BNC SHIELD BANAI CENTER CONDUCTOR SHELL COAX CABLE SCHEMATIC			
	 BODY & COULPING NUT: BRASS, NICKEL PLATED. DIELECTIC: PTFE CENTER CONTACT: BRASS, GOLD PLATED. MOLDED BOOT: PVC, BLACK. RG58C/U COAX CABLE - JACKET: PVC, BLACK; Ø4.95 O.D. DIELECTIC: PE CENTER CONDUCTOR: 22 AWG (19X34) TINNED 	<u>OOHLMATIO</u>			(2)
С	 COPPER, STRANDED. BREAKOUT: PVC, BLACK 4mm STACKING RETRACTABLE SLEEVE BANANA PLUGS - BODY: BRASS, NICKEL PLATED. INSULATOR (BODY): PP, COLOR SAME AS WIRE. TIP, PP, GREY. CONTACT: BECU, NICKEL PLATED 		13.4 [.53]		
	 3. ELECTRICAL: IMPEDANCE: ASSEMBLY: NON-CONSTANT BNC & RG58C/U: 50Ω VOLTAGE - 30 VRMS / 60 VDC (HANDHELD) 500 VRMS (HANDS FREE) DO NOT USE ON CIRCUITS SUBJECT TO TRANSIENT OVERVOLTAGES. CURRENT: 3 A MAX. 	LENGTH (cm) (71.3 [2.81]) ([.35])		2X 12 cm ±1 [4.7] MOLDED BREAK 3mm OD LEADS
В		(Ø 13.8) [.54]) BNC MALE WITH	RG58C/U		((2
	UKCA COMPLIANT.	MOLDED BOOT	CT4453-100 MODEL NUMBER		0 ±1.5 TOLERENCE (cm) MODEL NUMBE
A			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: XX = ±0.5 XX* = ±0.5* XXX = ±0.25 DO NOT SCALE DRAWING MATERIAL SEE NOTES TREATMENT	PROJECT NO. A660(b)	
			SEE NOTES		SCALE

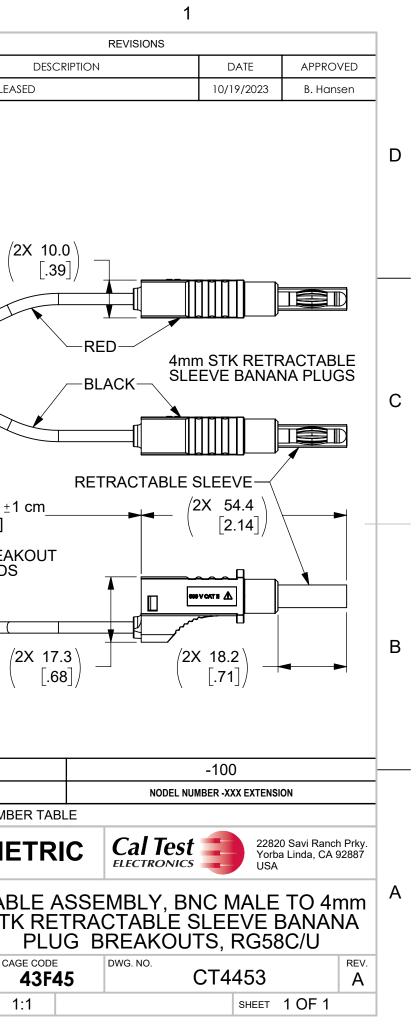

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cal Test Electronics:

CT4453-100