

RF_35/09.14/6.2 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG


Technical Data Sheet

Rosenberger

FAKRA
HF

STRAIGHT JACK

59K17F-1D8A4

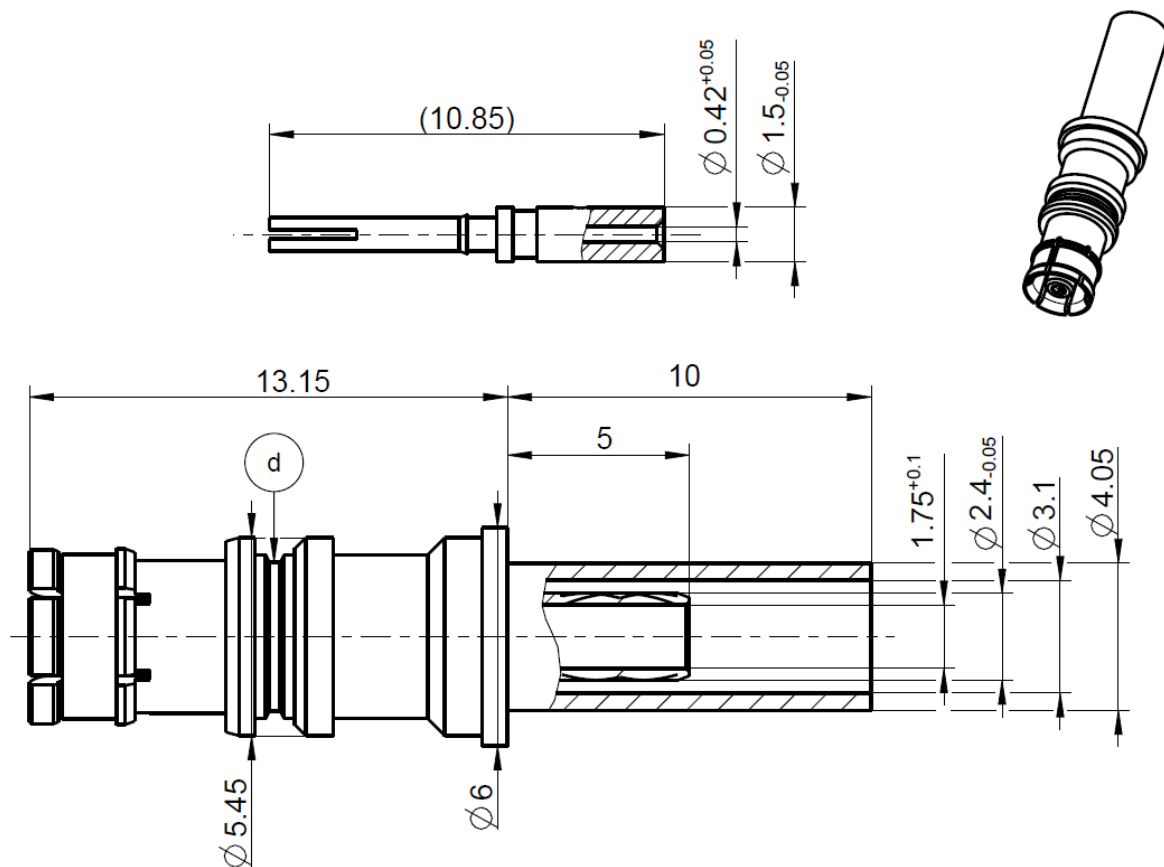

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

DIN 72594-1

Documents

Assembly instruction

MA_59V002

Material and plating

Connector parts

Center contact
Outer contact
Locking ring
Dielectric
Crimping sleeve

Material

Beryllium copper
Brass
Beryllium copper
PTFE
Copper

Plating

Gold, min. 0.8 µm, over nickel
Nickel, 3-6 µm
Nickel, 2.5-5 µm

Change History

Rev.	Date	Change
d00	16.09.20	identification groove added / change of norm clause for environmental data

Technical Data Sheet

Rosenberger

FAKRA
HF

STRAIGHT JACK

59K17F-1D8A4

Electrical data

Impedance	50 Ω *
Frequency	DC to 1 GHz
Return loss	≥ N/A
Insertion loss	≤ 0.1 x $\sqrt{f(\text{GHz})}$ dB
Insulation resistance	≥ 1x10 ³ MΩ
Center contact resistance	≤ 5 mΩ
Outer contact resistance	≤ 5 mΩ
Test voltage	750 V rms
Working voltage	335 V rms
Power current	≤ 1 A DC
RF-leakage	≥ 65 dB up to 1 GHz

- Limitations are possible due to the used cable type – * Interface only

Mechanical data

Mating cycles	≥ 25
Engagement force	≤ 25 N
Disengagement force	≥ 2 N

Environmental data

Temperature range	-40°C to +105°C
Thermal shock	DIN 72594-2 clause 8.2
Temperature and humidity	DIN 72594-2 clause 8.3
Vibration and mechanical shock	DIN 72594-2 clause 8.1
Dry heat	DIN 72594-2 clause 8.4
RoHS	compliant

- Limitations are possible due to the used cable type –

Tooling

Crimping tool	11W150-000
Crimp insert	11W15A-502

Suitable cables

B-75-1,7-2,7

Packing

Standard	1000 pcs in box, 4000 pcs in reusable container
Weight	1.81 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
J. Kinmayer	16.09.20	Danzl Florian	16.09.20	d00	19-1692	J. Kinmayer	16.09.20

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Page

2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[59K17F-1D8A4](#)