


# Technical Data Sheet

# Rosenberger

## Cable assembly

RPC-1.00 Jack – UT-047-LL – RPC-1.00 Jack

## L70-280-XXX

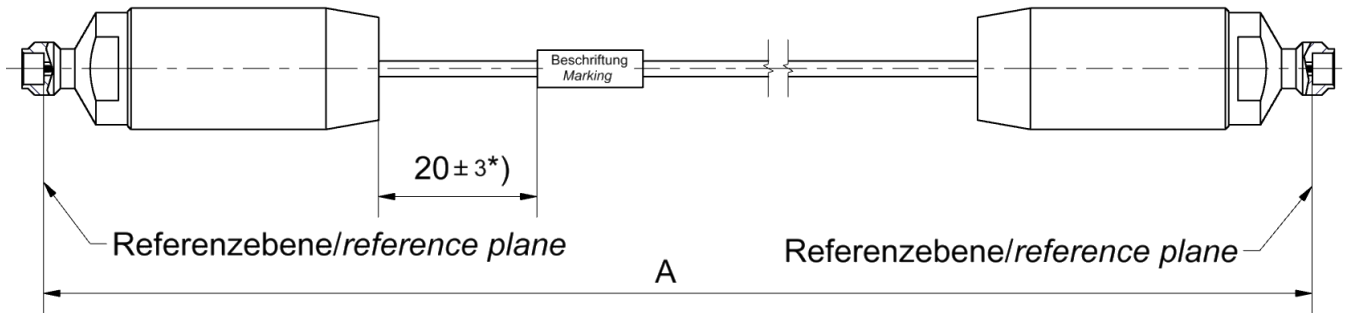

All dimensions are in mm; tolerances:  $\pm 3\text{mm}$  for  $A \leq 300\text{mm}$ ;  $\pm 1\%$  for  $A > 300\text{mm}$   
 \*) If length "A"  $\leq 90\text{mm}$  marking is mount centric  $\pm 5\text{mm}$

### Available variants

Type	max. Insertion loss	Marking	Weight (g) / pce
L70-280-XXX	$\leq 0.0017 * \sqrt{f[\text{GHz}]} \frac{\text{dB}}{\text{mm}}$	ROSENBERGER YYYYY-WW L70-280-XXX sssss	$0.0059 \frac{\text{g}}{\text{mm}} * A[\text{mm}] + 11.3\text{g}$

XXX – length in mm = A      Maximum possible length = 6000mm  
 WW – week      YYYYY – year      sssss – serial no.

Note:      Weight:  
 First constant = Cable weight per mm; Second Constant = Connector left and Connector right weight per pce

### Assembly parts

Connector left	RPC-1.00 jack
Connector right	RPC-1.00 jack
Cable	UT-047-LL
Armour	none

### Electrical data

Impedance	50 $\Omega$
Frequency	DC to 110 GHz
Return loss <sup>1</sup>	$\geq 17\text{ dB}$ , DC to 50 GHz $\geq 14\text{ dB}$ , 50 to 110 GHz
Insertion loss <sup>1</sup>	see table available variants

Individual testing and documentation:  
 Measurement plot with all 4 S – Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed.

<sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

### Mechanical data

Minimum bend radius:	
Single	20.0 mm

### Environmental data

Temperature range	- 40 °C to +125 °C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	10.06.15	Markus Müller	10.04.19	c00	19-0462	Marion Striegler	08.04.19

Rosenberger Hochfrequenztechnik GmbH & Co. KG  
 P.O.Box 1260 D-84526 Tittmoning Germany  
 www.rosenberger.de

Tel. : +49 8684 18-0  
 Email : info@rosenberger.de

Page  
 1 / 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[L70-280-140](#)