
Technical Data Sheet

Rosenberger

Cable assembly

RPC-1.00 Jack - UT-047-LL - RPC-1.00 Jack

L70-283-XXX

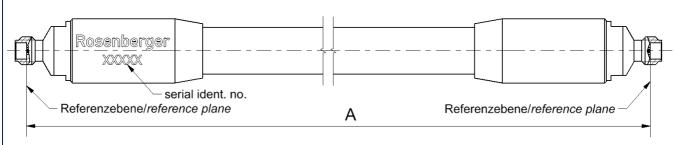

All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm

Available variants

Type	max. Insertion loss	Weight (g) / pce
L70-283-XXX	$\leq 0.0017 * \sqrt{f[GHz]} \frac{dB}{mm}$	$0.0710 \frac{g}{mm} * A[mm] + 8.6g$

XXX - length in mm = A

Maximum possible length = 6000mm

Note:

Weight:

First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left RPC-1.00 jack Connector right RPC-1.00 jack Cable UT-047-LL

Armour silicone rubber jacket over glass fiber braid / stainless steel spiral

Electrical data

Impedance 50Ω

Frequency DC to 110 GHz

Return loss¹ ≥ 17 dB, DC to 50 GHzc ≥ 14 dB, 50 to 110 GHz Insertion loss¹ see table available variants

Individual testing and documentation:

Measurement plot with all 4 S - Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed.

Mechanical data

Minimum bend radius:

Single 20.0 mm

Environmental data

- 40 °C to +125 °C Temperature range

RoHS compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Martin Moder	10.06.15	Markus Müller	08.04.19		c00	19-0462	Marion Striegler	08.04.19
Rosenberger Hochfrequenztechnik GmbH & Co. KG				10.0001.10.0		Page		

P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email: info@rosenberger.de

1/1

¹ Return Loss and Insertion Loss includes the measurement adaptor

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger: L70-283-140