


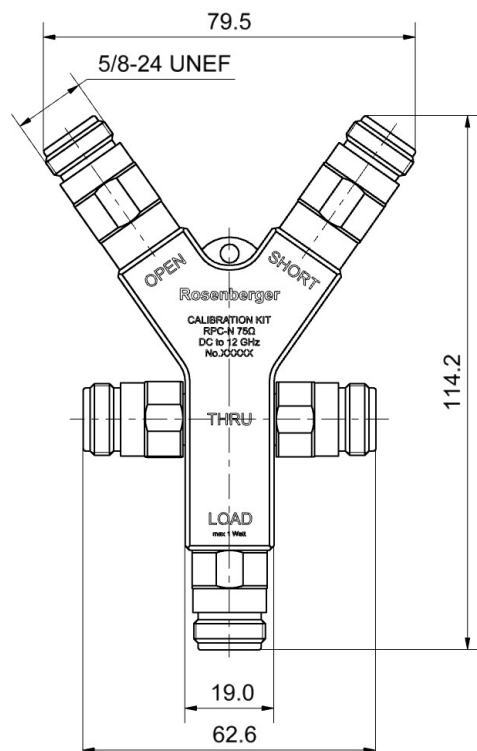

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-16

Contents and Documentation

This kit is delivered with

- **Standard Definitions Card**
Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- **Test Results Documentation**
- **Lanyard**
- **Hard Shell Case**
- **Protection Caps**

Material and plating

Connector parts

Center conductor
Outer conductor
Body
Dielectric
Substrate

Material

CuBe
Stainless steel
Aluminum
PS
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Passivated
black anodized

Electrical data

Frequency range DC to 12 GHz

Thru

Return loss
 ≥ 36 dB, DC to 4 GHz
 ≥ 27 dB, 4 GHz to 8 GHz
 ≥ 25 dB, 8 GHz to 12 GHz

Open

Error from nominal phase¹
 $\leq 3.0^\circ$, DC to 4 GHz
 $\leq 5.0^\circ$, 4 GHz to 8 GHz
 $\leq 6.0^\circ$, 8 GHz to 12 GHz

Short

Error from nominal phase²
 $\leq 2.5^\circ$, DC to 4 GHz
 $\leq 4.0^\circ$, 4 GHz to 8 GHz
 $\leq 5.0^\circ$, 8 GHz to 12 GHz

Load

Return loss
 ≥ 38 dB, DC to 4 GHz
 ≥ 32 dB, 4 GHz to 8 GHz
 ≥ 30 dB, 8 GHz to 12 GHz

DC-Resistance 75 Ω ± 0.75 Ω

Power handling (at 25 °C, sea level) ≤ 1.0 W, derate by 0.01 W/K

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance

Mechanical data

Mating cycles ≥ 500
 Maximum torque 1.70 Nm
 Recommended torque 1.10 Nm
 Gauge 5.18 mm to 5.26 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Thru

Offset Z₀ / Impedance / Z₀ 75 Ω
 Offset Delay 153.106 ps
 Length (electrical) / Offset Length 45.90 mm
 Offset Loss 1.20 GΩ/s
 Loss 0.0106 dB/√GHz
 Line Loss @ 1GHz 0.0002 dB/mm

Open

Offset Z₀ / Impedance / Z₀ 75 Ω
 Offset Delay 41.095 ps
 Length (electrical) / Offset Length 12.32 mm
 Offset Loss 1.20 GΩ/s
 Loss 0.0057 dB/√GHz
 Fringing Capacitances
 $C_0 = 8.50000 \times 10^{-15} \text{ F} / 8.50000 \text{ fF}$
 $C_1 = 9950.00 \times 10^{-27} \text{ F/Hz} / 9.95000 \text{ fF /GHz}$
 $C_2 = -2190.00 \times 10^{-36} \text{ F/Hz}^2 / -2.19000 \text{ fF /GHz}^2$
 $C_3 = 107.000 \times 10^{-45} \text{ F/Hz}^3 / 0.10700 \text{ fF /GHz}^3$

Technical Data Sheet

Rosenberger

RPC-N
75 Ω

Calibration Kit
Jack

P5K30R-MSOTS3

Short

Offset Z_o / Impedance / Z_o	75 Ω
Offset Delay	41.095 ps
Length (electrical) / Offset Length	12.32 mm
Offset Loss	1.20 G Ω /s
Loss	0.0057 dB/ $\sqrt{\text{GHz}}$
Short Inductance	$L_0 = -54.0000 \times 10^{-12} \text{ H} \quad / \quad -54.0000 \text{ pH}$
	$L_1 = 9950.00 \times 10^{-24} \text{ H/Hz} \quad / \quad 9.95000 \text{ pH/GHz}$
	$L_2 = 970.000 \times 10^{-33} \text{ H/Hz}^2 \quad / \quad 0.97000 \text{ pH/GHz}^2$
	$L_3 = -115.000 \times 10^{-42} \text{ H/Hz}^3 \quad / \quad -0.11500 \text{ pH/GHz}^3$

Load

Offset Z_o / Impedance / Z_o	50 Ω
Offset Delay	0.0000 ps
Length (electrical) / Offset Length	0.000 mm
Offset Loss	0.00 G Ω /s
Loss	0.0000 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range ³	+20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C
RoHS	compliant

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards. Model based standard definitions of the calibration standards are reported in Agilent / Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Inspection interval

Recommendation	12 months
----------------	-----------

Packing

Standard	1 pce in bag
Weight	255 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Marcel Panicke	14.01.16	Markus Müller	06.05.20	e00	19-2083	Marion Striegler	06.05.20

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Page

3 / 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[P5K30R-MSOTS3](#)