


HALO Electronics has developed this standard series of Isolation Modules to meet the return loss requirements of G.703 for T3, DS3, E3 and STS-1 applications. UL60950 and EN60950 recognized. Non-standard devices are also available. Please contact your local HALO Representative.




Mechanical Packages


SMD

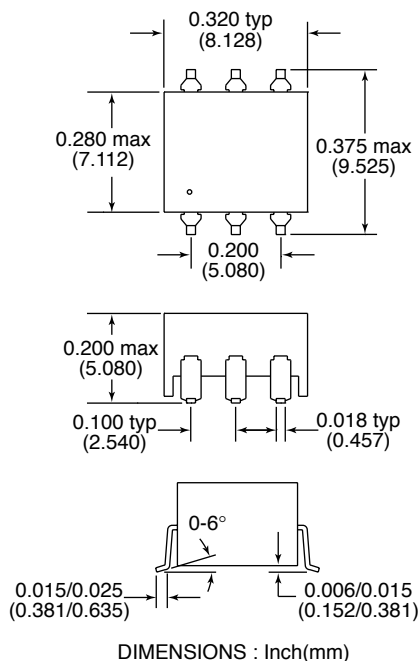


DIP

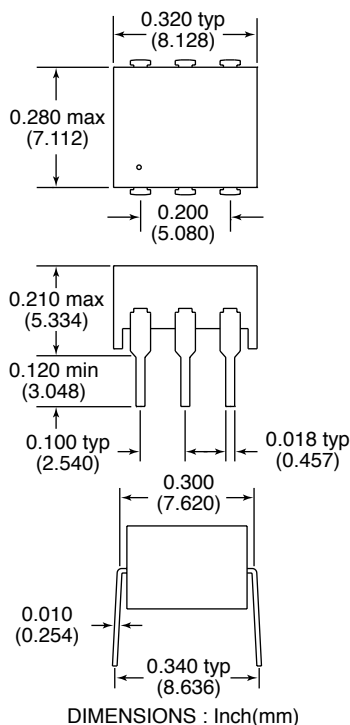


Schematic A



Schematic B



Schematic C



Patented Construction

US Pat Nbrs: 5,656,985 6,297,721 B1
6,297,720 B1 6,320,489 B1
6,344,785 B1 6,662,431 B1

Electrical Specifications @ 25°C

Isolation: 1,500 Vrms

Part Number		Schematic	Pri Pins	Turns Ratio $\pm 2\%$ PRI : SEC	PRI OCL (μH min)	LL (μH max)
SMD	DIP					
TG01-0406NSRL	TD01-0406NERL	A	1-3	1:1	40	0.10
TG04-0406NSRL	TD04-0406NERL	C	1-3	1CT:1CT	40	0.10
TG07-0206NSRL	TD07-0206NERL	B	1-3	1:2CT	19	0.06
TG23-0206NSRL	TD23-0206NERL	B	1-3	1:2.42CT	19	0.08
Extended Temp Range (-40C to +85C)						
TG01-0456NSRL	TD01-0456NERL	A	1-3	1:1	45	0.12
TG07-0356NSRL	TD07-0356NERL	B	1-3	1:2CT	35	0.12
TG23-0356NSRL	TD23-0356NERL	B	1-3	1:2.42CT	35	0.12

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HALO Electronics:](#)

[TD01-0456NERL](#) [TD07-0356NERL](#) [TD04-0406NERL](#) [TD23-0206NERL](#) [TD23-0356NERL](#)