

J Series® 2835B 3-V X Class LEDs



PRODUCT DESCRIPTION

J Series® LEDs extend Cree LED's industry-leading portfolio of lighting-class LEDs to a broader set of applications. The J Series 2835 LEDs combine high efficacy and excellent value in a reliable package. The J Series 2835 LEDs are optimized for low-density lighting applications where high efficacy and smooth appearance are critical, such as downlights, troffers, and panel lights.

FEATURES

- Industry-compatible size : 2.8 x 3.5 x 0.7 mm
- 3-V configuration
- Flux and chromaticity binned at 25 °C
- 6500 K–2700 K ANSI CCTs available
- 80 & 90 CRI minimum available for 6500 K–2700 K CCTs
- RoHS and REACH compliant

PRODUCT SUMMARY

| Product | Power Class | Test Temperature | Test Current | Typical Forward Voltage | 4000 K, 80 CRI | | Maximum Current |
|---------------------|-------------|------------------|--------------|-------------------------|----------------|------------------|-----------------|
| | | | | | Typical Flux | Typical Efficacy | |
| JB2835B 3-V X Class | 0.2 W | 25 °C | 60 mA | 3.14 V | 26.2 lm | 139 LPW | 120 mA |



J Series® Products are sold exclusively by Cree Venture LED Company Limited ("Cree Venture"), regardless of geography. Any orders for J Series Products that are submitted to Cree LED or any of its other subsidiaries will be directed to Cree Venture for acknowledgment and order fulfillment.


Cree LED / 4001 E. Hwy. 54, Suite 2000 / Durham, NC 27709 USA / +1.919.313.5330 / www.cree-led.com

TABLE OF CONTENTS

| | |
|---|----|
| Order Code & Bin Code Formats | 3 |
| Characteristics | 4 |
| Operating Limits | 4 |
| Flux Characteristics, Order Codes and Bins | 5 |
| Relative Luminous Flux vs. Current | 6 |
| Electrical Characteristics | 6 |
| Relative Chromaticity vs. Current | 7 |
| Relative Chromaticity vs. Junction Temperature | 7 |
| Relative Luminous Flux vs. Junction Temperature | 8 |
| Typical Spatial Distribution | 8 |
| Relative Spectral Power Distribution | 9 |
| Performance Groups - Luminous Flux | 10 |
| Performance Groups - Forward Voltage | 10 |
| Performance Groups - Chromaticity | 11 |
| Reflow Soldering Characteristics | 19 |
| Notes | 20 |
| Mechanical Dimensions | 22 |
| Tape & Reel | 23 |
| Packaging | 25 |

ORDER CODE & BIN CODE FORMATS

Order codes and bin codes for J Series 2835B LEDs are configured in the following manner:

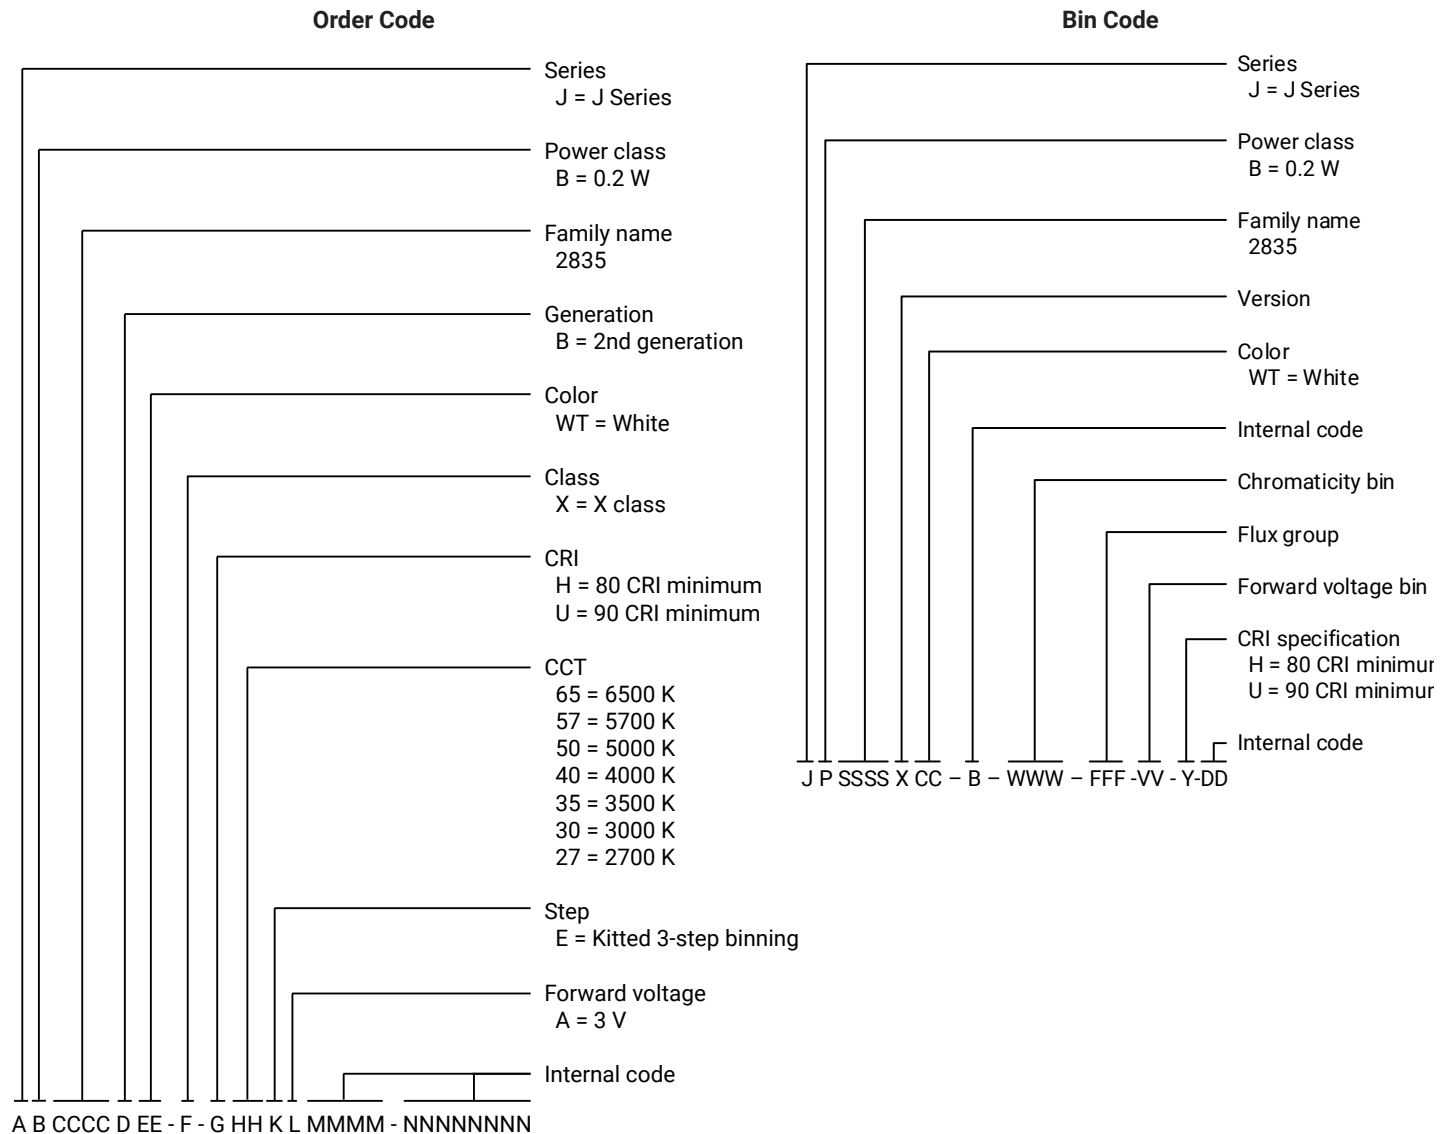


CHARACTERISTICS

| Characteristics | Unit | Minimum | Typical | Maximum |
|--|---------|---------|---------|---------|
| Thermal resistance, junction to solder point | °C/W | | 69 | |
| Viewing angle (FWHM) | degrees | | 120 | |
| Temperature coefficient of voltage | mV/°C | | -1.0 | |
| ESD withstand voltage (HBM per Mil-Std-883L) | | | Class 2 | |
| DC forward current | mA | | | 120 |
| Reverse voltage | V | | | 5 |
| Forward voltage (@ 60 mA, 25 °C) | V | | 3.14 | 3.3 |
| LED junction temperature | °C | | | 115 |
| Operating temperature | °C | -40 | | 85 |

- Continuous reverse voltage can cause LED damage.

OPERATING LIMITS

The maximum forward current is determined by the thermal resistance between the LED junction and ambient.

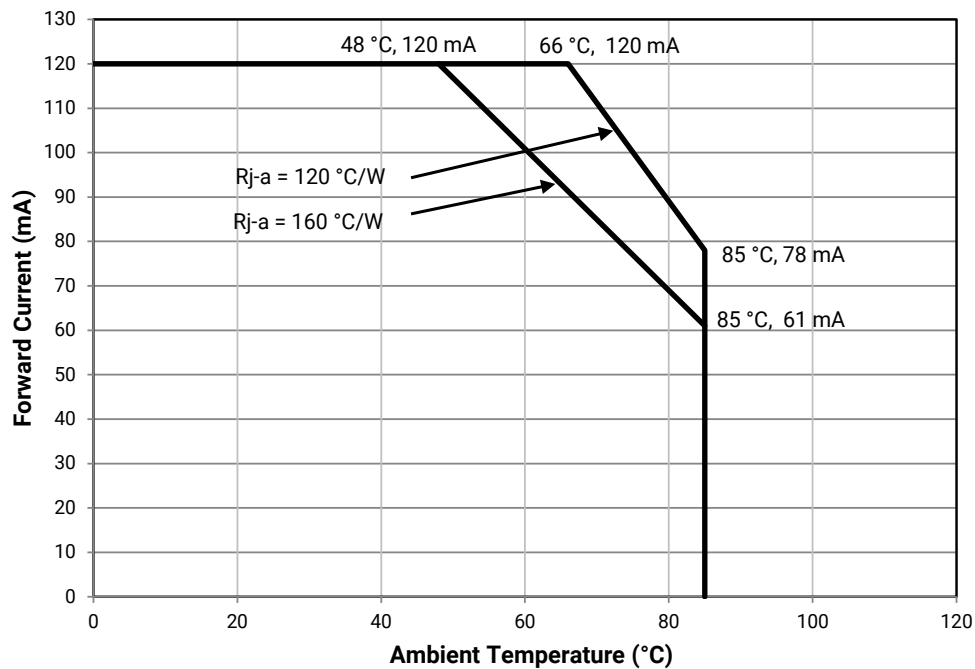

FLUX CHARACTERISTICS, ORDER CODES AND BINS ($I_F = 60 \text{ mA}$, $T_J = 25^\circ \text{C}$)

The following table provides order codes for J Series JB2835B 3-V X Class LEDs. For a complete description of the order code nomenclature, please see the Order Code and Bin Code Formats section (page 3). For definitions of the chromaticity kits, please see the Performance Groups - Chromaticity section (page 11).


| Nominal CCT | Minimum CRI | Minimum Flux (lm) @ 25 °C | Typical Flux (lm) @ 25 °C | Kitted 3-Step Order Code** |
|-------------|-------------|---------------------------|---------------------------|--------------------------------|
| 6500 K | 80 | 22 | 25.7 | JB2835BWT-X-H65EA0000-N0000001 |
| | 90 | 20 | 22.7 | JB2835BWT-X-U65EA0000-N0000001 |
| 5700 K | 80 | 24 | 26.2 | JB2835BWT-X-H57EA0000-N0000001 |
| | 90 | 20 | 22.7 | JB2835BWT-X-U57EA0000-N0000001 |
| 5000 K | 80 | 24 | 26.2 | JB2835BWT-X-H50EA0000-N0000001 |
| | 90 | 20 | 22.7 | JB2835BWT-X-U50EA0000-N0000001 |
| 4000 K | 80 | 24 | 26.2 | JB2835BWT-X-H40EA0000-N0000001 |
| | 90 | 20 | 22.7 | JB2835BWT-X-U40EA0000-N0000001 |
| 3500 K | 80 | 22 | 25.7 | JB2835BWT-X-H35EA0000-N0000001 |
| | 90 | 20 | 22.2 | JB2835BWT-X-U35EA0000-N0000001 |
| 3000 K | 80 | 22 | 25.2 | JB2835BWT-X-H30EA0000-N0000001 |
| | 90 | 18 | 21.7 | JB2835BWT-X-U30EA0000-N0000001 |
| 2700 K | 80 | 22 | 24.2 | JB2835BWT-X-H27EA0000-N0000001 |
| | 90 | 18 | 20.7 | JB2835BWT-X-U27EA0000-N0000001 |

Notes:


- Cree Venture maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and ± 2 on CRI measurements. See the Measurements section (page 20).
- Cree Venture J Series 2835B LED order codes specify only a minimum flux bin and not a maximum. Cree Venture may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity restrictions specified by the order code.

** Contact your Cree LED sales representative for kitted 3-step order code details.


RELATIVE LUMINOUS FLUX VS. CURRENT

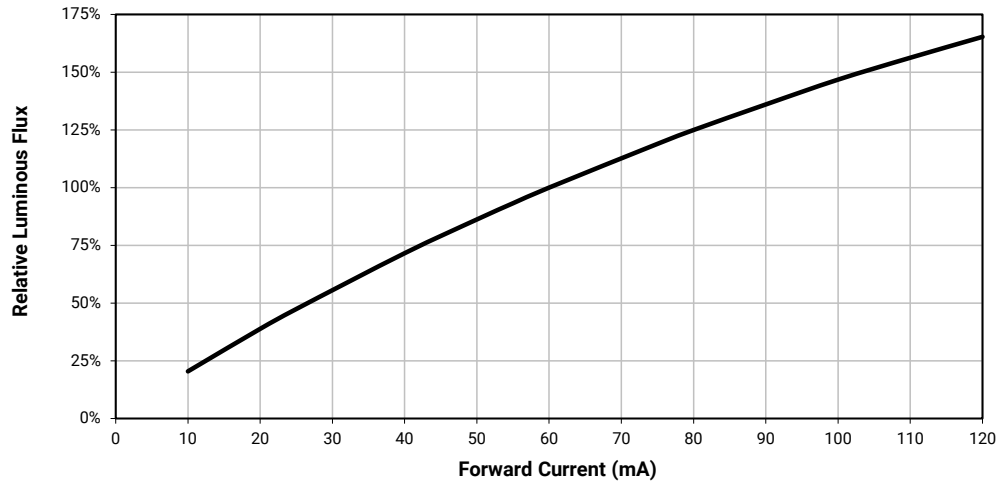


ELECTRICAL CHARACTERISTICS

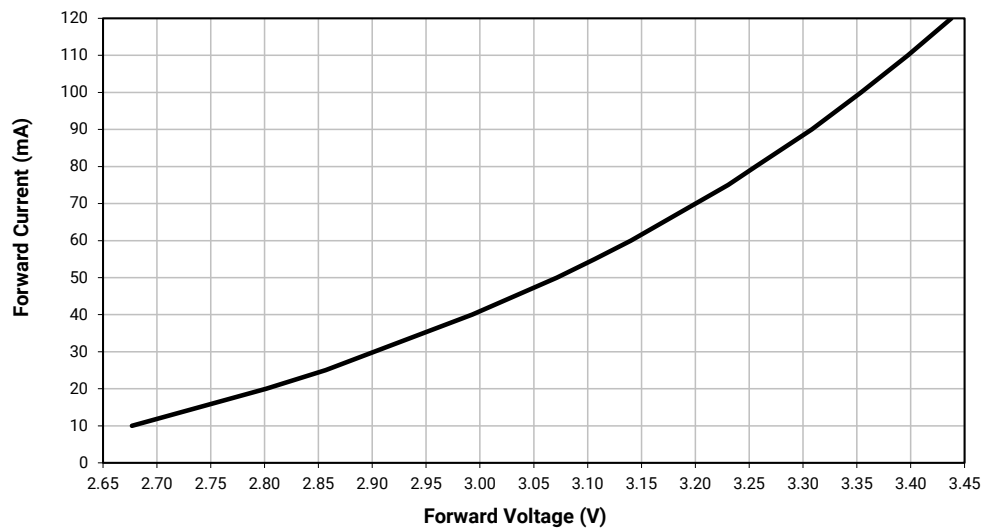


RELATIVE CHROMATICITY VS. CURRENT

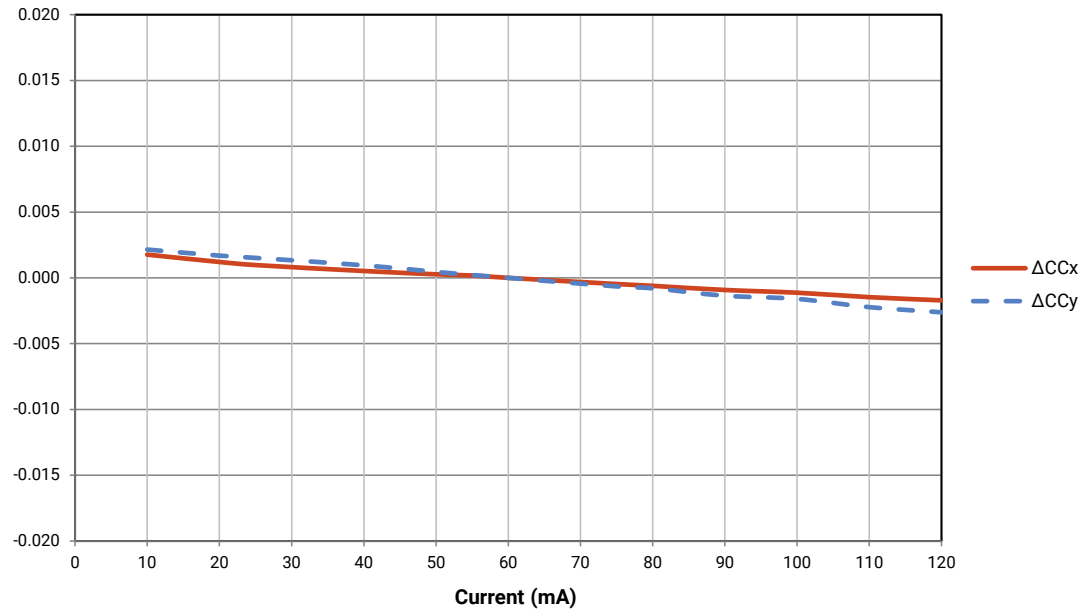


RELATIVE CHROMATICITY VS. JUNCTION TEMPERATURE

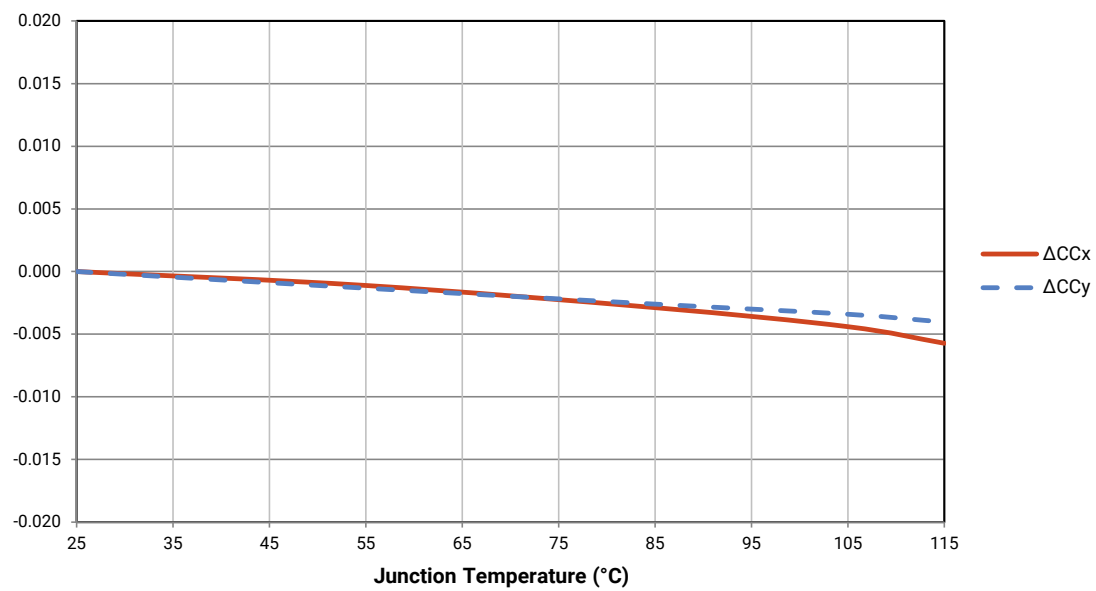



RELATIVE LUMINOUS FLUX VS. JUNCTION TEMPERATURE

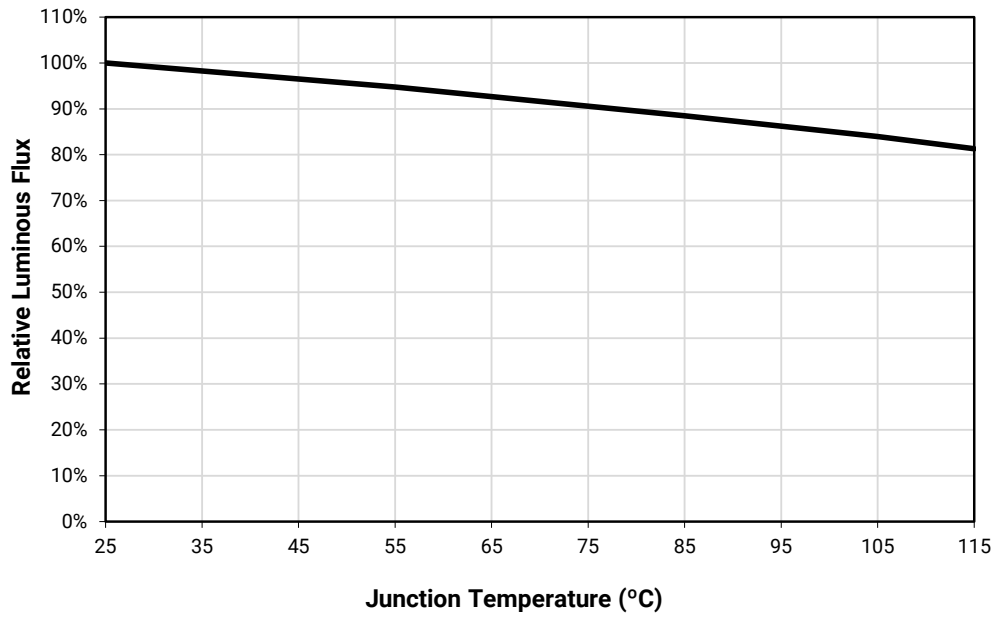

TYPICAL SPATIAL DISTRIBUTION

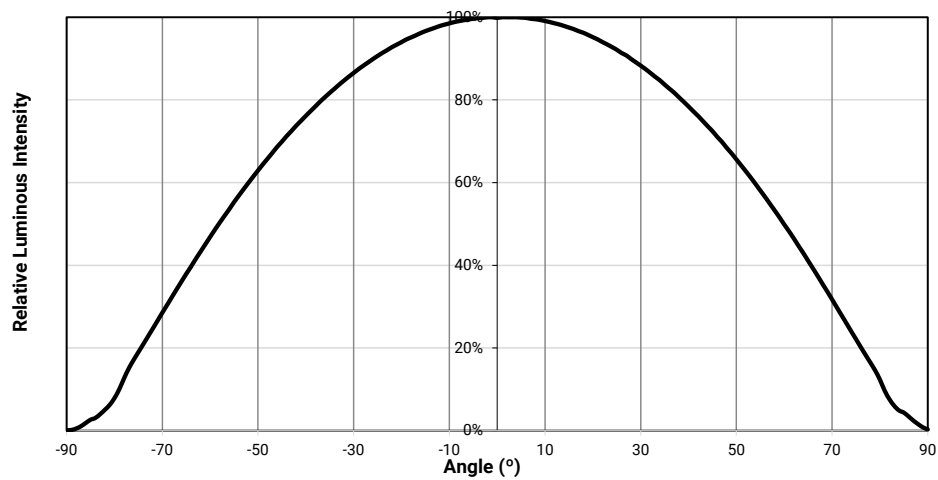

RELATIVE SPECTRAL POWER DISTRIBUTION

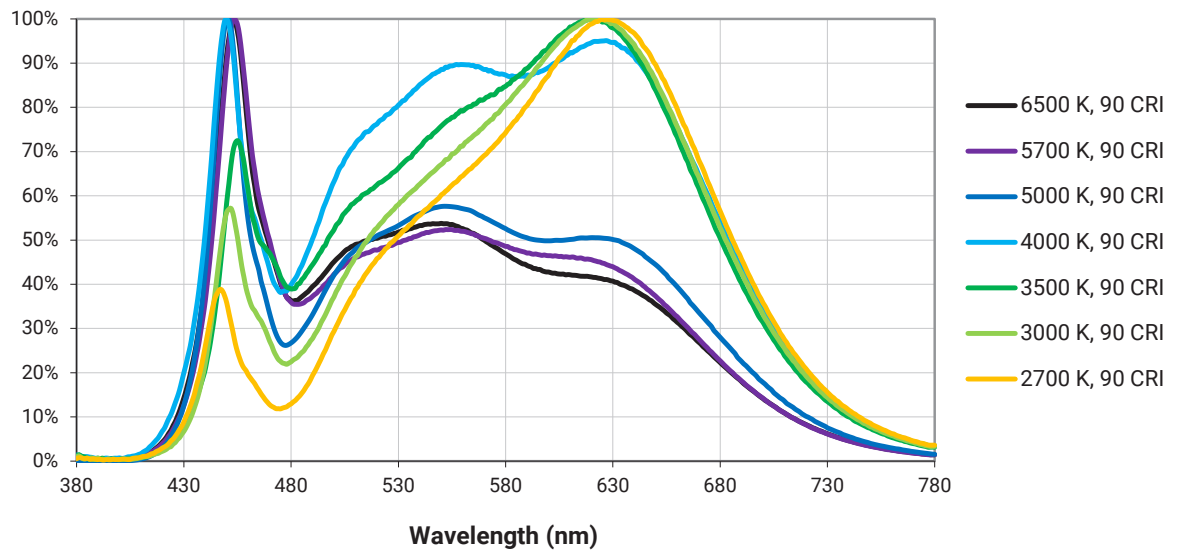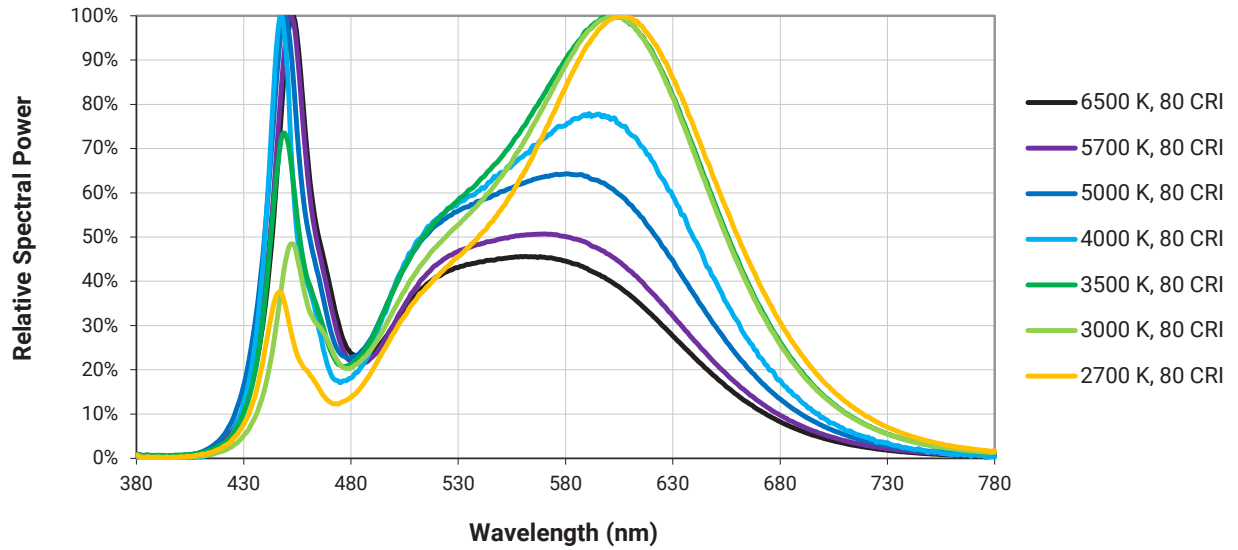

PERFORMANCE GROUPS - LUMINOUS FLUX ($T_j = 25\text{ }^{\circ}\text{C}$)

JB2835B 3-V X Class LEDs are tested for luminous flux at 60 mA and are placed into one of the following luminous-flux groups.

| Group Code | Minimum Luminous Flux (lm) | Maximum Luminous Flux (lm) |
|------------|----------------------------|----------------------------|
| B5 | 18 | 20 |
| C2 | 20 | 22 |
| C3 | 22 | 24 |
| C4 | 24 | 26 |
| C5 | 26 | 28 |
| D2 | 28 | 30 |

PERFORMANCE GROUPS - FORWARD VOLTAGE ($T_j = 25\text{ }^{\circ}\text{C}$)


J Series 2835B LEDs are tested for forward voltage and placed into one of the following voltage bins.


The following voltage bins are indicated in the Forward Voltage Bin field in the bin code for JB2835B 3-V X Class LEDs.

| Voltage Bin | Minimum Forward Voltage (V) | Maximum Forward Voltage (V) |
|-------------|-----------------------------|-----------------------------|
| AG | 3.0 | 3.1 |
| AH | 3.1 | 3.2 |
| AJ | 3.2 | 3.3 |


PERFORMANCE GROUPS - CHROMATICITY ($T_j = 25\text{ }^{\circ}\text{C}$)

J Series 2835B LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

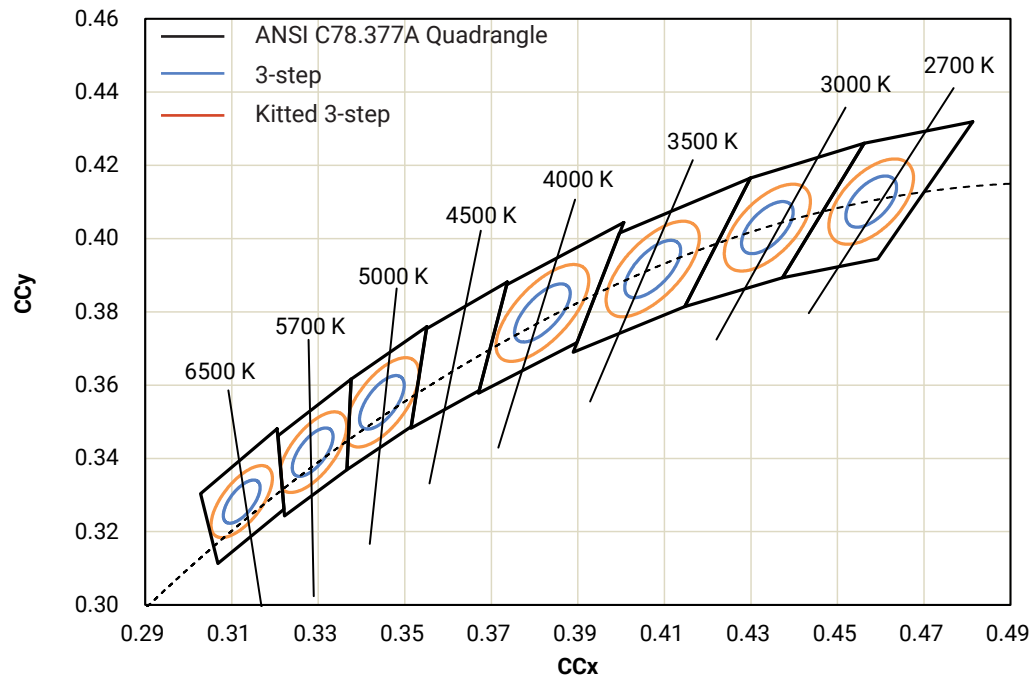


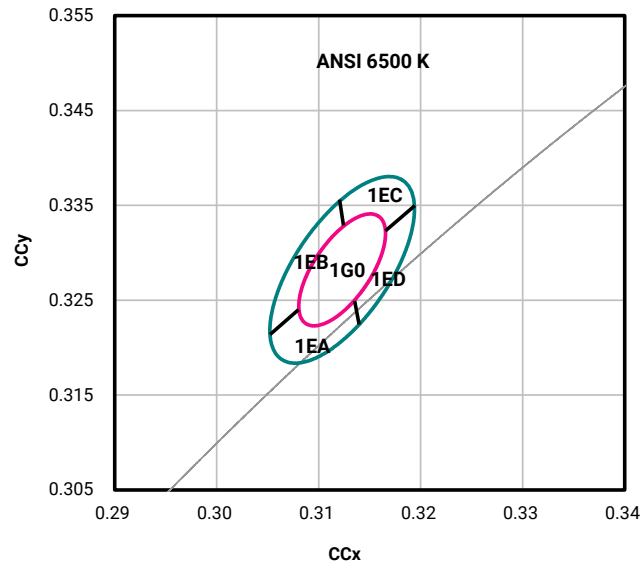PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)


| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|-------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 6500 K | 3-step | 1G0 | 0.3123 | 0.3282 | 0.00669 | 0.00285 | 58.57 |
| | Kitted 3-step | 1G0, 1EA, 1EB, 1EC, 1ED | 0.3123 | 0.3282 | 0.01115 | 0.00475 | 58.57 |

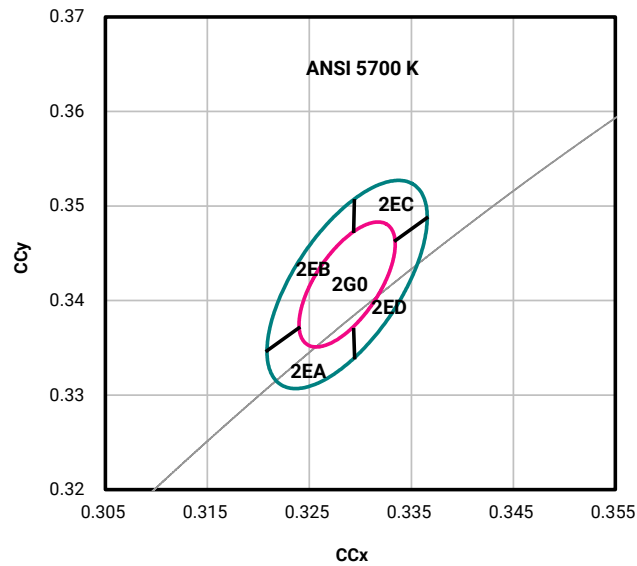PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)


| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|-------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 5700 K | 3-step | 2G0 | 0.3287 | 0.3417 | 0.00746 | 0.00320 | 59.09 |
| | Kitted 3-step | 2G0, 2EA, 2EB, 2EC, 2ED | 0.3287 | 0.3417 | 0.01243 | 0.00533 | 59.09 |

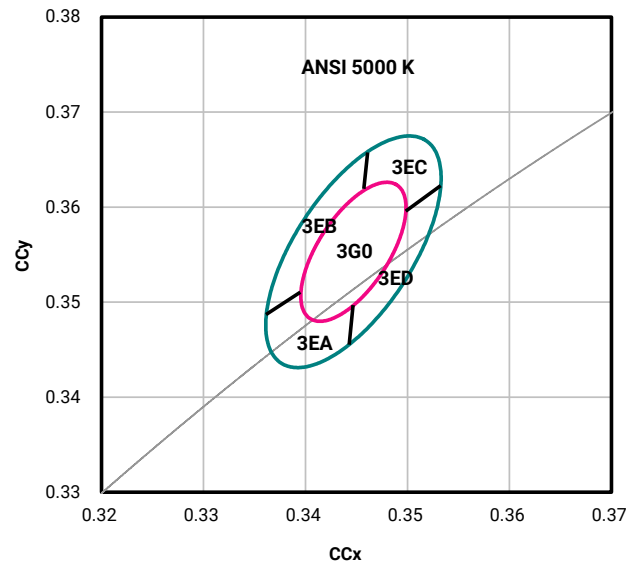PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)


| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|-------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 5000 K | 3-step | 3G0 | 0.3447 | 0.3553 | 0.00822 | 0.00354 | 59.62 |
| | Kitted 3-step | 3G0, 3EA, 3EB, 3EC, 3ED | 0.3447 | 0.3553 | 0.01370 | 0.00590 | 59.62 |

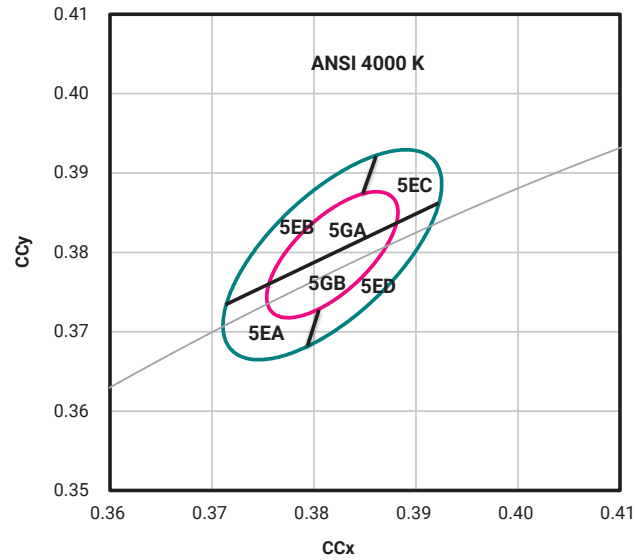PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)


| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|------------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 4000 K | 3-step | 5GA, 5GB | 0.3818 | 0.3797 | 0.00939 | 0.00402 | 53.72 |
| | Kitted 3-step | 5GA, 5GB, 5EA, 5EB, 5EC, 5ED | 0.3818 | 0.3797 | 0.01565 | 0.00670 | 53.72 |

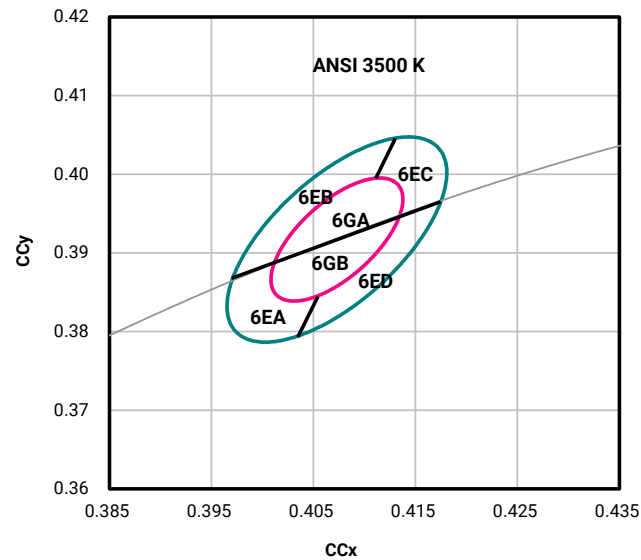PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)

| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 3500 K | 3-step | 6GA, 6GB | 0.4073 | 0.3917 | 0.00927 | 0.00414 | 54.00 |
| | Kitted 3-step | 6GA, 6GB, 6EA, 6EB, 6EC, 6ED | 0.4073 | 0.3917 | 0.01545 | 0.00690 | 54.00 |

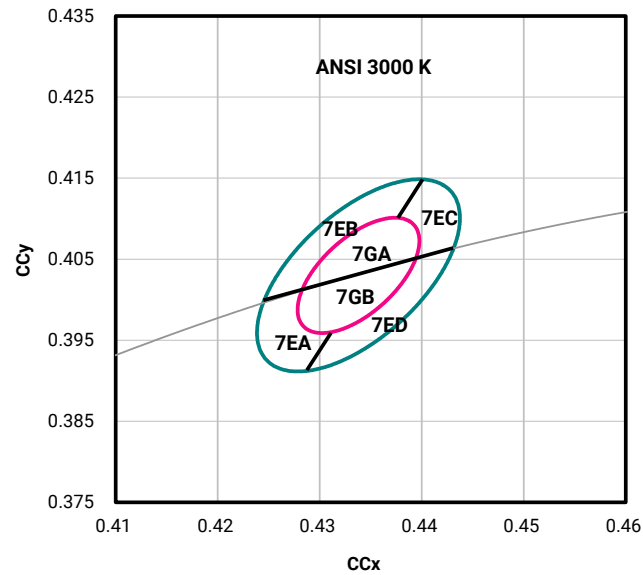PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)

| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|-----------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 3000 K | 3-step | 7GA, 7GB | 0.4338 | 0.4030 | 0.00834 | 0.00408 | 53.22 |
| | Kitted 3-step | 7GA, 7GB, 7EA, 7EB 7EC, 7ED | 0.4338 | 0.4030 | 0.01390 | 0.00680 | 53.22 |

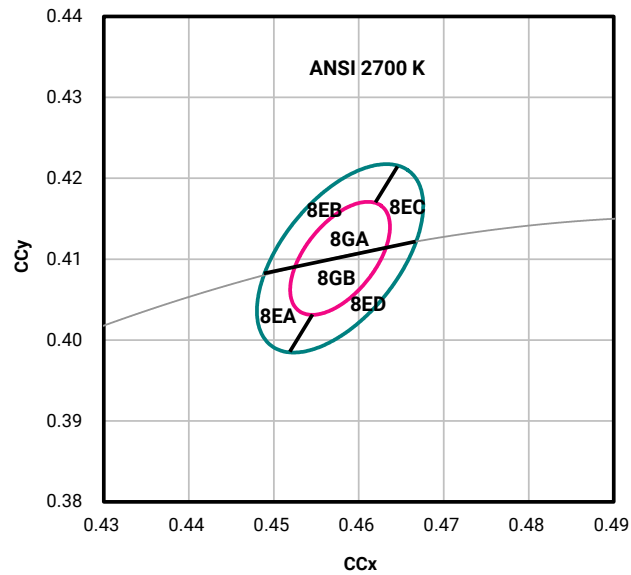
PERFORMANCE GROUPS - CHROMATICITY - CONTINUED ($T_j = 25\text{ }^{\circ}\text{C}$)

| CCT | MacAdam Ellipse | Included Bins | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
|--------|-----------------|------------------------------------|--------------|--------|------------|------------|--------------------|
| | | | x | y | a | b | |
| 2700 K | 3-step | 8GA, 8GB | 0.4578 | 0.4101 | 0.00810 | 0.00420 | 53.70 |
| | Kitted 3-step | 8GA, 8GB, 8EA, 8EB, 8EC, 8ED | 0.4578 | 0.4101 | 0.01350 | 0.00700 | 53.70 |

REFLOW SOLDERING CHARACTERISTICS

In testing, Cree Venture has found J Series 2835B LEDs to be compatible with JEDEC J-STD-020C, using the parameters listed below. As a general guideline, Cree Venture recommends that users follow the recommended soldering profile provided by the manufacturer of the solder paste used, and therefore it is the lamp or luminaire manufacturer's responsibility to determine applicable soldering requirements.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

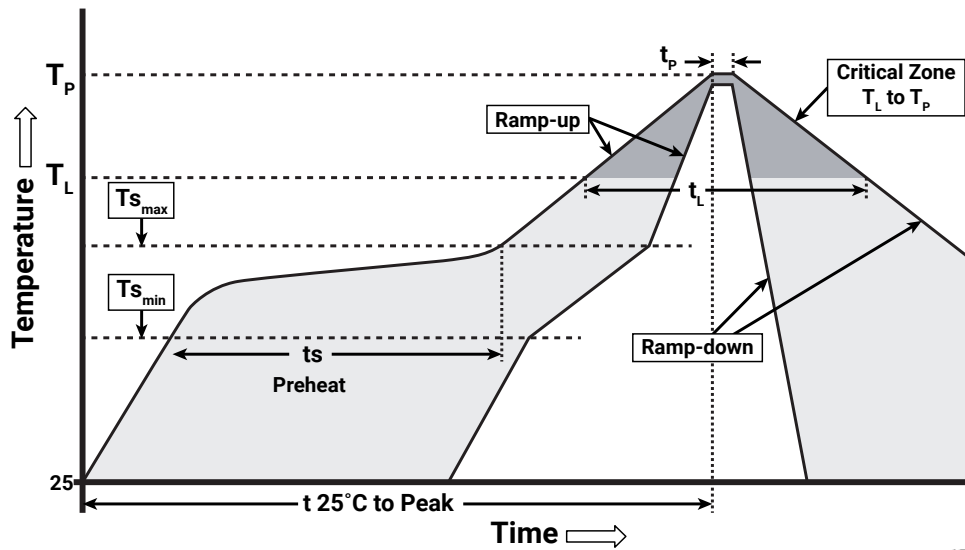

IPC/JEDEC J-STD-020C

| Profile Feature | Lead-Free Solder |
|--|------------------|
| Temperature Min. ($T_{s_{min}}$) | 150 °C |
| Temperature Max. ($T_{s_{max}}$) | 200 °C |
| Time (ts) from $T_{s_{min}}$ to $T_{s_{max}}$ | 60-120 seconds |
| Ramp-Up Rate (T_L to T_p) | 3 °C/second |
| Liquidus Temperature (T_L) | 217 °C |
| Time (t_L) Maintained Above T_L | 60-150 seconds |
| Peak Package Body Temperature (T_p) | 260 °C max. |
| Time (t_p) Within 5 °C of the Specified Classification Temperature (T_c) | 30 seconds max. |
| Ramp-Down Rate (T_p to T_L) | 6 °C/second max. |
| Time 25 °C to Peak Temperature | 8 minutes max. |

Note: All temperatures refer to the topside of the package, measured on the package body surface.

NOTES

Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree Venture's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

Lumen Maintenance

Cree Venture uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [J Series LM-80 results document](#).

Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

Moisture Sensitivity

Cree Venture recommends keeping J Series 2835B LEDs in the provided, resealable moisture-barrier packaging (MBP) until immediately prior to soldering. Unopened MBP that contains J Series 2835B LEDs does not need special storage for moisture sensitivity.

Once the MBP is opened, J Series 2835B LEDs should be handled and stored as MSL 3 per JEDEC J-STD-033, meaning they have limited exposure time before damage to the LED may occur during the soldering operation. The table on the right specifies the maximum exposure time in days depending on temperature and humidity conditions. LEDs with exposure time longer than the specified maximums must be baked according to the baking conditions listed below.

| Moisture Sensitivity Level | Temp. | Maximum Percent Relative Humidity | | | | |
|----------------------------|-------|-----------------------------------|-----|-----|-----|-----|
| | | 50% | 60% | 70% | 80% | 90% |
| Level 3 | 35 °C | 8 | 5 | 1 | 0.5 | 0.5 |
| Level 3 | 30 °C | 11 | 7 | 1 | 1 | 1 |
| Level 3 | 25 °C | 14 | 10 | 2 | 1 | 1 |
| Level 3 | 20 °C | 20 | 13 | 2 | 1 | 1 |

Baking Conditions

It is not necessary to bake all J Series 2835B LEDs. Only the LEDs that meet all of the following criteria must be baked:

1. LEDs that have been removed from the original MBP.
2. LEDs that have been exposed to a humid environment longer than listed in the Moisture Sensitivity section above.
3. LEDs that have not been soldered.

LEDs should be baked at 60 °C for 24 hours. LEDs may be baked in the original reels. Remove LEDs from the MBP before baking. Do not bake parts at temperatures higher than 60 °C. This baking operation resets the exposure time as defined in the Moisture Sensitivity section above.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as

NOTES - CONTINUED

implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree Venture representative or from the [Product Ecology](#) section of the Cree LED website.

REACH Compliance

REACH substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree Venture representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.


Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [J Series LED Eye Safety application note](#).

MECHANICAL DIMENSIONS

Vias, if present, are not shown on these drawings.


All measurements are ± 0.1 mm unless otherwise indicated.

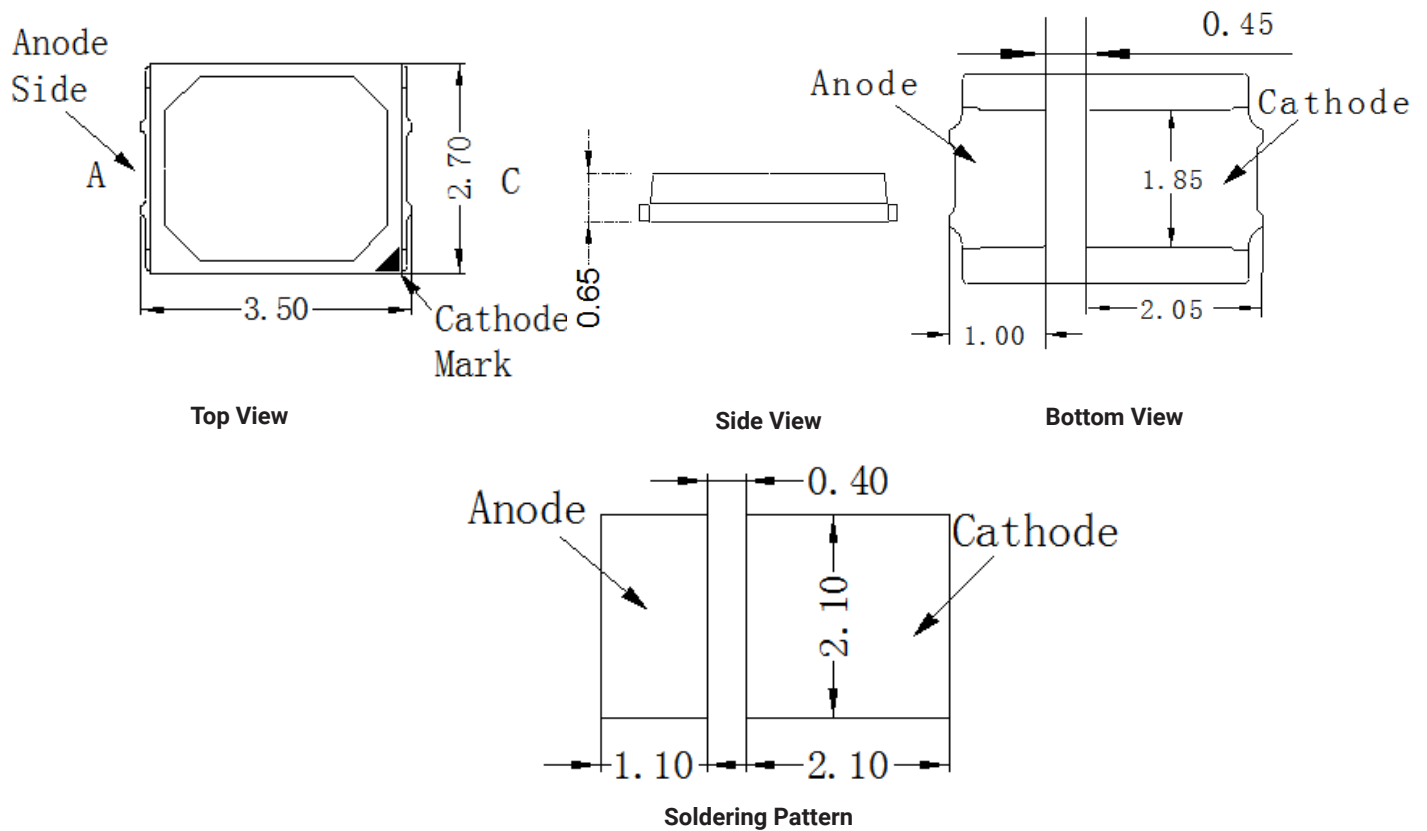


TAPE & REEL

All Cree Venture carrier tapes conform to EIA-481D, Automated Component Handling Systems Standard.

All dimensions in mm.

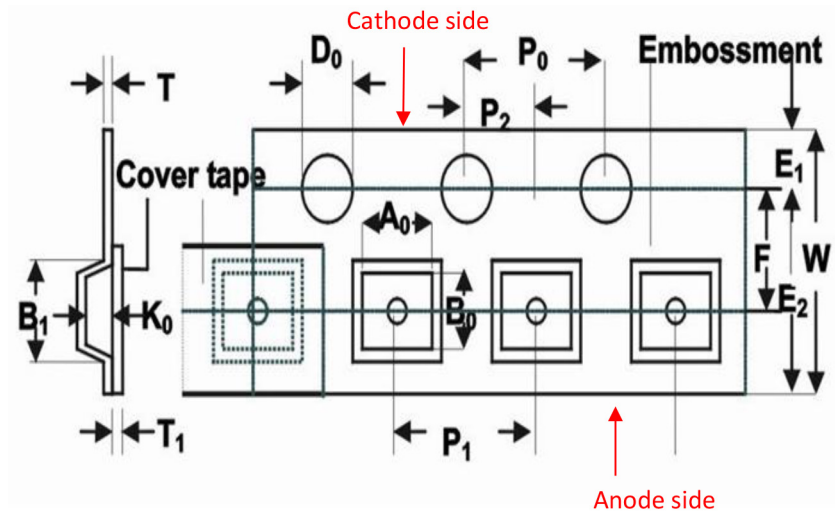


| Symbol | Specification | Symbol | Specification |
|--------|---------------|--------|---------------|
| W | 8.00 ± 0.10 | Ao | 3.00 ± 0.10 |
| E | 1.75 ± 0.10 | Bo | 3.75 ± 0.10 |
| F | 3.50 ± 0.05 | Ko | 1.05 ± 0.10 |
| Do | 1.60 ± 0.05 | | |
| Po | 4.00 ± 0.10 | | |
| P1 | 4.00 ± 0.10 | | |
| P2 | 2.00 ± 0.05 | | |
| T | 0.18 ± 0.05 | | |
| T1 | 0.05 | | |

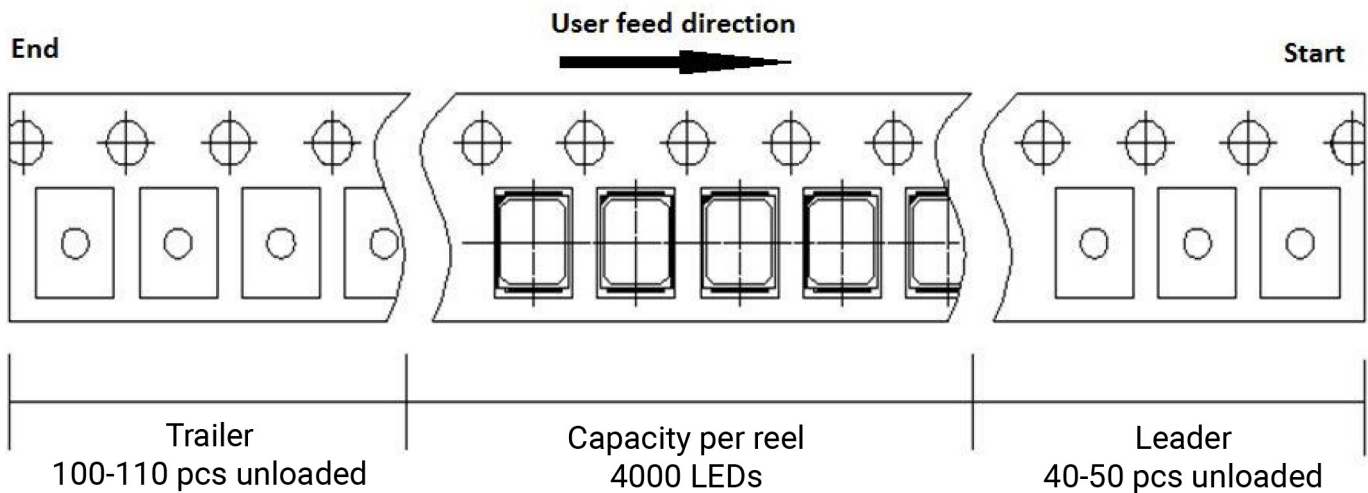


TAPE & REEL- CONTINUED

| A±1 | B+2/-1 | C±0.5 | D±0.3 | E±0.3 | F±0.2 | T1±0.2 |
|-------|--------|-------|-------|-------|-------|--------|
| 177.8 | 9.3 | 58.5 | 11.4 | 2.7 | 13.5 | 0.9 |

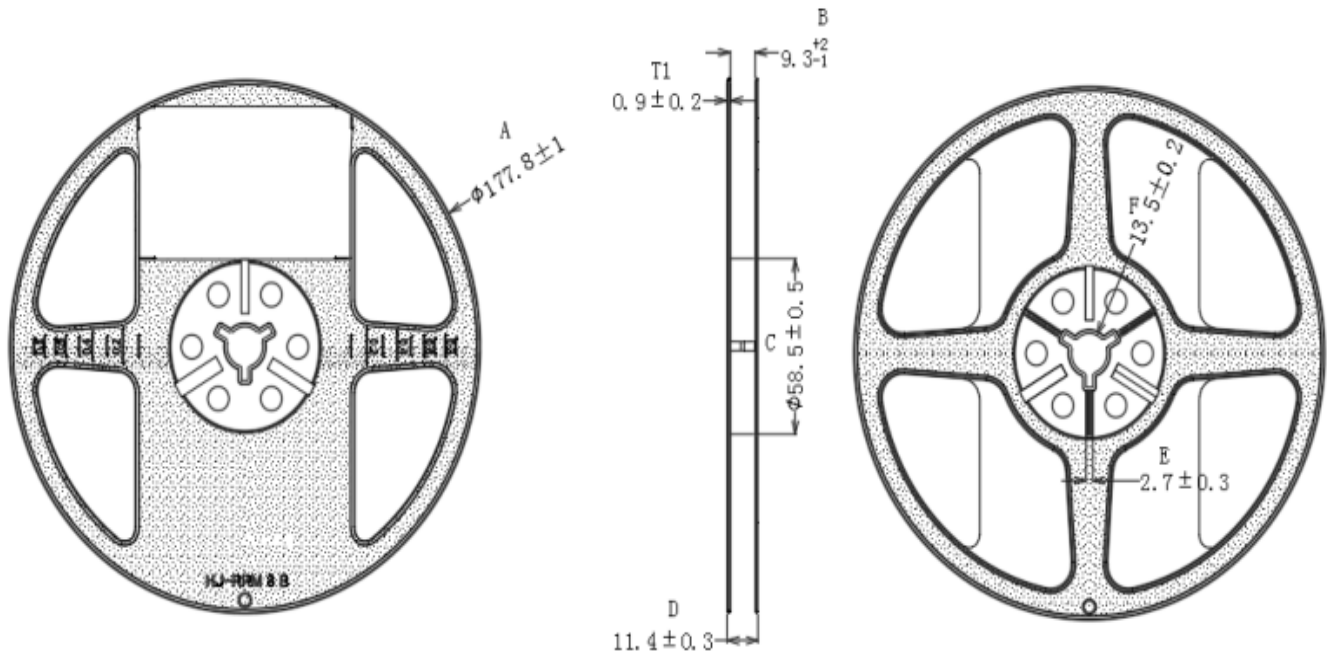


PACKAGING

Unpackaged Reel

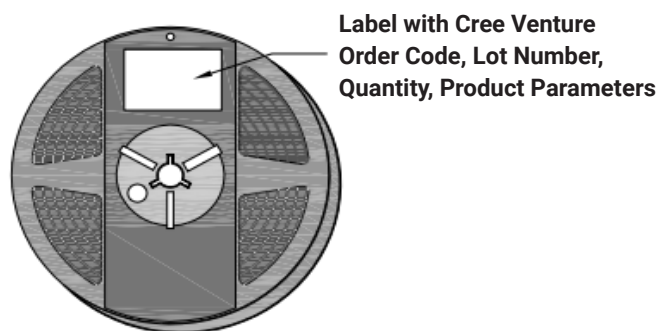

Packaged Reel

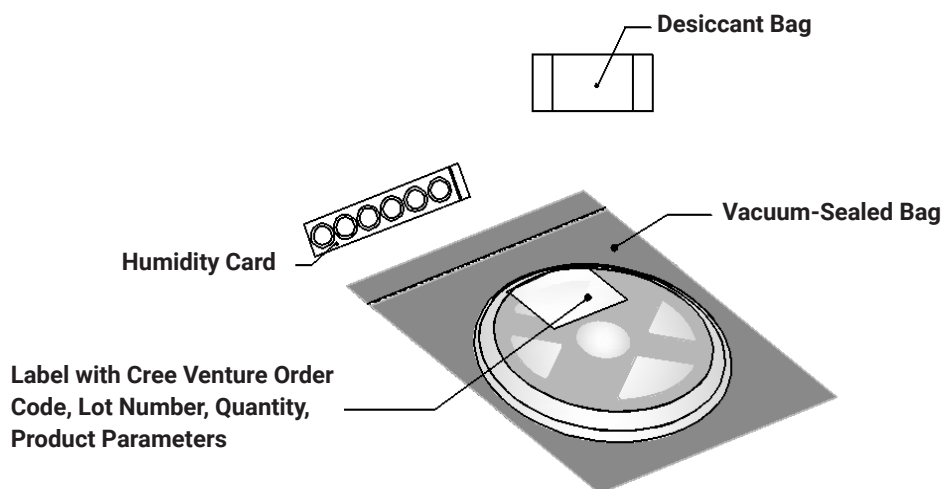


PACKAGING - CONTINUED

J Series 2835B LEDs are packaged in boxes for shipment. Box sizes and the number of reels per box are as follows.


| Box | Box Dimensions | Maximum Number of Reels per Box |
|-----|--------------------|---------------------------------|
| 1 | 250 x 210 x 30 mm | 2 |
| 2 | 250 x 210 x 50 mm | 4 |
| 3 | 530 x 230 x 275 mm | 42 |
| 4 | 530 x 443 x 275 mm | 84 |

Each box has at least one label (shown as a white square in the diagrams below) showing the order code, lot number, quantity, and product parameters.


Box 1

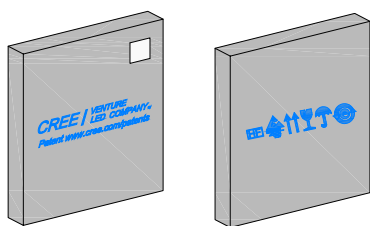


Box 2

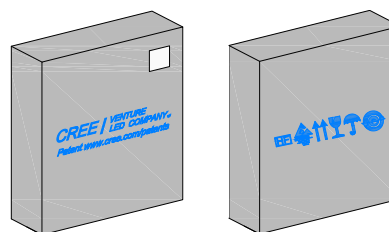

Box 3

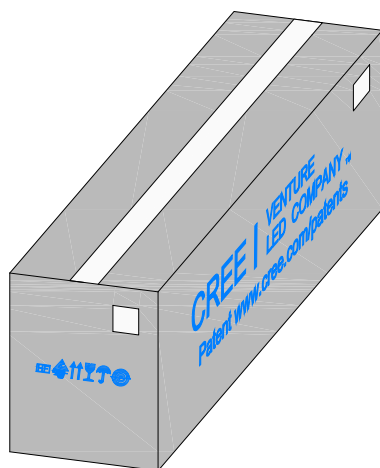

Box 4

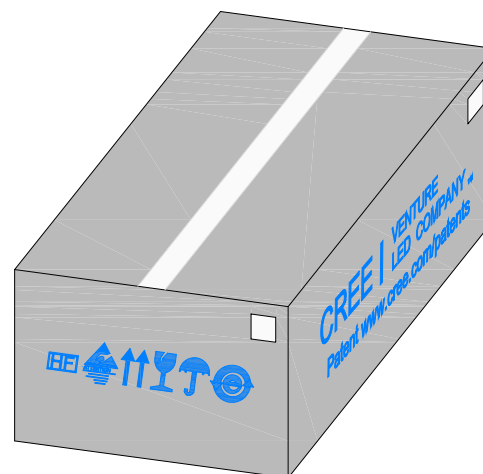

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cree LED:

| | | |
|---|---|---|
| <u>JB2835BWT-X-U65EA0000-N0000001</u> | <u>JB2835BWT-X-H65EA0000-N0000001</u> | <u>JB2835BWT-X-H50EA0000-N0000001</u> |
| <u>JB2835BWT-X-H35EA0000-N0000001</u> | <u>JB2835BWT-X-H57EA0000-N0000001</u> | <u>JB2835BWT-X-H27EA0000-N0000001</u> |
| <u>JB2835BWT-X-H40EA0000-N0000001</u> | <u>JB2835BWT-X-U50EA0000-N0000001</u> | <u>JB2835BWT-X-U30EA0000-N0000001</u> |
| <u>JB2835BWT-X-U27EA0000-N0000001</u> | <u>JB2835BWT-X-H30EA0000-N0000001</u> | <u>JB2835BWT-X-U35EA0000-N0000001</u> |
| <u>JB2835BWT-X-U40EA0000-N0000001</u> | <u>JB2835BWT-X-U57EA0000-N0000001</u> | |