



## SMA Jack End Connector – 1.0mm to 1.6mm

### Gold Plated SMA Jack End Connector




#### Product Overview

An RF coaxial connector designed for efficient mounting a printed circuit board. It features a SMA edge mount end launcher, gold plated brass body with gold contacts. An impedance of 50  $\Omega$  and is RoHS compliant.

The standard 3 options available cater for PCB thicknesses 1.0mm, 1.22mm and 1.6mm, although bespoke options can be considered also.

Item		Specifications
Mechanical	Termination Style	PCB
	Frequency	DC to 6GHz
	Nominal Impedance	50 $\Omega$
	Weight	8g
	Material	Brass
	Finish	Gold

## Product specification

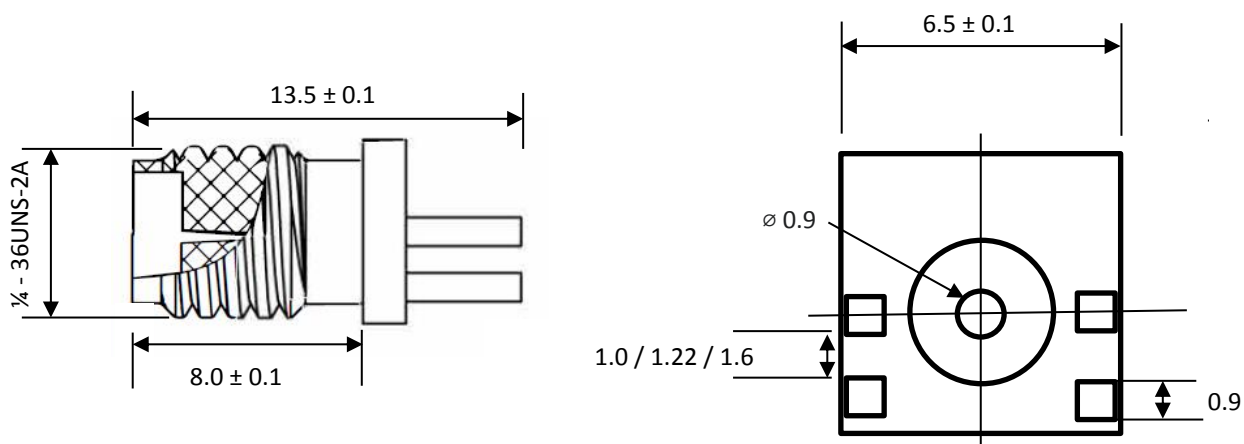

Dimensions in mm:

## Product Order Code

Name	Description	Order Code
SMAENDBLKHD-JK	SMA Jack End female coaxial connector 1.0mm	SMAENDBLKHD-JK-1.0
SMAENDBLKHD-JK	SMA Jack End female coaxial connector 1.22mm	SMAENDBLKHD-JK-1.22
SMAENDBLKHD-JK	SMA Jack End female coaxial connector 1.6mm	SMAENDBLKHD-JK-1.6

## Accessories / Alternatives

Description	Order code
PCB mount SMA jack	SMACONNECTOR
PCB mount Right-angled SMA Jack	SMARACONNECTOR



**Low Power Radio Solutions Ltd**  
 Two Rivers industrial Estate  
 Station Lane, Witney OX28 4BH, UK  
 +44(0) 1993 709418  
 sales@lprs.co.uk

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LPRS:](#)

[SMAENDBLKHD-JK-1.0](#) [SMAENDBLKHD-JK-1.22](#) [SMAENDBLKHD-JK-1.6](#)