



CFM41S SERIES


40 WATT SINGLE OUTPUT

AC-DC OPEN FRAME



Features

- * Universal Input 90~264VAC
- * EN55032 Class B and CISPR/FCC Class B
- * IEC/EN/UL62368-1
- * Meets IEC/EN60335-1
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * No Load Power Consumption < 0.15W
- * Peak Load (2 times of rated current)
- * Class II

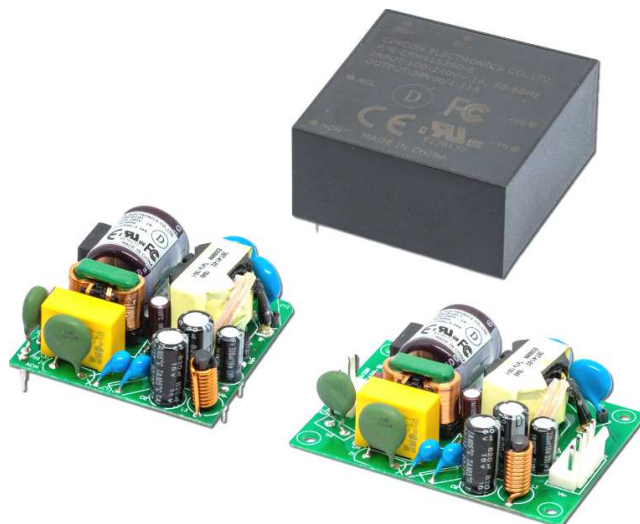

Ordering information

CFM41SXXX- X
 Blank: PCB mount
 E: Encapsulated
 T: WAFER

MODEL	Output Voltage	Output Current	PEAK Current NOTE6	Ripple (mV p-p) NOTE1	Voltage Accuracy NOTE2	Line Regulation NOTE3	Load Regulation NOTE4	% EFF. (typ.) NOTE5
CFM41S050	5 V	6 A	12 A	100mV	±2%	±0.5%	±1%	87%
CFM41S120	12 V	3.34 A	6.66 A	120mV	±1%	±0.5%	±1%	90%
CFM41S150	15 V	2.67 A	5.34 A	150mV	±1%	±0.5%	±1%	90%
CFM41S240	24 V	1.67 A	3.34 A	240mV	±1%	±0.5%	±1%	90%
CFM41S360	36 V	1.11 A	2.22 A	360mV	±1%	±0.5%	±1%	90%
CFM41S480	48 V	0.83 A	1.66 A	480mV	±1%	±0.5%	±1%	90%

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

Specifications

INPUT SPECIFICATIONS:

Voltage	90~264Vac 120~370Vdc
Frequency	47 to 63Hz
Inrush Current	70A max. @240Vac, Cold Start @25°C
Leakage Current	0.25mA max. @ 264Vac
Input Current	100Vac/1A max., 240Vac/0.55A max.

OUTPUT SPECIFICATIONS:

Holdup Time	10ms typ. @115Vac
Short Circuit Protection	Hiccup Mode (Auto Recovery)
Temperature Coefficient	±0.05%/°C
Over Voltage Protection	TVS Component to Clamp
Startup time	115Vac<2s typ. 230Vac<1s typ.
Switching Frequency	65KHz Typical

GENERAL SPECIFICATIONS:


Isolation Voltage(Input to Output)	3000VAC
Operating Temperature	-40~85°C (See Derating Curve)
Storage Temperature	-40°C~85°C
Cooling	Natural Convection
Humidity	93%RH max. Non condensing
MTBF	MIL-HDBK-217F, GB, 25°C/115VAC 350Khrs min
Life time	26000 hours min.@ 75% Load, 40°C
Altitude	5000m
Dimensions	2.000x2.000x1.01 inches (50.80x50.80x25.6 mm) -E: 2.14x2.14x1.043 inches (54.37x54.37x26.5 mm) -T: 2.70x2.00x0.941 inches (68.58x50.80x23.9 mm)
Weight	61g, 142g(-E), 64g(-T)

SAFETY AND EMISSION:


Emission and Immunity	EN55032 Class B, FCC Part 15 Class B EN61000-3-2, EN61000-3-3, EN61000-6-1, EN61000-6-2 EN61000-6-3, EN61000-6-4, EN55024, EN61204-3
Safety	Class II, IEC/EN/UL62368-1

CFM41S Series De-rating Curve

CFM41SXXX、CFM41SXXX-E

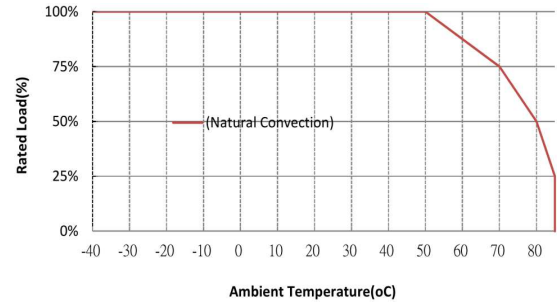


CFM41SXXX-T

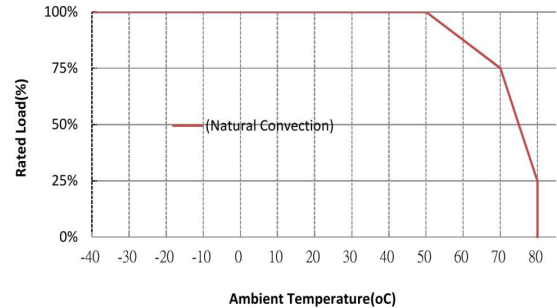

NOTE:


1. Voltage accuracy is set of 100% rated load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measuring @20MHz BW.
3. Line regulation is measured from high line to low line with full load
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230VAC and full load at 25°C
6. PL(peak load function) Lasting time < 10 seconds with a maximum 10% duty cycle and must add external 68uF / 400V capacitor to BC+ & BC-.
7. CFM41SXXX-T input and output connectors (CN1 and CN2) wafer with TAIWAN KING PIN TERMINAL PVHI series and mate with JST housing VHR series or equivalent.

Mechanical Specification

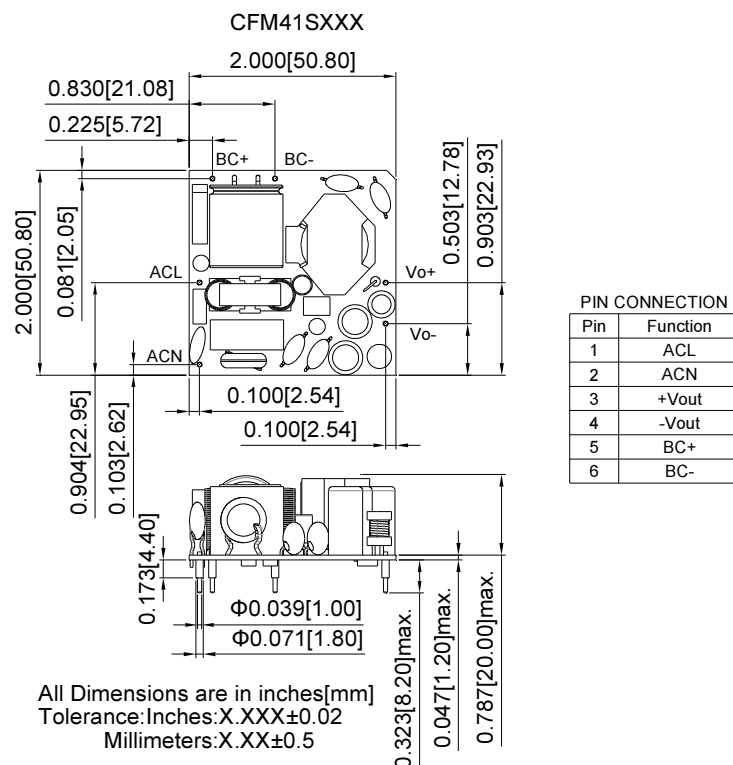


Mechanical Specification

CFM41SXXX-E

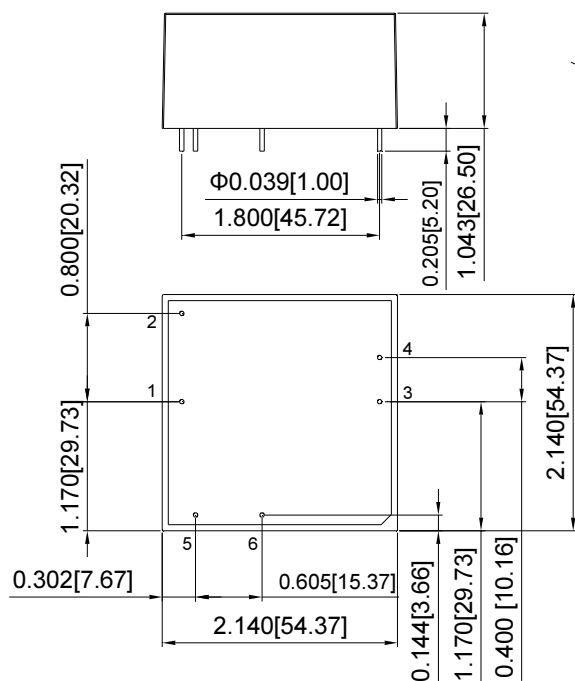

CFM41SXXX--T

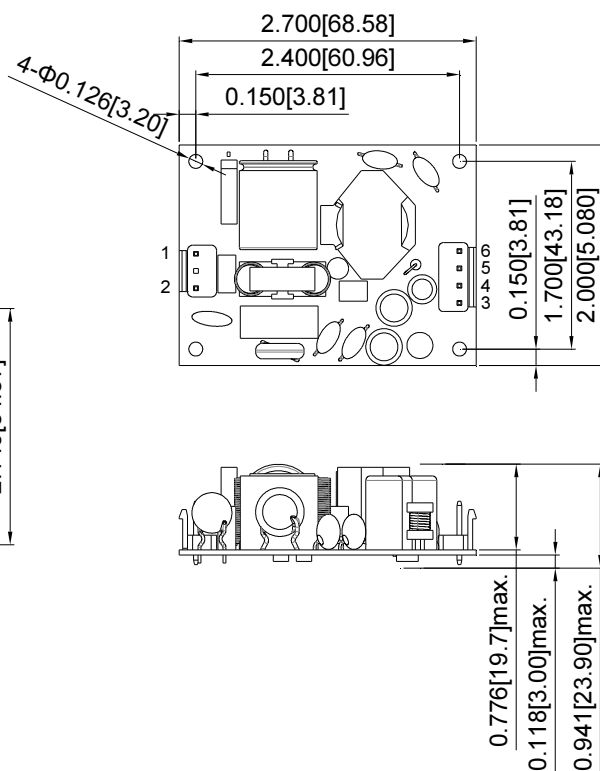

for CFM41SXXX-T
PIN CONNECTION

Pin	Function
1	ACL
2	ACN
3	-Vout
4	-Vout
5	+Vout
6	+Vout

PIN CONNECTION

Pin	Function
1	ACL
2	ACN
3	+Vout
4	-Vout
5	BC+
6	BC-

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[CFM41S050](#) [CFM41S050-E](#) [CFM41S050-T](#) [CFM41S120](#) [CFM41S120-E](#) [CFM41S120-T](#) [CFM41S360](#)
[CFM41S360-E](#) [CFM41S360-T](#) [CFM41S480](#) [CFM41S480-E](#) [CFM41S480-T](#) [CFM41S150](#) [CFM41S150-E](#)
[CFM41S150-T](#) [CFM41S240](#) [CFM41S240-E](#) [CFM41S240-T](#)