



CQB75W8 SERIES 75 WATT 8:1 INPUT ISOLATED DC-DC CONVERTER

Features

- Efficiency Up to 90%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Low No Load Power Consumption
- Fully Protected (OTP/OCP/OVP/UVLO)
- 3000Vac I/O Isolation
- Operating Case Temperature -40 to +105°C
- Quarter Brick Size Meet Industrial Standard
2.28"x1.45"x0.5"
- CB Test Certificate IEC 62368-1
- UL 62368-1 2nd (Reinforce Insulation) Approval
- EN 50155 Compliant with External Circuits
- Shock & Vibration EN 50155 (EN 61373) Compliant
- Fire & Smoke EN 45545-2 Compliant
- 5000m Operating Altitude
- -55°C Operating Available (Suffix "-M2")



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(1)	(2)	
CQB75W8-36S12	9-75 VDC	12 VDC	0 mA	6.25 A	8 mA	2315 mA	90	90	14000uF
CQB75W8-36S15	9-75 VDC	15 VDC	0 mA	5 A	8 mA	2315 mA	90	90	10000uF
CQB75W8-36S24	9-75 VDC	24 VDC	0 mA	3.12 A	10 mA	2311 mA	90	90	3900uF
CQB75W8-36S28	9-75 VDC	28 VDC	0 mA	2.67 A	10 mA	2307 mA	90	90	3200uF
CQB75W8-36S48	9-75 VDC	48 VDC	0 mA	1.56 A	10 mA	2311 mA	90	90	1100uF

NOTE:

1. Nominal Input Voltage 36 VDC.
2. Measured at 48Vin.
3. An External Input Capacitor 220uF for All Models are Recommended to Reduce Input Ripple Voltage.
4. -55°C Start-up Screen per MIL-STD105E S1 Sampling Procedure for "-M2" Version.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic	Mounting Inserts	Operating Case Temp. Range
CQB75W8-	II	O	XX	L	-Y (Option)	-Z (Option)
CQB75W8	36 : 36 VDC	S : Single	12 : 12VDC 15 : 15VDC 24 : 24VDC 28 : 28VDC 48 : 48VDC	None : Positive N : Negative	None : M3x0.5 Mounting Inserts -C : Clear Mounting Insert (3.2mm DIA.)	None : -40~105°C -M2 : -55~105°C

Part Number Example:

CQB75W8-36S12N-C-M2: Quarter Brick, 75W, 8:1 9-75Vdc Input, Single 12Vdc Output, Negative Logic, Clear Mounting Insert, -55~105°C Operating Case Temp. Range



CQB75W8 Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		75	V _{dc}
Input Surge Voltage	100ms max.	All			100	V _{dc}
Operating Case Temperature	At the center part of base plate (with Derating) Suffix "-M2" (with Derating)	All -M2	-40 -55		105 105	°C
Storage Temperature		All	-55		125	°C

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	9	36	75	V _{dc}
Input Under Voltage Lockout						
Turn-On Voltage Threshold		All	8.4	8.8	9.0	V _{dc}
Turn-Off Voltage Threshold		All	7.6	8	8.2	V _{dc}
Lockout Hysteresis Voltage		All		0.8		V _{dc}
Maximum Input Current	V _{in} =9V, Full load	All		10.5		A
No-Load Input Current	V _{in} =36V, I _o =0A		See Model Number Table			mA
Input Filter	Pi filter	All				
Inrush Current (I ² t)	As per ETS300 132-2	All			0.1	A ² s
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	All		30		mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V _{in} =36V, Full load, T _c =25°C	All	-1.0		+1.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±0.2	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.2	%
Temperature Coefficient	T _c =-40°C to 105°C	All			±0.02	%/°C
Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth)						
Peak-to-Peak	Full load, 22uF aluminum solid capacitor and 1uF ceramic capacitors	12Vo			150	mV
		15Vo			150	
		24Vo			240	
		28Vo			240	
		48Vo			480	
RMS.		12Vo			80	mV
		15Vo			80	
		24Vo			120	
		28Vo			120	
		48Vo			220	
Output Current Range	V _{in} = 9 to 75V		See Model Number Table			A
Over Current Protection	Hiccup mode. Auto recovery	All	110	150	210	%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (resistive)		See Model Number Table			uF
Output Voltage Trim Range	P _o ≤ max. rated power, I _o ≤ I _{o,max} .	All	-20		+15	%
Output Voltage Remote Sense Range	P _o ≤ max. rated power, I _o ≤ I _{o,max} . % of nominal V _o	All			+15	%
Over Voltage Protection	Limited voltage, % of nominal V _o	All	117	125	140	%



CQB75W8 Series

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	$V_{in}=36V, 48V$	See Model Number Table				%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I _{o_max} step load change dI/dt=0.1A/us (within 1% V _{out} nominal)	All			±5	%
Recovery Time					250	us
Turn-On Delay and Rise Time	Full load (Constant resistive load)					
Turn-On Delay Time, From On/Off Control	V _{on/off} to 10%V _{o_set} , Remote on	All		20		ms
Turn-On Delay Time, From Input	V _{in_min.} to 10%V _{o_set} , Power up	All		20		ms
Output Voltage Rise Time	10%V _{o_set} to 90%V _{o_set}	All		10		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2sec.)	1 Minute; input to output	All			3000 4200	V_{ac} V_{dc}
	1 Minute; input to case (base plate)				2100 3000	V_{ac} V_{dc}
	1 Minute; output to case (base plate)				1500 2100	V_{ac} V_{dc}
Isolation Resistance	Input to output	All	100			M Ω
Isolation Capacitance	Input to output	All		1000		pF
	Input to case (base plate)			None		
	Output to case (base plate)			1000		

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse width modulation (PWM), fixed	All	180	200	220	KHz
On/Off Control, Positive Remote On/Off Logic, Refer to -Vin Pin						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.0	V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=on	All	4.0		75	V
On/Off Control, Negative Remote On/Off Logic, Refer to -Vin Pin						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=off	All	4.0		75	V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.0	V
On/Off Current (for Both Remote On/Off Logic)	$I_{on/off}$ at $V_{on/off}=0V$	All		0.3	1	mA
Leakage Current (for Both Remote On/Off Logic)	Logic high, $V_{on/off}=15V$	All			30	uA
Off Converter Input Current	Shutdown input idle current	All		5	10	mA
Over Temperature Shutdown	Temperature at the center part of base plate, non-latching	All		110		$^{\circ}C$
Over Temperature Recovery				100		

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of $I_{o_max.}$; MIL-HDBK - 217F_Notice 1, GB, 25 $^{\circ}C$	36S12		663		K hours
		36S15		759		
		36S24		750		
		36S28		740		
		36S48		780		
Weight		All		66		grams
Case Material	Plastic, DAP, UL 94V-0					



CQB75W8 Series

GENERAL SPECIFICATIONS

Base plate Material	Aluminum
Potting Material	UL 94V-0
Pin Material	Base: Copper Plating: Nickel with Matte Tin
Shock/Vibration	MIL-STD-810F/EN 61373 Compliant
Humidity	95% RH max. Non condensing
Altitude	5000m Operating altitude, 12000m Transport altitude
Thermal Shock	MIL-STD-810F
Fire & Smoke	EN 45545-2 Compliant

EMC SPECIFICATIONS (External components required, please refer to application note.)

EMI	Meets EN 55032 & EN 50155 Compliant (with external filter)	Class A
ESD	EN 61000-4-2 Level 3: Air $\pm 8\text{kV}$, Contact $\pm 6\text{kV}$	Perf. Criteria A
Radiated immunity	EN 61000-4-3 Level 3: 80~1000MHz, 20V/m Level 2: 80~1000MHz, 3V/m for EN55035:2017	Perf. Criteria A
Fast Transient	EN 61000-4-4 Level 3: On power input port, $\pm 2\text{kV}$, external input capacitor required Level 1: On power input port, $\pm 0.5\text{kV}$, external input capacitor required, for EN 55035:2017	Perf. Criteria A
Surge	EN 61000-4-5 Level 4: Line to earth, $\pm 4\text{kV}$, Line to line, $\pm 2\text{kV}$ Level 1: Line to earth, $\pm 0.5\text{kV}$, for EN 55035:2017	Perf. Criteria A
Conducted immunity	EN 61000-4-6 Level 3: 0.15~80MHz, 10V Level 2: 0.15~30MHz, 3V, 30~80MHz, 1V for EN 55035:2017	Perf. Criteria A
Magnetic Immunity	EN 61000-4-8 Level 1: 50Hz, 1A/m for EN 55035:2017	Perf. Criteria A
Interruptions of Voltage Supply	EN 50155 Class S3: 20ms interruptions	Perf. Criteria A
Supply Change Over	EN 50155 Class C2: During a supply break of 30 ms	Perf. Criteria A
Application Note Link		CQB75W8-36S Series App Notes
Packaging Information Link		Packaging Information

Immunity to Environmental Conditions.

Phenomenon	EN 50155; 2021 Reference Clause(s)	Reference Standard	Test Conditions	Result
Low Temperature Test	13.4.4	EN 60068-2-1	Class OT6 Temperature: -40°C Duration: 2 hrs	Pass
Dry Heat Test	13.4.5	EN 60068-2-2	Class OT6 & Cycle A Temperature: 85°C Duration: 6 hrs	Pass
Low Temperature Storage Test	13.4.6	EN 60068-2-1	Temperature: -40°C Duration: 16 hrs	Pass
Cyclic Damp Heat Test	13.4.8	EN 60068-2-30	Temperature: 25°C - 55°C Humidity: 90% RH Duration: 48 hrs	Pass
Functional Random Vibration Test	13.4.10	EN 61373	Frequency range: 5 ~ 150 Hz Vertical: 1.01 m/s^2 Transverse: 0.450 m/s^2 Longitudinal: 0.700 m/s^2 Duration: 10 min / axis	Pass
Simulated Long Life Test at Increased Random Vibration Levels	13.4.10	EN 61373	Frequency range: 5 ~ 150 Hz Vertical: 5.72 m/s^2 Transverse: 2.55 m/s^2 Longitudinal: 3.96 m/s^2 Duration: 5 hrs / axis	Pass
Shock Test	13.4.10	EN 61373	$\pm$ Vertical: 30 m/s^2 $\pm$ Transverse: 30 m/s^2 $\pm$ Longitudinal: 50 m/s^2 Duration: 30ms x18 (Each axis 3 shocks)	Pass



CQB75W8 Series


EN45545-2 Fire & Smoke Test Conditions.

Item		Standard	Hazard Level
R22	Oxygen Index Test	EN 45545-2: 2013+A1:2015 EN ISO 4589-2: 2017	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013+A1:2015 EN ISO 5659-2: 2017	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013+A1:2015 NF X70-100-1&2: 2006	HL1, HL2, HL3
R23	Oxygen Index Test	EN 45545-2: 2013+A1:2015 EN ISO 4589-2: 2017	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013+A1:2015 EN ISO 5659-2: 2017	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013+A1:2015 NF X70-100-1&2: 2006	HL1, HL2, HL3
R24	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2	HL1, HL2, HL3
R25	Glow - Wire Test	EN 45545-2:2020+A1:2023 EN 60695-2-11:2014	HL1, HL2, HL3
R26	Vertical Flame Test	EN 45545-2: 2013+A1:2015 EN 60695-11-10: 2013	HL1, HL2, HL3


CHARACTERISTIC CURVE

Power Derating Curve



**CQB75W8-36S Derating Curve
without Heatsink (Vin=36V)**

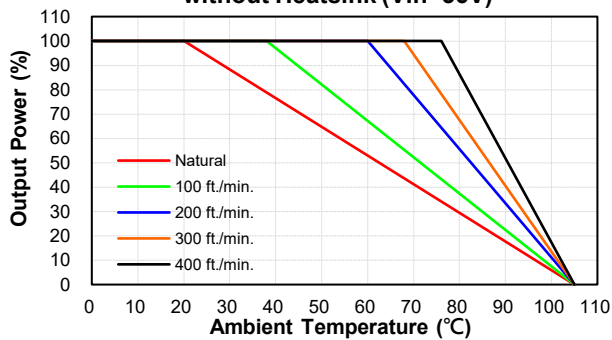

**CQB75W8-36S Derating Curve
with Heatsink QBL127 (Vin=36V)**

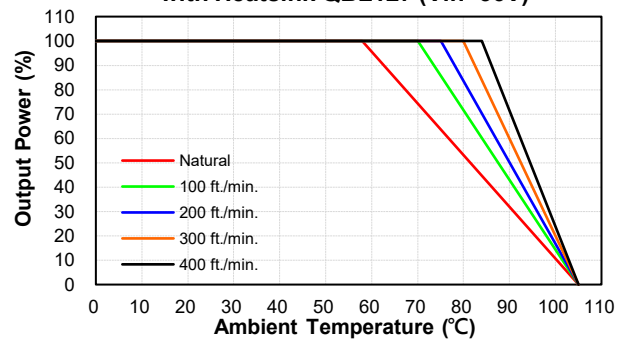

**CQB75W8-36S Derating Curve
with Heatsink QBT210 (Vin=36V)**

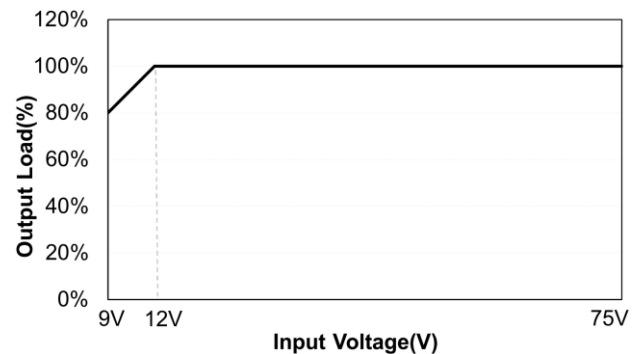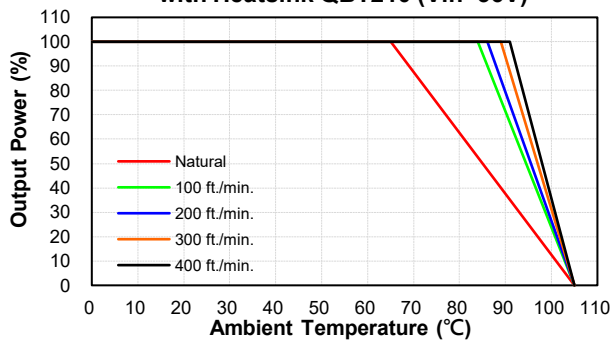





CQB75W8 Series

Performance Data


CQB75W8-36S12
Eff Vs Io @25 Deg. C

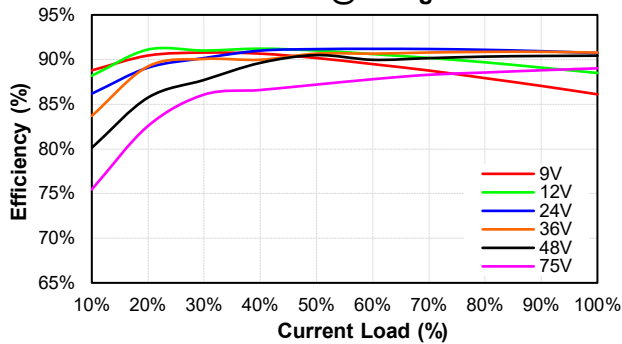


CQB75W8-36S12
Pd Vs Po @25 Deg. C

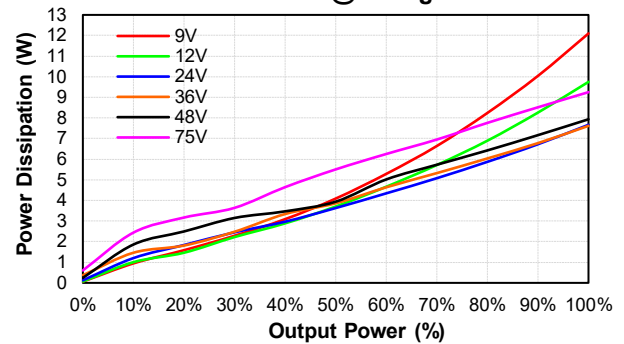


CQB75W8-36S15
Eff Vs Io @25 Deg. C

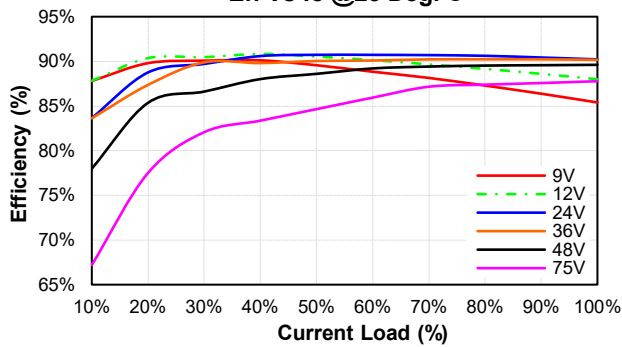


CQB75W8-36S15
Pd Vs Po @25 Deg. C

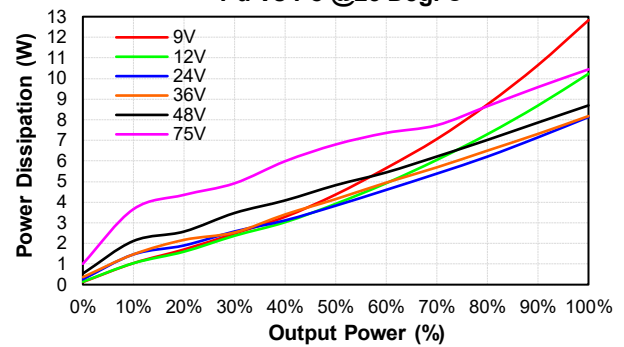


CQB75W8-36S24
Eff Vs Io @25 Deg. C

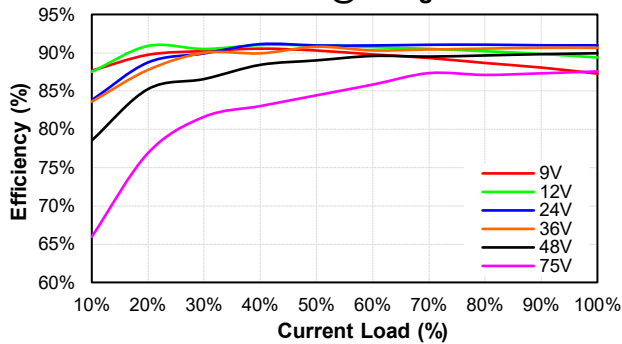


CQB75W8-36S24
Pd Vs Po @25 Deg. C

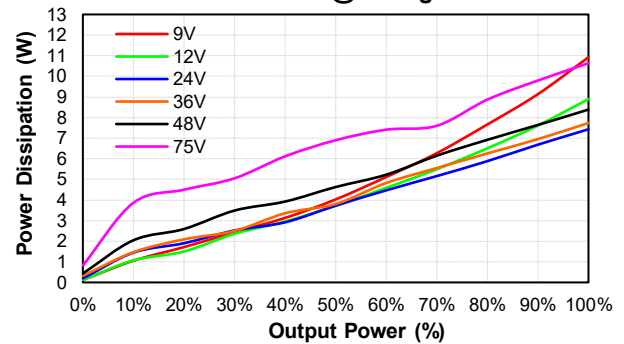

CQB75W8-36S28
Eff Vs Io @25 Deg. C

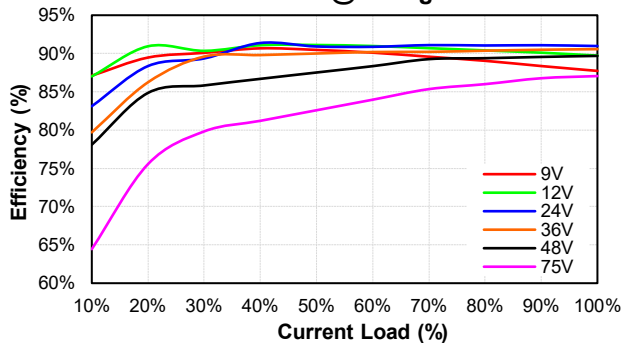


CQB75W8-36S28
Pd Vs Po @25 Deg. C

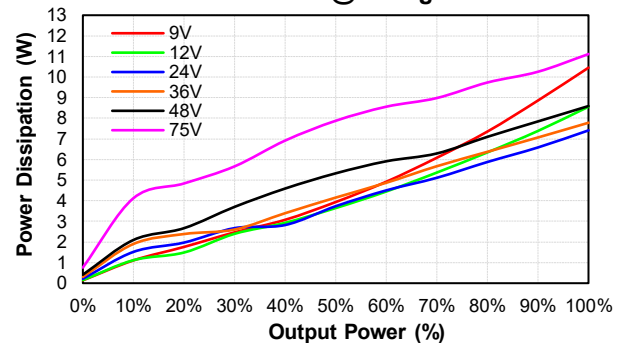




CQB75W8 Series


CQB75W8-36S48
Eff Vs Io @25 Deg. C

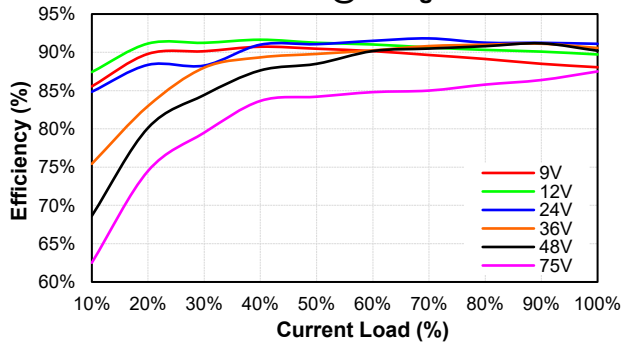

CQB75W8-36S48
Pd Vs Po @25 Deg. C

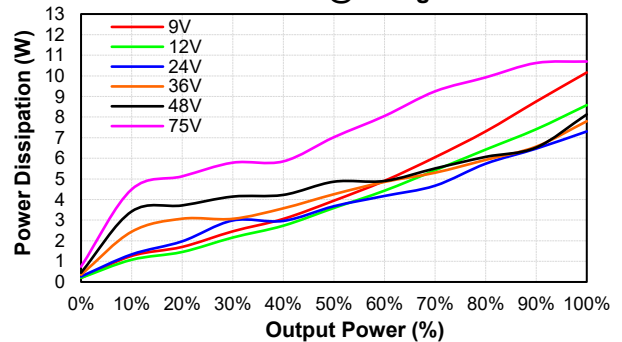

MECHANICAL SPECIFICATION

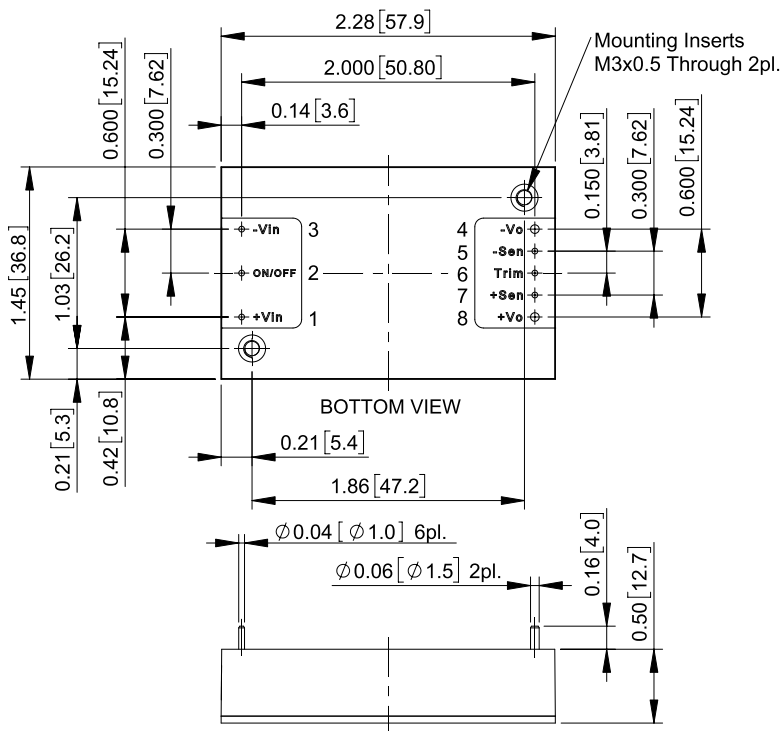

All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
Millimeters: x.x=±0.5, x.xx=±0.25

Pin Connection

Pin	Function
1	+V Input
2	On/Off
3	-V Input
4	-V Output
5	-Sense
6	Trim
7	+Sense
8	+V Output

Note: Pin Size is $\varnothing 0.04 \pm 0.004$ Inch [$\varnothing 1.0 \pm 0.1$ mm]
Pin Size is $\varnothing 0.06 \pm 0.004$ Inch [$\varnothing 1.5 \pm 0.1$ mm]

CINCON Electronics Co. Ltd.
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com
Web: www.cincon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cincon:](#)

[CQB75W8-36S12-C](#) [CQB75W8-36S15](#) [CQB75W8-36S15-C](#) [CQB75W8-36S24](#) [CQB75W8-36S24-C](#) [CQB75W8-36S28](#) [CQB75W8-36S28-C](#) [CQB75W8-36S48](#) [CQB75W8-36S48-C](#) [CQB75W8-36S12](#) [CQB75W8-36S12N](#) [CQB75W8-36S12N-C](#) [CQB75W8-36S15N](#) [CQB75W8-36S15N-C](#) [CQB75W8-36S24N](#) [CQB75W8-36S24N-C](#) [CQB75W8-36S28N](#) [CQB75W8-36S28N-C](#) [CQB75W8-36S48N](#) [CQB75W8-36S48N-C](#)