




EC2A SERIES

1.5 WATT

DC-DC CONVERTERS

FEATURES

- * 1.5W Output Power
- * DIP-24/SMD Package
- * Efficiency to 50%
- * Regulated Outputs
- * PI Input Filter
- * Low Ripple and Noise

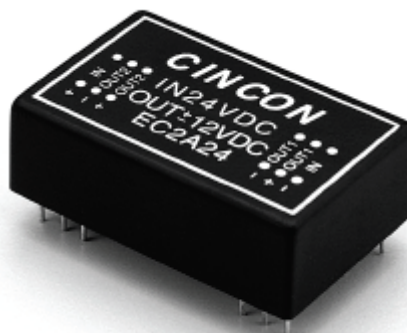

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		CASE
				NO LOAD	FULL LOAD	
EC2A01	5 VDC	5 VDC	300 mA	110 mA	620 mA	DIP-24
EC2A02	5 VDC	12 VDC	125 mA	110 mA	550 mA	DIP-24
EC2A03	5 VDC	15 VDC	100 mA	110 mA	550 mA	DIP-24
EC2A04	5 VDC	±12 VDC	±60 mA	110 mA	550 mA	DIP-24
EC2A05	5 VDC	±15 VDC	±50 mA	110 mA	550 mA	DIP-24
EC2A11	12 VDC	5 VDC	300 mA	40 mA	260 mA	DIP-24
EC2A12	12 VDC	12 VDC	125 mA	40 mA	215 mA	DIP-24
EC2A13	12 VDC	15 VDC	100 mA	40 mA	215 mA	DIP-24
EC2A14	12 VDC	±12 VDC	±60 mA	40 mA	215 mA	DIP-24
EC2A15	12 VDC	±15 VDC	±50 mA	40 mA	215 mA	DIP-24
EC2A21	24 VDC	5 VDC	300 mA	20 mA	130 mA	DIP-24
EC2A22	24 VDC	12 VDC	125 mA	20 mA	115 mA	DIP-24
EC2A23	24 VDC	15 VDC	100 mA	20 mA	115 mA	DIP-24
EC2A24	24 VDC	±12 VDC	±60 mA	20 mA	115 mA	DIP-24
EC2A25	24 VDC	±15 VDC	±50 mA	20 mA	115 mA	DIP-24
EC2A31	28 VDC	5 VDC	300 mA	20 mA	110 mA	DIP-24
EC2A32	28 VDC	12 VDC	125 mA	20 mA	100 mA	DIP-24
EC2A33	28 VDC	15 VDC	100 mA	20 mA	100 mA	DIP-24
EC2A34	28 VDC	±12 VDC	±60 mA	20 mA	100 mA	DIP-24
EC2A35	28 VDC	±15 VDC	±50 mA	20 mA	100 mA	DIP-24
EC2A41	48 VDC	5 VDC	300 mA	15 mA	65 mA	DIP-24
EC2A42	48 VDC	12 VDC	125 mA	15 mA	60 mA	DIP-24
EC2A43	48 VDC	15 VDC	100 mA	15 mA	60 mA	DIP-24
EC2A44	48 VDC	±12 VDC	±60 mA	15 mA	60 mA	DIP-24
EC2A45	48 VDC	±15 VDC	±50 mA	15 mA	60 mA	DIP-24

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range $\pm 10\%$
Input Filter PI Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy $\pm 4.0\%$ max.
Temperature coefficient $\pm 0.02\%/^{\circ}\text{C}$
Ripple & Noise, 20MHz BW 50mV pk-pk max.
Short Circuit Protection Momentary
Line Regulation $\pm 0.3\%$
Load Regulation $\pm 0.5\%$

GENERAL SPECIFICATIONS:

Efficiency 50%
Isolation Capacitance 30pF
Isolation Resistance 10^9 ohm
Switching Frequency 20KHz min.
Operating Ambient Temperature Range -25°C to $+71^{\circ}\text{C}$
De-rating, Above 71°C (Plastic Case) Linearly to Zero power at 95°C
De-rating, Above 71°C (Copper Case) Linearly to Zero power at 100°C
Case Temperature (Plastic case note 2) 95°C max.
(Copper case note 2) 100°C max.
Cooling Natural Convection
Storage Temperature Range -40°C to $+100^{\circ}\text{C}$
Dimensions DIP $1.25 \times 0.80 \times 0.40$ inches (31.8x20.3x10.2mm)
SMD $1.25 \times 0.80 \times 0.45$ inches (31.8x20.3x11.4mm)
Weight 12.5g

ISOLATION VOLTAGE:


500 VDC min. Standard Models
3KVDC min. Suffix "H" Models
1.5KVDC min. Suffix "HM" Models

CASE MATERIAL:

Standard Models Non-Conductive Black Plastic
Suffix "M" Models Black Coated Copper with Non-conductive Base

NOTE:

1. Suffix "S" to the Model Number with SMD packages.
2. Maximum case temperature under any operating condition should not be exceeded 95°C (Plastic Case), 100°C (Copper Case).

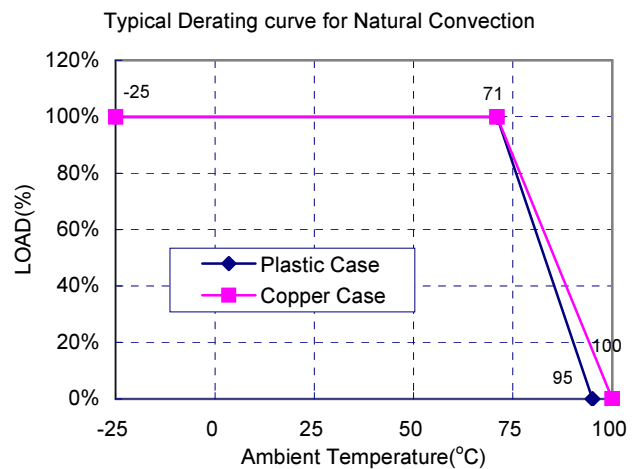

Case A Dimensions:


NOTE: Pin Size is 0.02" Inch (0.5mm) DIA ± 0.05

All Dimensions In Inches (mm)

Tolerances Inches: X.XX = ± 0.02 , X.XXX = ± 0.010

Millimeters: X.X = ± 0.5 , X.XX = ± 0.25

CASE AS

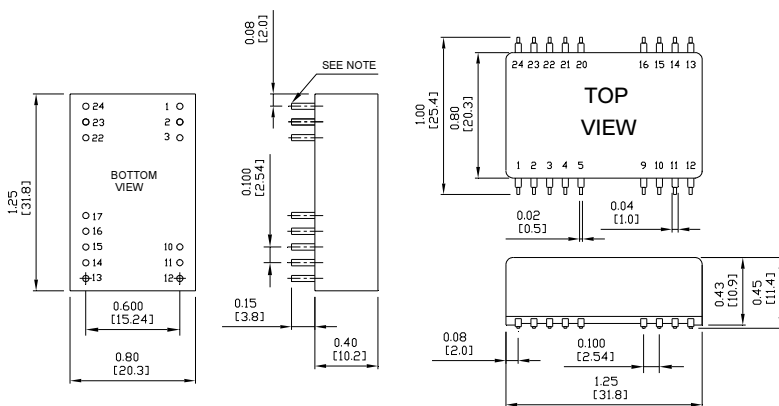

PIN CONNECTION									
500 VDC					1.5K & 3K VDC				
Pin	Single Output		Dual Output		Pin	Single Output		Dual Output	
	DIP	SMD	DIP	SMD		DIP	SMD	DIP	SMD
1,24	+V Input		+V Input		1,2,3	+V Input		+V Input	
2,23	NC		-V Output		22,23,24	-V Input		-V Input	
3,22	NC		Common		4	NP	NC	NP	NC
4,5	NP	NC	NP	NC	5	NP	NC	NP	NC
9	NP	NC	NP	NC	9	NP	NC	NP	NC
10	-V Output		Common		10,11	NP	NC	Common	
11	+V Output		+V Output		12	-V Output		-TP	
12,13	-V Input		-V Input		13	+V Output		-V Output	
14	+V Output		+V Output		14	NP	NC	NP	NC
15	-V Output		Common		15	NP	NC	+V Output	
16	NP	NC	NP	NC	16	NP	NC	+TP	
17	NP		NP		17	+TP	NP	NP	
20,21	NP	NC	NP	NC	20,21	NP	NC	NP	NC

* NP-NO PIN

* NC-NO CONNECTION WITH PIN

* TP-TEST POINT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[EC2A04M](#) [EC2A42M](#) [EC2A03M](#) [EC2A44M](#) [EC2A45M](#) [EC2A25M](#) [EC2A13M](#) [EC2A23M](#) [EC2A12M](#) [EC2A35M](#)
[EC2A33M](#) [EC2A34M](#) [EC2A32M](#) [EC2A03NM](#) [EC2A04NM](#) [EC2A13NM](#) [EC2A11NM](#) [EC2A12NM](#) [EC2A01](#) [EC2A02](#)
[EC2A04](#) [EC2A05](#) [EC2A11](#) [EC2A12](#) [EC2A13](#) [EC2A14](#) [EC2A15](#) [EC2A21](#) [EC2A22](#) [EC2A23](#) [EC2A25](#) [EC2A31](#)
[EC2A32](#) [EC2A33](#) [EC2A34](#) [EC2A35](#) [EC2A41](#) [EC2A42](#) [EC2A43](#) [EC2A44](#) [EC2A45](#) [EC2A01N](#) [EC2A02N](#)
[EC2A03N](#) [EC2A04N](#) [EC2A05N](#) [EC2A11N](#) [EC2A12N](#) [EC2A13N](#) [EC2A14N](#) [EC2A15N](#) [EC2A09M](#) [EC2A19M](#)
[EC2A12S](#) [EC2A24HM](#) [EC2A04N-H](#) [EC2A01N-H](#) [EC2A04N-S](#) [EC2A45S](#) [EC2A41S](#) [EC2A05S](#) [EC2A12H](#)
[EC2A23S](#) [EC2A21S](#) [EC2A14N-S](#) [EC2A35H](#) [EC2A42HM](#) [EC2A01N-S](#) [EC2A14N-HM](#) [EC2A03HM](#) [EC2A13N-S](#)
[EC2A04H](#) [EC2A22HM](#) [EC2A02N-HM](#) [EC2A13N-H](#) [EC2A04S](#) [EC2A43HM](#) [EC2A23H](#) [EC2A34S](#) [EC2A44S](#)
[EC2A05N-H](#) [EC2A33HM](#) [EC2A03N-S](#) [EC2A05H](#) [EC2A04HM](#) [EC2A15N-HM](#) [EC2A03H](#) [EC2A05HM](#) [EC2A24H](#)
[EC2A01M](#) [EC2A01NM](#) [EC2A02M](#) [EC2A02NM](#) [EC2A09NM](#) [EC2A11M](#) [EC2A19NM](#) [EC2A21M](#) [EC2A22M](#)
[EC2A31M](#) [EC2A41M](#)