



TRH100A SERIES

100W SWITCHING

ADAPTER WITH PFC



Features

- * Universal Input Range: 90~264VAC
 - * Active PFC Meets EN61000-3-2
 - * Conductive EMI Meets CISPR/FCC Class B
 - * No Load Power Consumption < 150mW
 - * Continuous Short Circuit Protection
 - * Over Voltage Protection
 - * Meet CoC Tier 2 & DoE Level VI
- (Output Cable Length $\leq$ 1800mm)
 (TRH100A120~150: Output Cable Length $\leq$ 1220mm)
 (TRH100A180~480: Output Cable Length $\leq$ 1800mm)



Ordering information

TRH100AXXX- XX	X	XX
Model No.	DC Plug Type	DC Cable Length and Type
	OVP	
	E: WITH OVP	11: 720mm with Ferrite Core
		12: 1220mm with Ferrite Core
		13: 1800mm with Ferrite Core
		14: 1000mm with Ferrite Core
		21: 720mm with two Ferrite Core
		22: 1220mm with two Ferrite Core
		23: 1800mm with two Ferrite Core
		*UL2464 for all Model

MODEL	OUTPUT VOLTAGE	MIN. LOAD	OUTPUT CURRENT	RIPPLE & NOISE (NOTE1)	VOLTAGE SETPOINT (NOTE2)	LINE REGULATION (NOTE3)	LOAD REGULATION (NOTE4)	%EFF (Typ) (NOTE5)
TRH100A120	12V	0 A	8.34A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 4\%$	89%
TRH100A135	13.5V	0 A	7.33A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 4\%$	89%
TRH100A150	15V	0 A	6.67A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 4\%$	89%
TRH100A180	18V	0 A	5.56A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH100A190	19V	0A	5.26A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH100A240	24V	0 A	4.17A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH100A280	28V	0 A	3.54A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH100A360	36V	0 A	2.78A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH100A480	48V	0 A	2.1A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 47 to 63Hz
 Inrush Current 120A max. @240Vac
 Conducted EMI CISPR/FCC Class B
 Leakage Current 3.5mA max.

OUTPUT SPECIFICATIONS:

Holdup Time 16ms typ. @115Vac
 Short Circuit Protection Continuous
 Over Voltage Protection Yes



GENERAL SPECIFICATIONS:

Isolation Input to output = 4,242VDC
 Operating Temperature -30°C ~ 70°C, 40°C~70°C with -1.67%/°C
 Storage Temperature -40~85°C
 Operating Humidity.....93%RH max. no condensing
 Cooling Natural Convection
 Switching Frequency 65KHz Typical
 Operating Altitude.....Sea Level to 5000m
 AC Inlet IEC320/C14,C6
 MTBF,MIL-HDBK-217F(25°C Ta) 160K hrs min.
 Dimensions 5.591x2.283x1.457 inches (142.00x58.00x37.00 mm)
 Weight 485g

SAFETY AND EMC:

Emission and Immunity EN55032 Class B, FCC Part 15 Class B
 EN61000-3-2, EN61000-3-3, EN55024
 EN61204-3
 Safety Class I, IEC/UL/EN62368-1, IEC/UL/EN60950-1


TRH100A Series Derating Curve

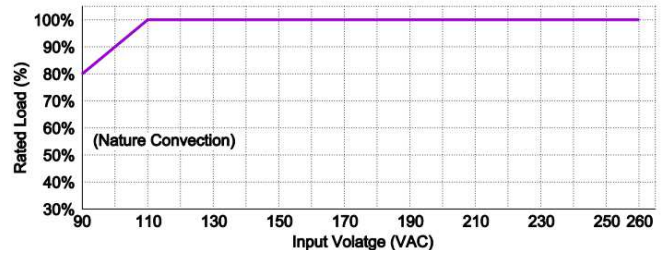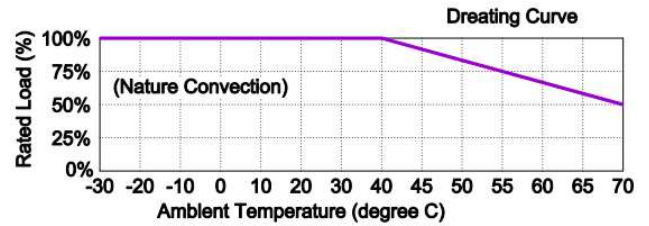

NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measurement @20MHz BW.
2. Voltage setpoint at 60% full load
3. Line regulation measured from 100Vac to 240Vac with full load.
4. Load regulation measured from 60% to 100% full load and from 60% to 20% full load (60% +/- 40% full load)
5. Average Efficiency measured at 25%,50%,75%,100% load, 230Vac Input voltage.
6. Inrush current at 120A Max./ 200us for AC turn on.

All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5
 UNIT:inches(mm)

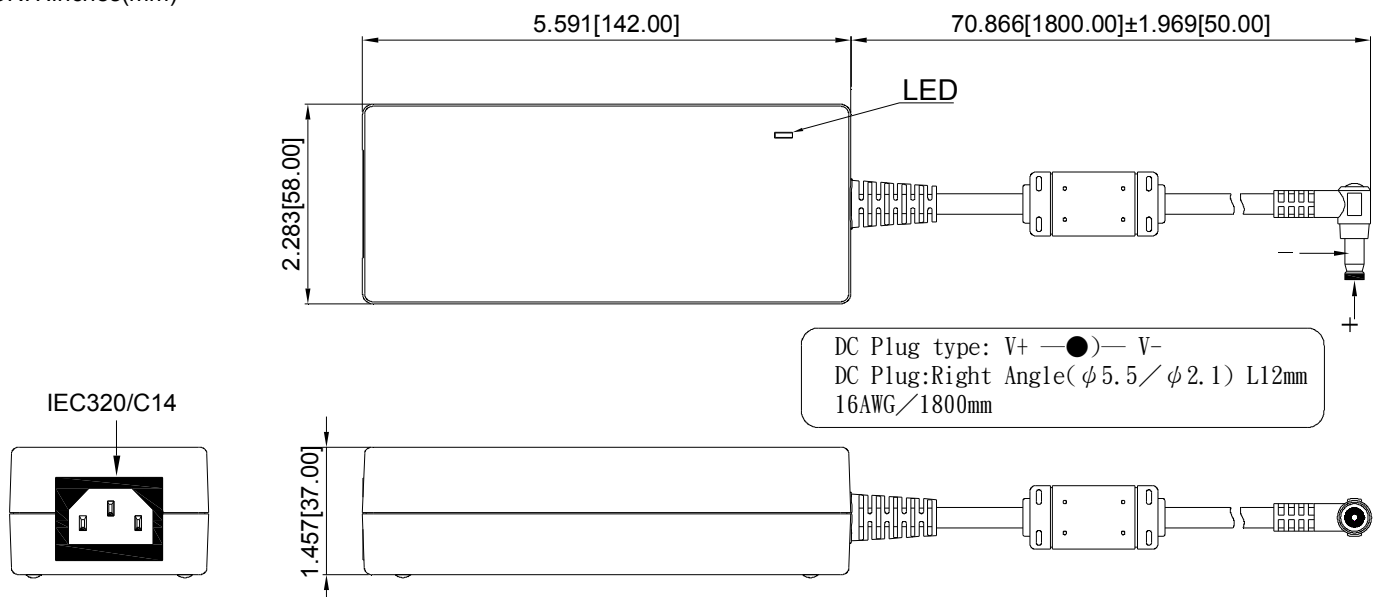

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[TRH100A240-35E13-Level-VI](#) [TRH100A120-02E12-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A120-40E12-Level-VI](#) [TRH100A135-02E12-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A360-02E13-Level-VI](#) [TRH100A280-02E13-Level-VI](#) [TRH100A360-12E13-Level-VI](#) [TRH100A120-12E12-Level-VI](#) [TRH100A135-12E12-Level-VI](#) [TRH100A180-12E13-Level-VI](#) [TRH100A240-49E13-Level-VI](#) [TRH100A240-40E13-Level-VI](#) [TRH100A280-01E13-Level-VI](#) [TRH100A240-48E13-Level-VI](#) [TRH100A240-39E13-Level-VI](#) [TRH100A480-21E13-Level-VI](#) [TRH100A480-01E13-Level-VI](#) [TRH100A150-12E12-Level-VI](#) [TRH100A190-11E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A480-11E13-Level-VI](#) [TRH100A120-49E12-Level-VI](#) [TRH100A190-12E13-Level-VI](#) [TRH100A120-36E12-Level-VI](#) [TRH100A120-11E12-Level-VI](#) [TRH100A180-01E13-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A135-01E12-Level-VI](#) [TRH100A240-11E13-Level-VI](#) [TRH100A120-35E12-Level-VI](#) [TRH100A360-01E13-Level-VI](#) [TRH100A480-02E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH100A240-12E13-Level-VI](#) [TRH100A360-11E13-Level-VI](#) [TRH100A190-01E13-Level-VI](#) [TRH100A150-11E12-Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A120-01E12-Level-VI](#) [TRH100A120-48E12-Level-VI](#) [TRH100A190-02E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#) [TRH100A120-39E12-Level-VI](#) [TRH100A150-02E12-Level-VI](#) [TRH100A150-01E12-Level-VI](#) [TRH100A135-11E12-Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH100A120-02E12-VI](#) [TRH100A280-62E13-Level-VI](#) [TRH100A240-21E12-Level-VI](#) [TRH100A240-11E12 VI](#) [TRH100A360-11E12 VI](#) [TRH100A480-11E12 VI](#)