

December 22, 1997

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

HIGH CURRENT, HIGH DENSITY, STANDARD RECOVERY SILICON POWER RECTIFIER STUD

QUICK REFERENCE DATA

- Low thermal impedance
- Low forward voltage drop
- High current applications
- Low reverse leakage current
- High surge ratings

- $V_R = 50V - 1000V$
- $I_F = 150A$
- $I_R = 12.0\mu A$
- $I_{FSM} = 1800A$


ABSOLUTE MAXIMUM RATINGS

Device Type *	Working Reverse Voltage (V _{RWM})	Average Rectified Current I _{F(AV)}					1 Cycle Surge Current I _{FSM} t _p = 8.3mS		Repetitive Surge Current I _{FRM}
		insert mounting			stud mounting	stud + insert mounting	@ 25 °C	@ 100 °C	@ 25 °C
		@ 25 °C	@ 55 °C	@ 100 °C	@ 55 °C	@ 55 °C			
	Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps
SCSM05	50	↑	↑	↑	↑	↑	↑	↑	↑
SCSM1	100								
SCSM2	200								
SCSM4	400	150	110	70	95	175	1800	840	250
SCSM6	600	↓	↓	↓	↓	↓	↓	↓	↓
SCSM8	800								
SCSM0	1000	↓	↓	↓	↓	↓	↓	↓	↓

Normal polarity is cathode to stud

* add suffix "R" to part number for reverse polarity

MECHANICAL

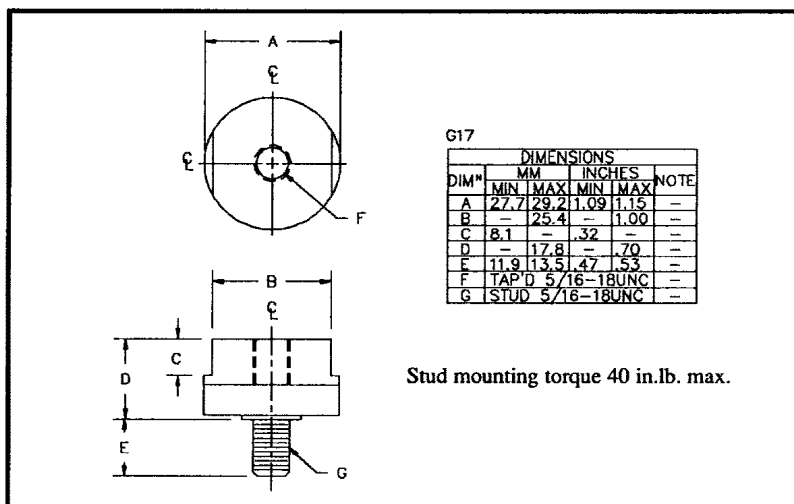

Maximum thermal impedances

Stud mounted $R_{\theta JC} < 0.67^{\circ}C/W$

Insert mounted $R_{\theta JC} < 0.5^{\circ}C/W$

Stud + insert mtd $R_{\theta JC} < 0.28^{\circ}C/W$

December 22, 1997

ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current I_R @ V_{RWM}		Forward Voltage V_F @ 100A.	Reverse Recovery Time ⁽¹⁾
	@ 25 °C	@ 100 °C	Max @ 25°C	max @ 25 °C
	μA	μA	Volts	μS
SCSM05	12.0	400	1.15	2.0
SCSM1				
SCSM2				
SCSM4				
SCSM6				
SCSM8				
SCSM0				

1) Measured on discrete devices prior to assembly.

Operating temperature range -55 °C to +150 °C
Storage temperature range -55 °C to +150 °C

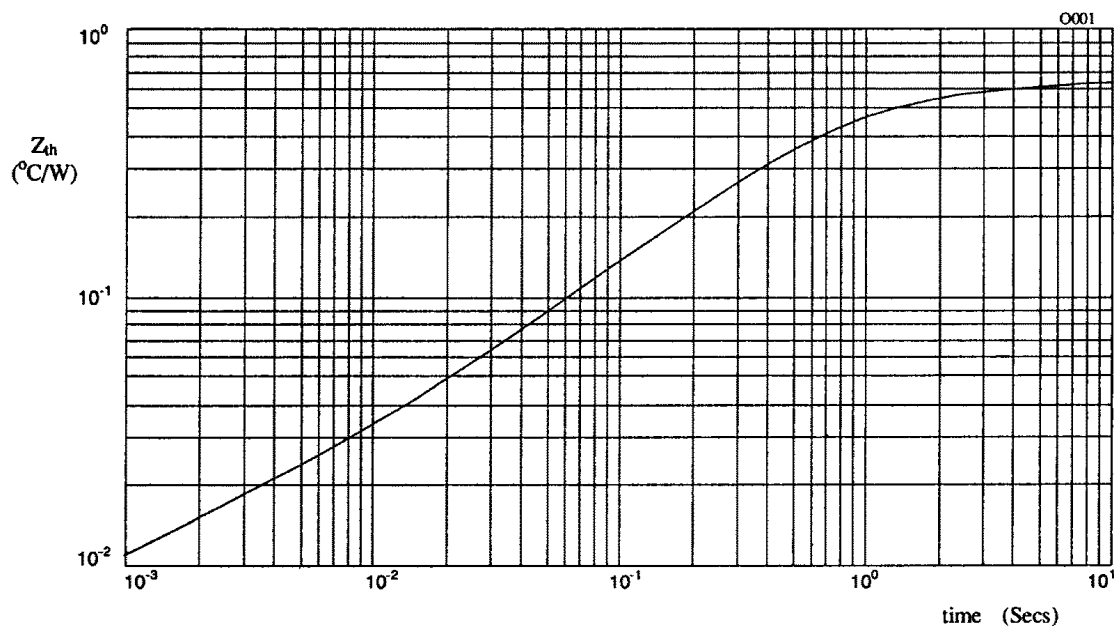


Figure 1. Transient thermal impedance characteristic when stud mounted.

December 22, 1997

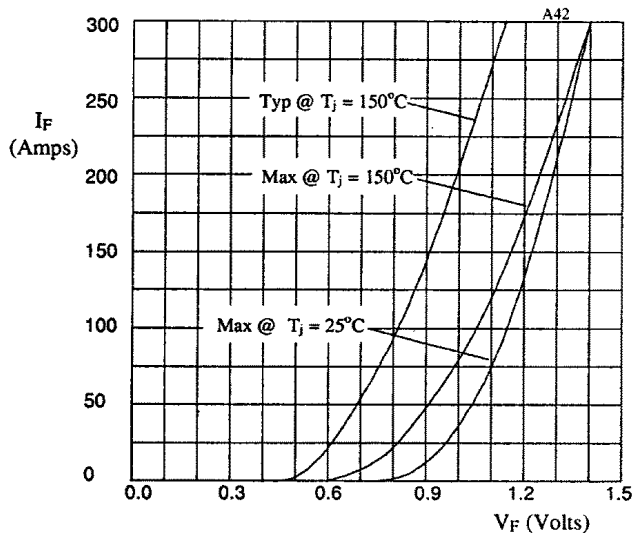


Fig 2. Forward voltage drop as a function of forward current.

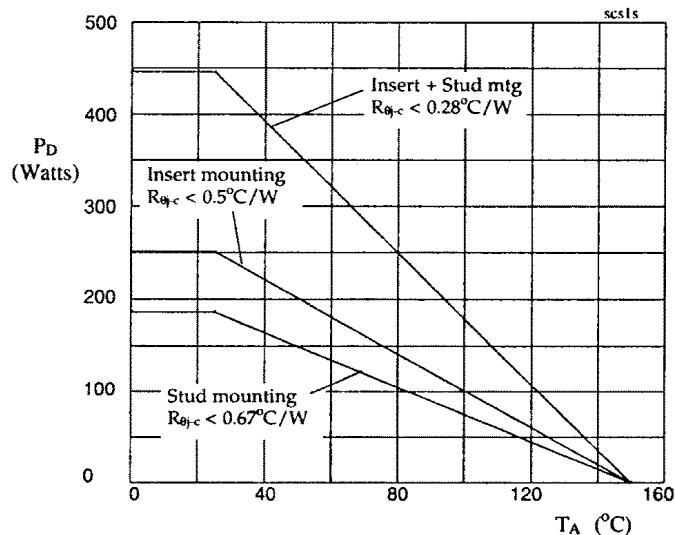


Fig 3. Power dissipation as a function of ambient temperature for different mountings.

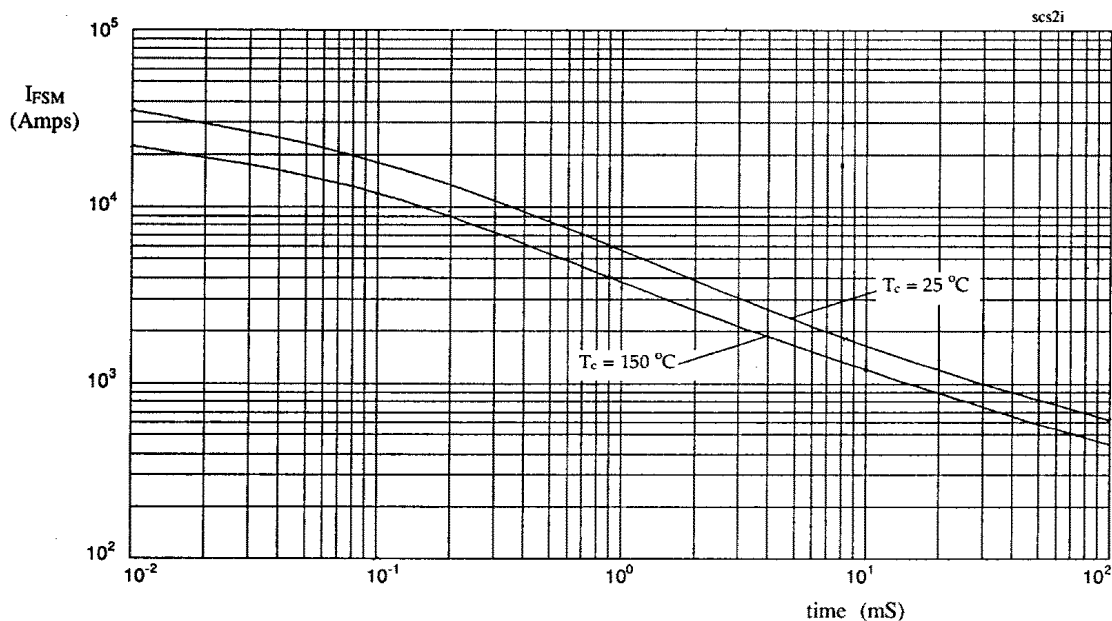


Figure 4. Maximum non-repetitive surge current against pulse width.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[SCSM6R](#)