

January 16, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

STANDARD RECOVERY, HIGH CURRENT 1-PHASE FULL WAVE BRIDGE RECTIFIER ASSEMBLIES

- Low forward voltage drop
- Low reverse leakage current
- Aluminium case
- Low thermal impedance
- Insulated electrical connections

QUICK REFERENCE DATA


- $V_R = 50V - 1000V$
- $I_F = 53A$
- $I_R = 6.0 \mu A$
- $t_{rr} = 2.0 \mu S$

ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current $I_F(AV)$						1 Cycle Surge Current	
		(@ case temperature)			(@ ambient temperature)			$I_{FSM} t_p = 8.3mS$	
		@ 55°C	@ 100°C	@ 125°C	@ 25°C	@ 55°C	@ 100°C	@ 25°C	@ 100°C
	Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps
SCBAR05	50								
SCBAR1	100								
SCBAR2	200								
SCBAR4	400	53	35	25	9.5	7.0	4.5	375	250
SCBAR6	600								
SCBAR8	800								
SCBAR10	1000								

$$R_{\theta JC} = 0.7^{\circ}C/W$$

MECHANICAL

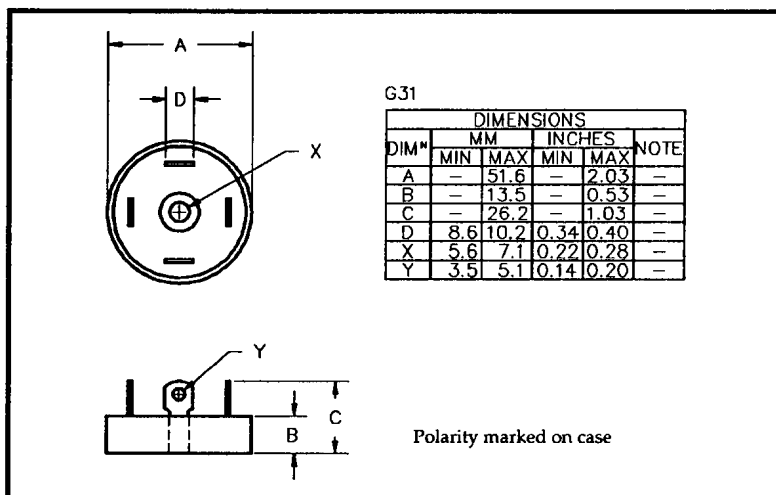

January 16, 1998

ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current I_R @ V_{RWM}		Maximum Forward Voltage V_F @ 9A/leg	Reverse Recovery Time ¹ t_{rr} @ 25°C	Maximum operating & storage temp. range. T_{OP} T_{STG}
	@ 25°C	@ 100°C			
	μA	μA	Volts	μS	°C
SCBAR05 SCBAR1 SCBAR2 SCBAR4 SCBAR6 SCBAR8 SCBAR10	6.0	240	1.0	2.0	-55 to +150

¹ Measured on discrete devices prior to assembly

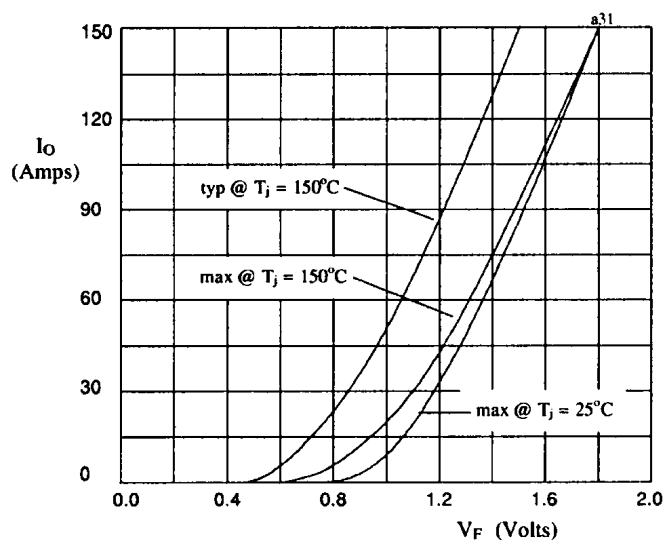


Fig 1. Forward voltage drop against output current per leg.

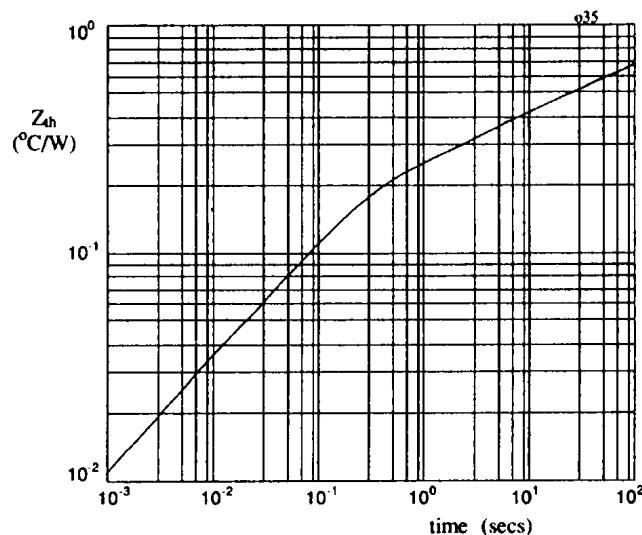


Fig 2. Transient thermal impedance characteristic per leg

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[SCBAR05](#) [SCBAR1](#) [SCBAR6](#) [SCBAR10](#)