IGS-1082GP



Industrial 10-port unmanaged Gigabit Ethernet switch with 8x10/100/1000Base-T(X) and 2x100/1000Base-X, SFP socket

Features

- Support auto-negotiation and auto-MDI/MDI-X
- Support store and forward transmission
- Support flow control
- Support up to **9.6K** Bytes Jumbo Frame
- Support up to 4Mbit Packet buffer
- Support wide range power input 12~48VDC
- Provide DIP-switch to setting SFP speed
- Provided relay output for power failed warning system
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled

-40~75°C


Introduction

IGS-1082GP is full Gigabit unmanaged Ethernet switch with 8x10/100/1000Base-T(X) copper ports and 2x100/1000Base-X SFP ports. The switch support wide operating temperature from -40 oC to 75 oC for harsh environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-unmanaged Ethernet application.

Practical Operation

IGS-1082GP can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.



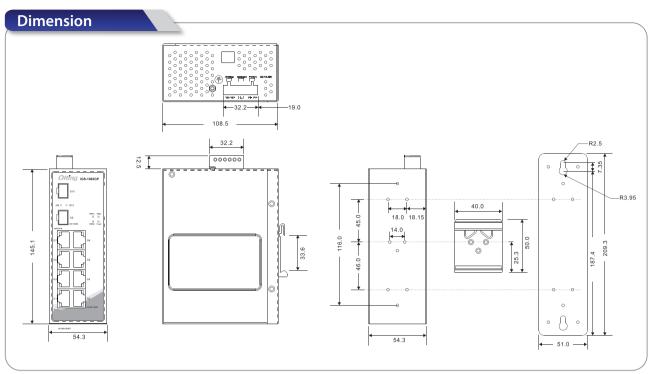

(Unit=mm)

Specifications

ORing Switch Model	IGS-1082GP			
Physical Ports				
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	8			
100/1000Base-X with SFP port	2			
Technology				
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow control			
MAC Table	8K			
Processing	Store-and-Forward			
Switch Properties	Switching latency: 7 us Switching bandwidth: 20Gbps			
Jumbo frame	Up to 9.6K Bytes			
Packet buffer	4Mbit			
LED Indicators				
Power Indicator (PWR)	Green : Power LED x 3			
Fault Indicator (Fault)	Amber : Indicate power failed even warning			
10/100/1000Base-T(X) RJ45 Port Indicator	Green for port Link/Act. Dual color LED for speed indicator ~ Green for 1000Mbps / Amber for 100Mbps / off-light for 10Mbps			
100/1000Base-X SFP Port Indicator	Green for port Link/Act.			
DIP Switch				
DIP-Switch 1	Power-2 failed warning : (ON) enable, (OFF) disable			
DIP-Switch 2	Power-1 failed warning : (ON) enable, (OFF) disable			
DIP-Switch 3	DIP switch 3 and 4 (ON) : SFP speed setting to 100Mbps			
DIP-Switch 4	DIP switch 3 and 4 (OFF) : SFP speed setting to 1000Mbps(default)			
Fault Contact				
Relay	Relay output to carry capacity of 1A at 24VDC			

v1.0 / Oct, 2017

Power			
Redundant Input power	Dual DC inputs. 12 ~ 48VDC on 6-pin terminal block		
Power consumption (Typ.)	10 Watts		
Overload current protection	Present		
Reverse Polarity Protection	Present		
Physical Characteristic			
Enclosure	IP-30		
Dimension (W x D x H)	54.3(W) x 108.3(D) x 145.1(H) mm (2.13x4.26x5.71 inches.)		
Weight (g)	837g		
Environmental			
Storage Temperature	-40 to 85°C (-40 to 185°F)		
Operating Temperature	-40 to 75°C (-40 to 167°F)		
Operating Humidity	5% to 95% Non-condensing		
Regulatory Approvals			
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B		
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A		
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS),IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))		
Shock	IEC60068-2-27		
Free Fall	IEC60068-2-31		
Vibration	IEC60068-2-6		
Safety	EN60950-1		
MTBF	722009hrs		
Warranty	5 years		

Ordering Information

IGS]		
Code Definition	10/100/1000Base-T(X) Port Number - 08: 8 ports		Additional Port Number	Additiona	Additional Port Type		
Option			- 2: 2 ports - GP: Gigabit SFP po		ts		
Available Model	Model Name		Description				
	IGS-1082GP	Industrial ²	Industrial 10-port unmanaged Gigabit Ethernet switch with 8x10/100/1000Base-T(X) and 2x100/1000Base-X, SFP socket				
Packing Lis • IGS-1082GF • Wall-mount • Quick Instal • DNN Dail/Kit	2 x 1 t Kit x 2 lation Guide x 1	• SFP10 • SFP 10	al Accessories (Can be purchased se 0 series : 100Mbps SFP optical transceiver 5 series : 1Gbps SFP optical transceiver SDR/DRP 48/24V Series Din rail power supply	parately)			

• DIN-Rail Kit x 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ORing: IGS-1082GP