

LOCTITE® AA 3105™

Known as LOCTITE® 3105™
January 2015

PRODUCT DESCRIPTION

LOCTITE® AA 3105™ provides the following product characteristics:

Technology	Acrylic
Chemical Type	Acrylated urethane
Appearance (uncured)	Transparent liquid ^{LMS}
Components	One component - requires no mixing
Viscosity	Low
Cure	Ultraviolet (UV)/ visible light
Cure Benefit	Production - high speed curing
Application	Bonding
Flexibility	Enhances load bearing & shock absorbing characteristics of the bond area.

LOCTITE® AA 3105™ is primarily designed for bonding rigid or flexible PVC to polycarbonate. These characteristics enable easy assembly of components with close fitting tolerances (i.e. joining polycarbonate to flexible PVC tubing). The product has shown excellent adhesion to a wide variety of substrates including glass, many plastics and most metals.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific Gravity @ 25 °C	1.1
Refractive Index, ASTM D542	1.48
Flash Point - See SDS	
Viscosity, Brookfield - RVT, 25 °C, mPa·s (cP): Spindle 1, speed 20 rpm,	200 to 400 ^{LMS}

TYPICAL CURING PERFORMANCE

LOCTITE® AA 3105™ can be cured by exposure to UV and/or visible light of sufficient intensity. Surface cure is enhanced by exposure to UV light in the 220 to 260 nm range. Cure rate and ultimate depth of cure depend on light intensity, spectral distribution of the light source, exposure time and light transmittance of the substrate through which the light must pass.

Stress Cracking

Liquid adhesive is applied to a polycarbonate bar 6.4 cm by 13 mm by 3 mm which is then flexed to induce a known stress level.

Stress Cracking, ASTM D 3929, minutes:

7 N/mm ² stress on bar	>15
12 N/mm ² stress on bar	3 to 4

Fixture Time

UV fixture time is defined as the light exposure time required to develop a shear strength of 0.1 N/mm².

UV Fixture Time, Polycarbonate to PVC, seconds:

Zeta® 7400 light source, Metal Halide bulb (Indium):	
30 mW/cm ² , measured @ 400 nm	<5
50 mW/cm ² , measured @ 400 nm	<5

Electrodeless system, V bulb:	
50 mW/cm ² , measured @ 400 nm	<5

Electrodeless system, H bulb:	
50 mW/cm ² , measured @ 365 nm,	<5

Electrodeless system, D bulb:	
50 mW/cm ² , measured @ 365 nm,	<5

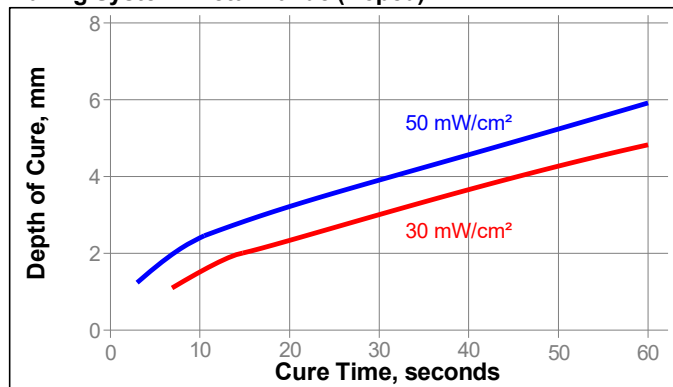
UV Fixture Time, Glass microscope slides, seconds:

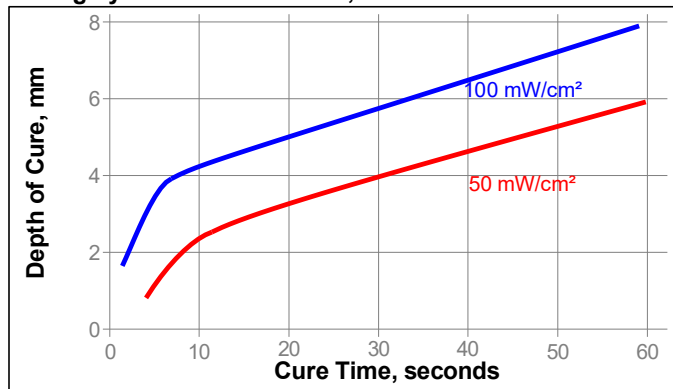
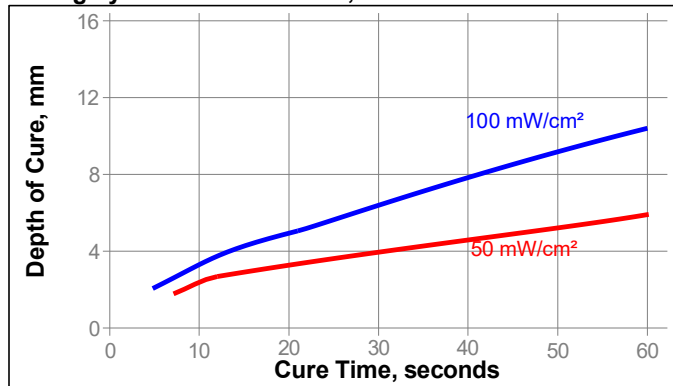
Black light, Zeta® 7500:	
6 mW/cm ² , measured @ 365 nm,	≤15 ^{LMS}

Depth of Cure

Cure depth depends both on external factors including the type of light source, light intensity and exposure time and on internal factors including composition of the adhesive. The following graph shows the effect of light source, light intensity and exposure time on depth of cure for LOCTITE® AA 3105™.

Curing System: Metal Halide (Doped)



Curing System: Electrodeless, D bulb**Curing System: Electrodeless, H bulb****TYPICAL PROPERTIES OF CURED MATERIAL**

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a metal halide light source

Physical Properties:

Shore Hardness, ISO 868, Durometer D	64
Refractive Index, ASTM D542	1.51
Water Absorption, ISO 62, %:	
2 hours in boiling water	5.36
Elongation, at break, ISO 527-3, %	265
Tensile Strength, at break, ISO 527-3	N/mm² 22.7 (psi) (3,300)
Tensile Modulus, ISO 527-3	N/mm² 669 (psi) (97,000)

Electrical Properties:

Volume Resistivity, IEC 60093, Ω·cm	8.4×10 ¹⁴
Surface Resistivity, IEC 60093, Ω	1.0×10 ¹⁵
Dielectric Breakdown Strength, IEC 60243-1, kV/mm	30
Dielectric Constant/Dissipation Factor	
Open Ended Coaxial Probe	
@5 GHZ	3.12/.052
@10 GHZ	3.05/.046
@20 GHZ	2.97/.041
@30 GHZ	2.94/.039
@40 GHZ	2.93/.038
@50 GHZ	2.89/.04

TYPICAL PERFORMANCE OF CURED MATERIAL**Adhesive Properties**

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a metal halide light source

Lap Shear Strength, ISO 4587:

Polycarbonate to Aluminum (etched):

Initial	N/mm² 3.9 (psi) (565)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 4.0 (psi) (580)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 3.5 (psi) (515)

Polycarbonate to Aluminum (as received):

Initial	N/mm² 3.6 (psi) (520)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 2.4 (psi) (340)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 1.2 (psi) (170)

Polycarbonate to Steel:

Initial	N/mm² 2.9 (psi) (425)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 3.2 (psi) (460)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 4.1 (psi) (590)

Polycarbonate to Glass:

Initial	N/mm² 4.3 (psi) (625)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 5.1 (psi) (745)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 6.0 (psi) (870)

Polycarbonate to Phenolic:

Initial	N/mm² 5.2 (psi) (760)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 6.7 (psi) (975)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 5.9 (psi) (850)

Polycarbonate to Polycarbonate:

Initial	N/mm² 25.1 (psi) (3,640)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 14.5 (psi) (2,105)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 10.2 (psi) (1,480)

Polycarbonate to Epoxyglass:

Initial	N/mm² 8.3 (psi) (1,210)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 5.5 (psi) (800)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 5.1 (psi) (745)

Polycarbonate to PVC:

Initial	N/mm² 13.0 (psi) (1,880)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm² 11.4 (psi) (1,655)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm² 9.0 (psi) (1,300)

Polycarbonate to ABS:

Initial	N/mm ²	25.6
	(psi)	(3,710)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm ²	10.2
	(psi)	(1,480)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm ²	9.2
	(psi)	(1,340)

Polycarbonate to Acrylic:

Initial	N/mm ²	10.4
	(psi)	(1,515)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm ²	5.5
	(psi)	(795)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm ²	4.1
	(psi)	(590)

Polycarbonate to Nylon:

Initial	N/mm ²	4.1
	(psi)	(595)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm ²	3.5
	(psi)	(515)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm ²	3.3
	(psi)	(480)

Polycarbonate to Polybutylene**Terephthalate (PBT):**

Initial	N/mm ²	7.6
	(psi)	(1,110)
Aged @ 49 °C / condensed humidity for 300 hours	N/mm ²	5.9
	(psi)	(860)
Aged @ 49 °C / condensed humidity for 500 hours	N/mm ²	5.8
	(psi)	(845)

TYPICAL ENVIRONMENTAL RESISTANCE

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a metal halide light source, (samples with 0.5 mm gap)

Heat Aging

Aged at temperature indicated and tested @ 22 °C

Lap Shear Strength, ISO 4587:

Polycarbonate:

% of initial strength retained

Aged @ 71 °C for 170 hours	100
Aged @ 71 °C for 340 hours	100
Aged @ 93 °C for 170 hours	100
Aged @ 93 °C for 340 hours	100

Chemical/Solvent Resistance

Aged under conditions indicated and tested @ 22 °C.

Environment	°C	% of initial strength		
		2 h	24 h	170 h
Boiling water	100	100	-----	-----
Water immersion	49	-----	-----	100
Water immersion	87	-----	-----	65
Isopropanol	22	-----	100	-----
Heat/humidity	38	-----	-----	100

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Directions for use:

1. This product is light sensitive; exposure to daylight, UV light and artificial lighting should be kept to a minimum during storage and handling.
2. The product should be dispensed from applicators with black feedlines.
3. For best performance bond surfaces should be clean and free from grease.
4. Cure rate is dependent on lamp intensity, distance from light source, depth of cure needed or bondline gap and light transmittance of the substrate through which the radiation must pass.
5. Cooling should be provided for temperature sensitive substrates such as thermoplastics.
6. Crystalline and semi-crystalline thermoplastics should be checked for risk of stress cracking when exposed to liquid adhesive.
7. Excess adhesive can be wiped away with organic solvent.
8. Bonds should be allowed to cool before subjecting to any service loads.

Loctite Material Specification^{LMS}

LMS dated October 02, 2000. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Quality.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Conversions

(°C x 1.8) + 32 = °F
 kV/mm x 25.4 = V/mil
 mm / 25.4 = inches
 μm / 25.4 = mil
 N x 0.225 = lb
 N/mm x 5.71 = lb/in
 N/mm² x 145 = psi
 MPa x 145 = psi
 N·m x 8.851 = lb·in
 N·m x 0.738 = lb·ft
 N·mm x 0.142 = oz·in
 mPa·s = cP

Note:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our

knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 1.1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Loctite:](#)

[230367](#)