





CITEL

UL497B LISTED - I_{max} 20kA - I_n 5kA - Modular

DLC-48D3



- Hybrid SAD-GDT Technology
- Compact 6mm module
- UL497B LISTED
- 10kA I_{max} (1x 8/20us)
- 2.5kA I_{imp} (2x 10/350us)
- 5kA I_n (10x 8/20us)
- 2W+SHIELD+G
- Common/Differential mode protection

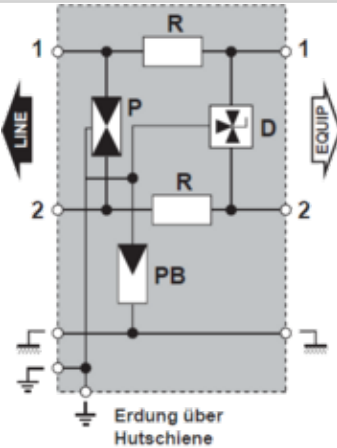

P : 3-poliger Gasableiter
Pb : 2-poliger Gasableiter
R : Widerstand oder Spule
D : Diode

G: 3-electrode gas tube
Gb: 2-electrode gas tube
R: Resistor
D: Clamping diode

Electrical Characteristics

Max. DC operating voltage	U _c	53 Vdc
Insertion loss		< 1 dB
Max. load current @25°C	I _L	300 mA
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	2.5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	I _n L/PE	5 kA
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	48
WIRES		2W+Shield+G
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	20
MCOV	(V)	8/72/72
I _N 10 impulses 8/20µs	(kA)	5
I _{MAX} 8/20µs	(kA)	10
I _{imp} 10/350µs	(kA)	2.5
DATA SPEED	(Mbps)	up to 10MHz
FREQUENCY	(MHz)	up to 10
INSERTION LOSS (@ FREQ)	(db)	< 1

Mechanical Characteristics

Connection to Network		By spring - max. cross section 1.5mm ²
Weight		0.029 kg
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 pair
CONNECTION METHOD		Screw Terminal
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs

Standards

Certification		UL 497B
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS

Part number

641104



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Citel:](#)

[DLC-48D3](#)