

1N4007GP-HF


Voltage: 1000 V
Current: 1.0 A
RoHS Device
Halogen Free

Features

- * High reliability
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * Glass passivated junction

Mechanical data

- * Case: Molded plastic
- * Epoxy: Device has UL flammability classification 94V-O
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.33 gram

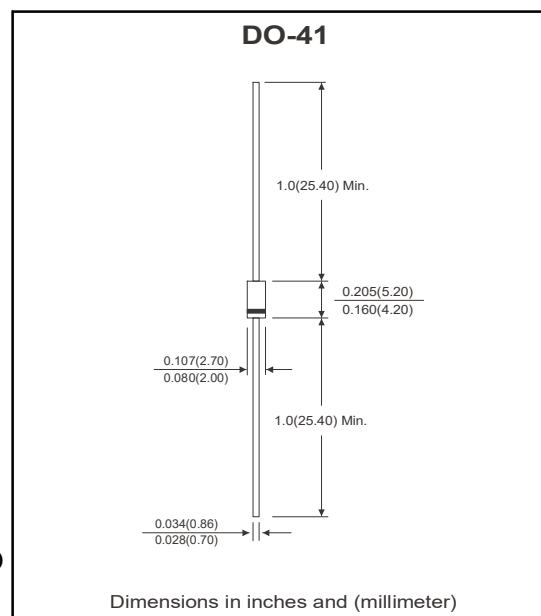

Circuit diagram



Maximum Ratings and Electrical Characteristics (at Ta=25°C unless otherwise noted)

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load derate current by 20%.

Parameter	Conditions	Symbol	Value	Unit
Maximum recurrent peak reverse voltage		V_{RRM}	1000	V
Maximum RMS voltage		V_{RMS}	700	V
Maximum DC blocking voltage		V_{DC}	1000	V
Maximum average forward rectified current	see figure 1	$I_{(AV)}$	1	A
Peak forward surge current	8.3ms single half sine-wave superimposed on rated load	I_{FSM}	30	A
Maximum instantaneous forward voltage	@ $I_F = 1A$	V_F	1.0	V
Maximum DC reverse current at rated DC blocking voltage	$T_J = 25^\circ C$	I_R	0.2	μA
	$T_J = 150^\circ C$		400	
Typical junction Capacitance	$V_R = 4V, f = 1MHz$	C_J	15	pF
Typical thermal resistance	Junction to ambient	$R_{\theta JA}$	50	$^\circ C/W$
Operating junction temperature range		T_J	-65 ~ +175	$^\circ C$
Storage temperature range		T_{STG}	-65 ~ +175	$^\circ C$

NOTES : Measured at 1 MHz and applied reverse voltage of 4.0 volts

Company reserves the right to improve product design , functions and reliability without notice.

REV:B

Rating and Characteristic Curves (1N4007GP-HF)

Fig.1 - Forward Current Derating Curve

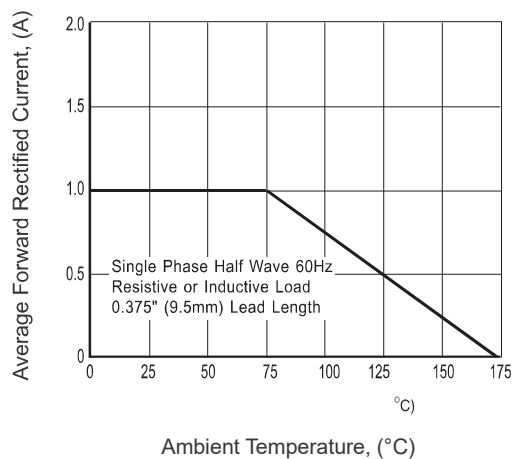


Fig.2 - Max. Non-Repetitive Peak Forward Surge Current

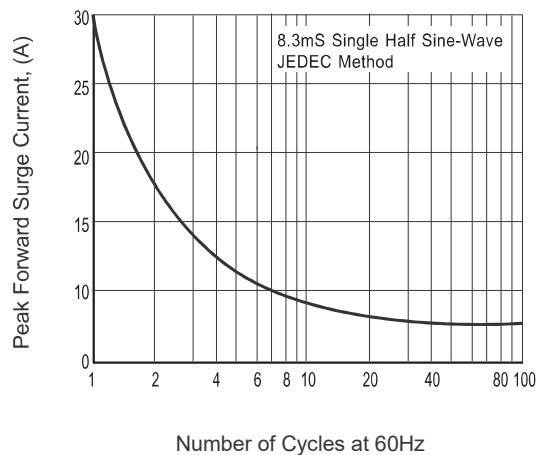


Fig.3 - Typical Instantaneous Forward Characteristics

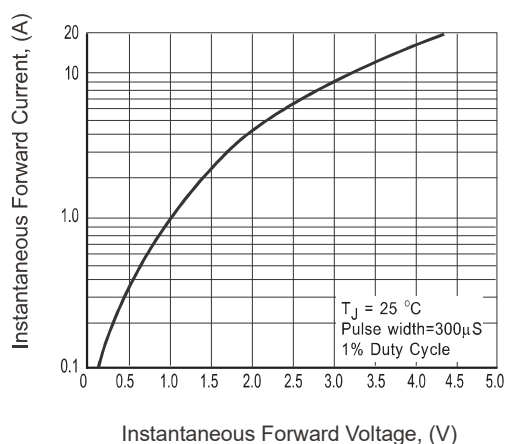


Fig.4 - Typical Reverse Characteristics



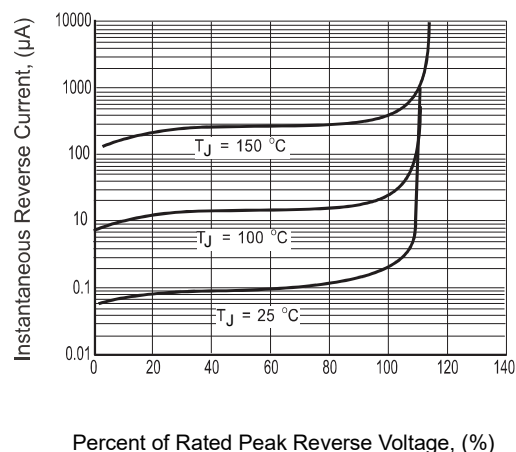


Fig.5 - Typical Junction Capacitance

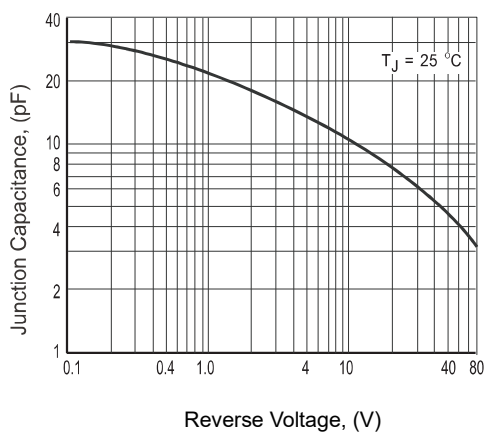

Taping Specification For Axial Lead Diodes

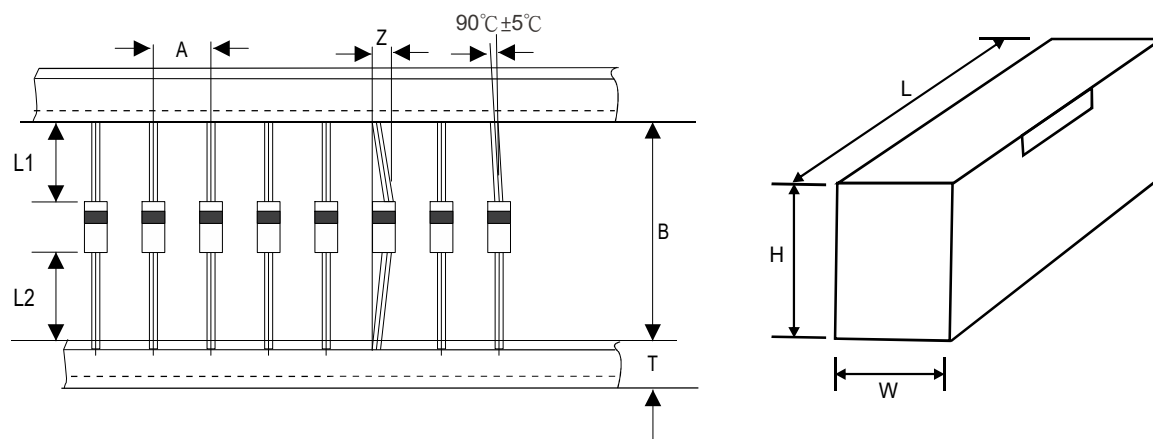

DO-41	SYMBOL	A	B	Z	T	L1	L2
	(mm)	5.00 ± 0.50	52.00 ± 0.50	1.20 (max)	6.00 ± 0.40	1.00 (max)	1.00 (max)
	(inch)	0.197 ± 0.020	2.047 ± 0.020	0.047 (max)	0.236 ± 0.016	0.039 (max)	0.039 (max)

DO-41	SYMBOL	L	W	H			
	(mm)	255.00 ± 10.00	73.00 ± 10.00	100.00 ± 10.00			
	(inch)	10.036 ± 0.394	2.874 ± 0.394	3.937 ± 0.394			

Marking Code

Part Number	Marking Code
1N4007GP-HF	1N4007G



Control Code

1N4007G = Product type marking code

Standard Packaging

Case Type	AMMO PACK
	BOX (pcs)
DO-41	3,000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[1N4007GP-HF](#)