


CDBHM120L-G Thru. CDBHM1100L-G

Reverse Voltage: 20 to 100 Volts

Forward Current: 1.0 Amp

RoHS Device




Features

- High surge forward current capability.
- Low Forward voltage drop.
- General purpose 1 phase Bridge rectifier applications
- UL recognized file # E230084 

Mechanical data

- Case: molded plastic
- Epoxy: UL 94V-0 rate flame retardant.
- Lead: solder plated
- Polarity: As marked
- Weight: 0.125 gram(approx)

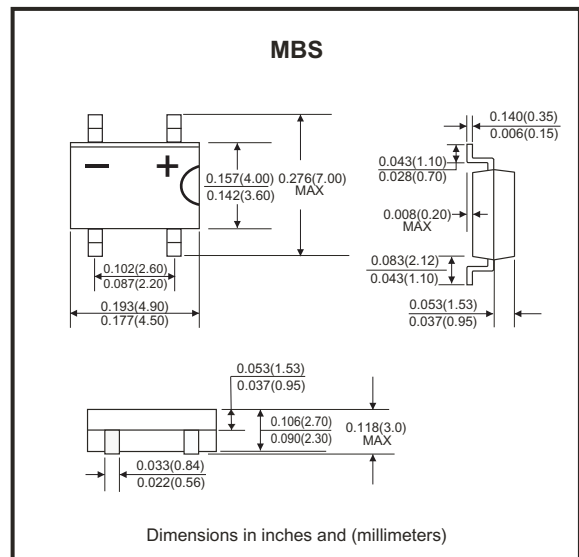

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	Conditions	CDBHM-G					Units
			120L	140L	160L	180L	1100L	
Max. Repetitive peak reverse voltage	V _{RRM}		20	40	60	80	100	V
Max. DC blocking voltage	V _{DC}		20	40	60	80	100	V
Max. RMS voltage	V _{RMS}		14	28	42	56	70	V
Average rectified output current @60Hz sine wave, R-load, T _A =25°C	I _o	On alumina substrate	1.0					A
		On glass-epoxi substrate	0.8					
Peak forward surge current,8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}		40					A
Max. Peak forward voltage	V _{FM}	I _{FM} =0.5A	0.55		0.65	0.85		V
Max. Peak reverse current	I _{RRM}	V _{RM} =V _{RRM}	0.5					mA
Max. Current Squared Time	I ² t	1ms≤t<8.3ms T _A =25°C	6.6					A ² S
Max. Thermal resistance	R _{θJA} ⁽¹⁾	On alumina substrate	76					°C/W
		On glass-epoxi substrate	134					
	R _{θJL}	Between junction and lead	20					
Operating temperature range	T _J		-55 to +150					°C
Sorage temperature range	T _{STG}		-55 to +150					°C

Notes: 1. Between junction and ambient

Company reserves the right to improve product design , functions and reliability without notice.

REV: E

Rating and Characteristics Curves (CDBHM120L-G Thru. CDBHM1100L-G)

Fig.1 - Forward Current Derating Curve

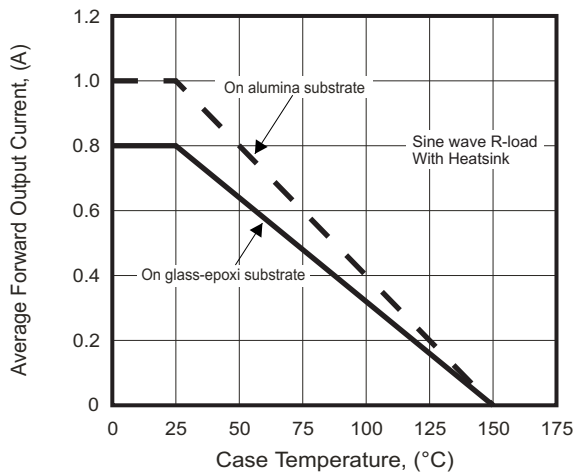


Fig.2 - Typical Forward Characteristics

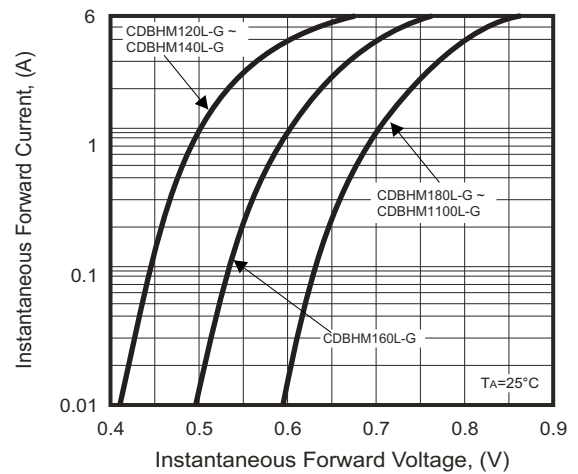


Fig.3 - Maximum Non-Repetitive Surge Current



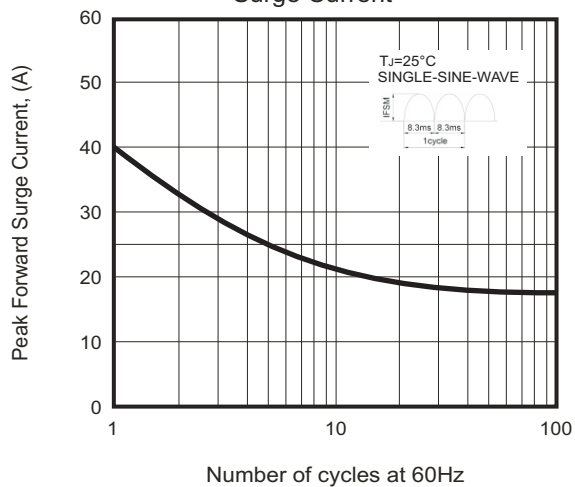


Fig.4 - Typical Reverse Characteristics

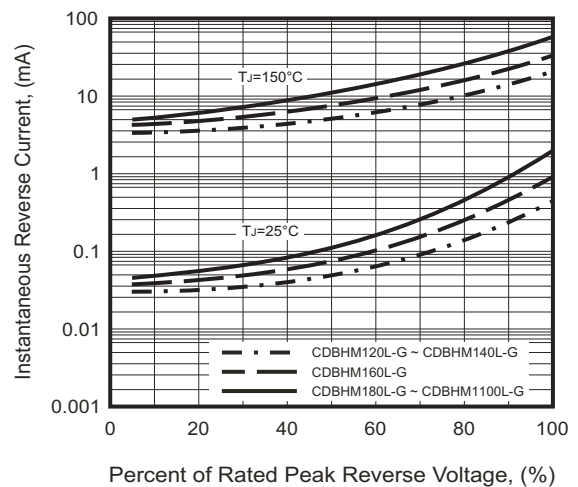

Reel Taping Specification

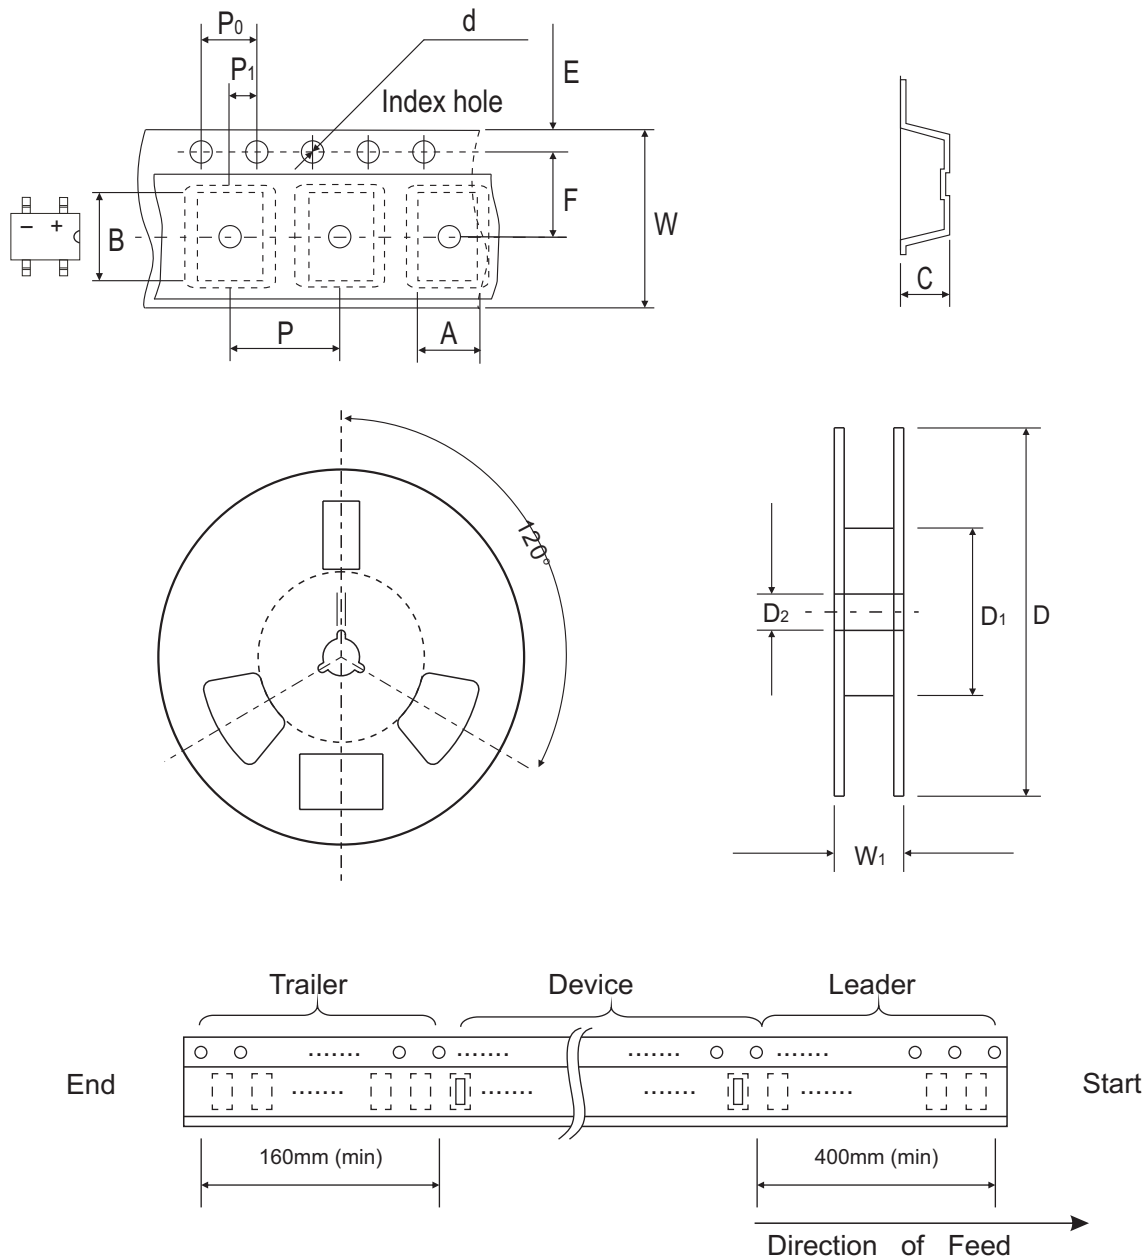

MBS	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	5.00 ± 0.10	7.24 ± 0.10	2.95 ± 0.10	1.55 ± 0.05	330.0 ± 2.00	50.0 Min.	13.0 ± 0.50
	(inch)	0.197 ± 0.004	0.285 ± 0.004	0.116 ± 0.004	0.061 ± 0.002	13.00 ± 0.079	1.969 Min.	0.512 ± 0.020


MBS	SYMBOL	E	F	P	P_0	P_1	W	W_1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	12.00 ± 0.30	18.70 Max.
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.472 ± 0.012	0.736 Max.

Company reserves the right to improve product design , functions and reliability without notice.

REV: E
Page 3

Marking Code


Part Number	Marking Code
CDBHM120L-G	MBSK12SE
CDBHM140L-G	MBSK14SE
CDBHM160L-G	MBSK16SE
CDBHM180L-G	MBSK18SE
CDBHM1100L-G	MBSK110SE



xx/xxx = Product type marking code

Suggested PAD Layout

SIZE	MBS	
	(mm)	(inch)
A	1.20	0.047
B	1.84	0.072
C	2.40	0.094
D	6.00	0.236

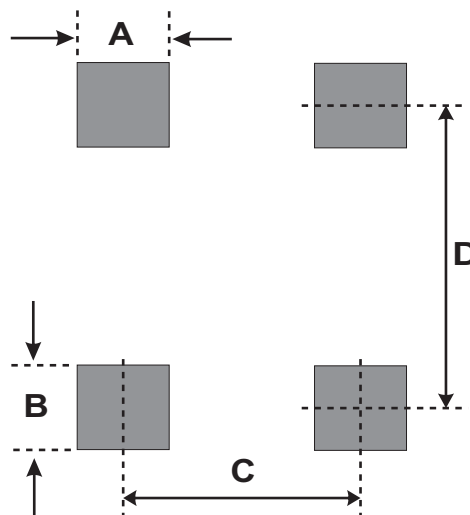

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
MBS	2,500	13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[CDBHM1100L-G](#) [CDBHM140L-G](#) [CDBHM180L-G](#) [CDBHM120L-G](#) [CDBHM160L-G](#)