


CDSH3-222N-G/222P-G

Reverse Voltage: 80 Volts
Power Dissipation: 150 mW
RoHS Device




Features

- Design for mounting on small surface.
- High speed switching.
- High mounting capability, strong surge withstand, high reliability.


Mechanical data

- Case: SOT-523, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Approx. weight: 0.002 grams


Circuit diagram



CDSH3-222N-G



CDSH3-222P-G

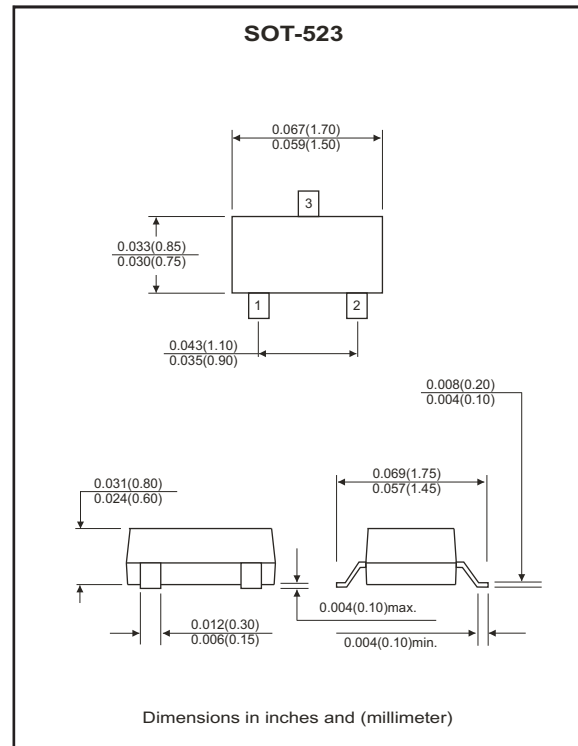

Maximum Ratings and Electrical Characteristics

(at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Units
Repetitive peak reverse voltage	V_{RRM}		80	V
Reverse voltage	V_R		80	V
Peak forward current	I_F		300	mA
Peak surge forward current	I_{FSM}	T=1.0 sec	4	A
Power dissipation	P_D		150	mW
Maximum forward voltage	V_F	@ $I_F=100mA$	1.2	V
Maximum reverse current	I_R	@ $V_R=70V$	0.1	μA
Maximum reverse recovery time	T_{rr}	$I_F=I_R=5mA$, $R_L=100\Omega$	4	nS
Maximum diode capacitance	C_J	$V_R=6V$, $f=1.0MHz$	3.5	pF
Maximum junction temperature	T_J		150	°C
Storage temperature	T_{STG}		-55 to +150	°C

RATING AND CHARACTERISTIC CURVES (CDSH3-222N-G/222P-G)

Fig.1 - Forward Characteristics
(P type)

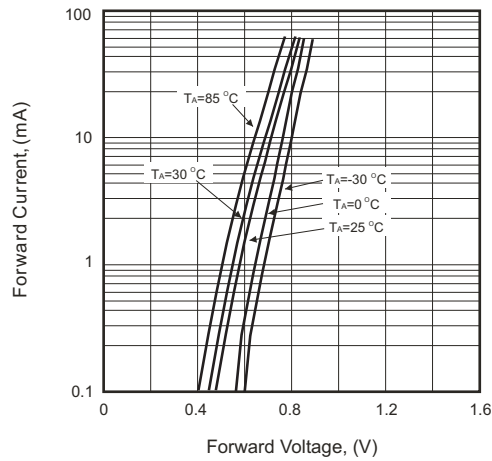


Fig.2 - Reverse Characteristics
(P type)

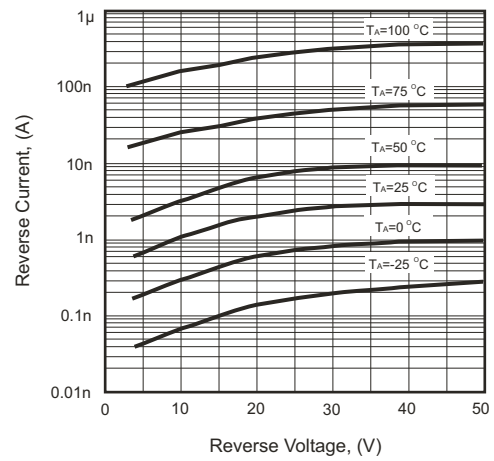


Fig.3 - Forward Characteristics
(N type)

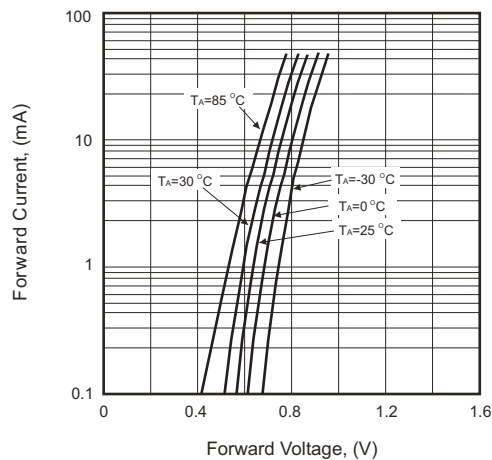


Fig.4 - Reverse Characteristics
(N type)

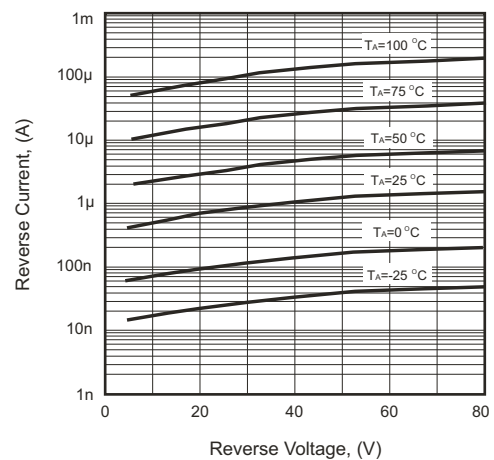


Fig.5 - Capacitance Between Terminals
Characteristics


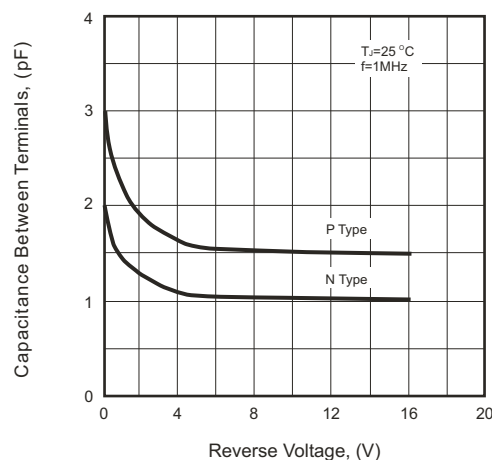


Fig.6 - Power Derating Curve

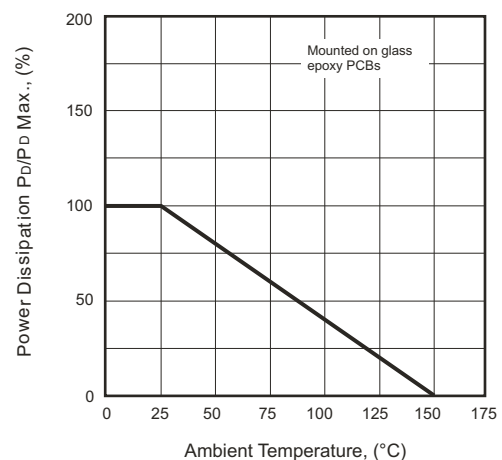

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[CDSH3-222P-G](#)