

## DIO2114B

### 2-Vrms Audio Driver with Adjustable Gain

#### Features

- Voltage Output at 10k $\Omega$  Load  
2Vrms With 3.3V Supply Voltage
- Ultra Low Distortion:  
SNR>100dB  
Typical  $V_n$ <10 $\mu$ Vrms  
THD+N<0.001% at 2Vrms
- No Pop/Clicks Noise when Power ON/OFF
- No Need for Output DC-Blocking Capacitors
- Optimized Frequency Response between  
20Hz–20kHz
- Accepting Differential Input
- HBM ESD protection: Output pin 8kV  
and other pins 5kV
- Available in TSSOP-14 and MSOP-10 package

#### Applications

- Set-Top Boxes
- High Definition DVD Players
- Car Entertainment System
- Medical


#### Descriptions

The DIO2114B is an integrated solution for Set-top box and high definition player, and designed to optimize the audio driver circuit performance while reducing the BOM cost by eliminating the peripheral discrete components for noise reduction. DIO2114B features a 2Vrms stereo audio driver that designed to allow for the removal of output AC-coupling capacitors.

Featuring differential input mode, gain range of  $\pm 1V/V$  to  $\pm 10V/V$  can be achieved via external gain resistor setting. The DIO2114B is able to offer 2Vrms output with 10kohm load and 3.3V supply.

Meanwhile, the DIO2114B offers built-in shut-down control circuitry for optimal pop-free performance.

#### Block Diagram

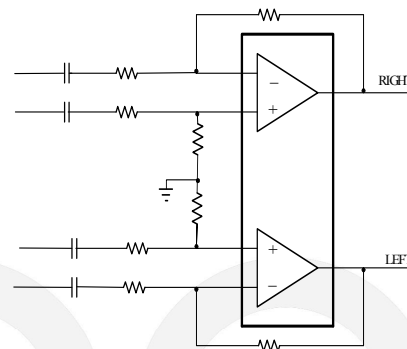

#### Ordering Information

Order Part Number	Top Marking		T <sub>A</sub>	Package	
DIO2114BTP14	DIO2114B	Green/RoHS	-40 to +85°C	TSSOP-14	Tape & Reel, 2500
DIO2114BMP10	DIO2114B	Green/RoHS	-40 to +85°C	MSOP-10	Tape & Reel, 3000



## DIO2114B

2-Vrms Audio Driver with Adjustable Gain

### Pin Assignment

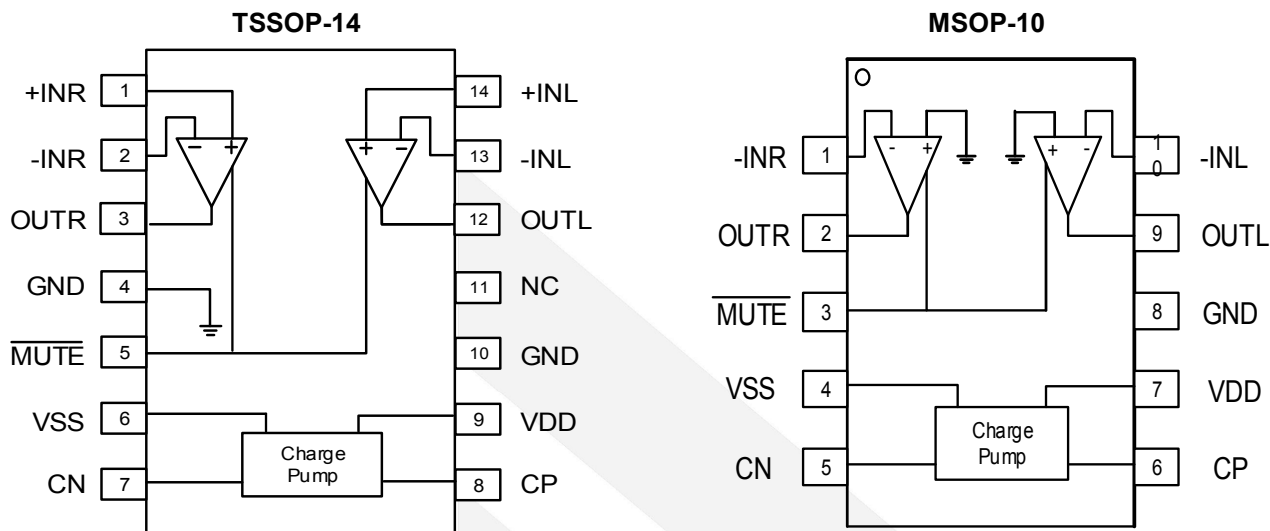


Figure 1 Pin Assignment (Top View)

### Pin Descriptions

PIN Name	I/O	Description
OUTL	O	Left-channel output
+/-INL	I	Left-channel input
+/-INR	I	Right-channel input
OUTR	O	Right-channel output
MUTE	I	Mute input, active-low
VSS	P	Supply voltage output
CN	I/O	Charge-pump flying capacitor negative terminal
CP	I/O	Charge-pump flying capacitor positive terminal
VDD	P	Positive supply
GND	P	Ground
NC		No connect



## DIO2114B

### Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter		Rating	Unit
Supply Voltage		-0.3 to 4	V
Input Voltage		$V_{SS}-0.3$ to $V_{DD}+0.3$	V
Minimum load impedance		600	$\Omega$
Mute to GND		-0.3 to $V_{DD}+0.3$	V
Storage Temperature Range		-65 to 150	$^{\circ}\text{C}$
Junction Temperature		150	$^{\circ}\text{C}$
HBM ESD JEDEC: JESD22-A114	Output Pins	8	kV
	All Pins	5	

### Recommend Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended Operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not Recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Typ.	Max.	Unit
$V_{DD}$	Supply Voltage	3	3.3	3.6	V
$V_{IH}$	Mute High level Input Voltage		60		% of $V_{DD}$
$V_{IL}$	Mute Low level Input Voltage		40		% of $V_{DD}$
$T_A$	Operating Temperature Range	-40		85	$^{\circ}\text{C}$



## DIO2114B

### 2-Vrms Audio Driver with Adjustable Gain

### Electrical Characteristics

Typical value:  $T_A = 25^{\circ}\text{C}$ , unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_{OS}$	Output Offset Voltage	$V_{DD}=3.3\text{V}$ , Input grounded, Unity gain		0.9		mV
PSRR	Power supply rejection ratio	$V_{DD}=3.3\text{V}$		90		dB
$V_{OH}$	High level output voltage	$V_{DD}=3.3\text{V}$ , $R_L=10\text{k}\Omega$	3.1			V
$V_{OL}$	Low level output voltage	$V_{DD}=3.3\text{V}$ , $R_L=10\text{k}\Omega$			-3.05	V
$I_{IH}$	Mute High level input current	$V_{DD}=3.3\text{V}$ , $V_I=V_{DD}$			1	$\mu\text{A}$
$I_{IL}$	Mute Low level input current	$V_{DD}=3.3\text{V}$ , $V_I=0\text{V}$			1	$\mu\text{A}$
$I_{DD}$	Supply current	$V_{DD}=3.3\text{V}$ , $V_I=V_{DD}$ , No load		14		mA
		Mute mode, $V_{DD}=3.3\text{V}$		0.8		

### Operating Characteristics


Typical value:  $T_A=25^{\circ}\text{C}$ , unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	THD=1%, $V_{DD}=3.3\text{V}$ , $f=1\text{kHz}$	2.0	2.3		$V_{RMS}$
THD+N	Total harmonic distortion + noise	$V_O=2V_{RMS}$ , $f=1\text{kHz}$		0.0005		%
$X_{TALK}$	Channel crosstalk	$V_O=2V_{RMS}$ , $f=1\text{kHz}$		-105		dB
SNR	Signal noise ratio	$V_O=2V_{RMS}$ , BW=22kHz A-weighted	90	105		dB
$C_L$	Maximum capacitive load			220		pF
$V_N$	Noise output voltage	BW=20Hz to 22kHz		10		$\mu V_{RMS}$
$G_{BW}$	Unity gain bandwidth			6.5		MHz
$A_{VO}$	Open loop voltage gain			165		dB
$f_{CP}$	Charge pump frequency			300		kHz




## DIO2114B

### Application Circuit

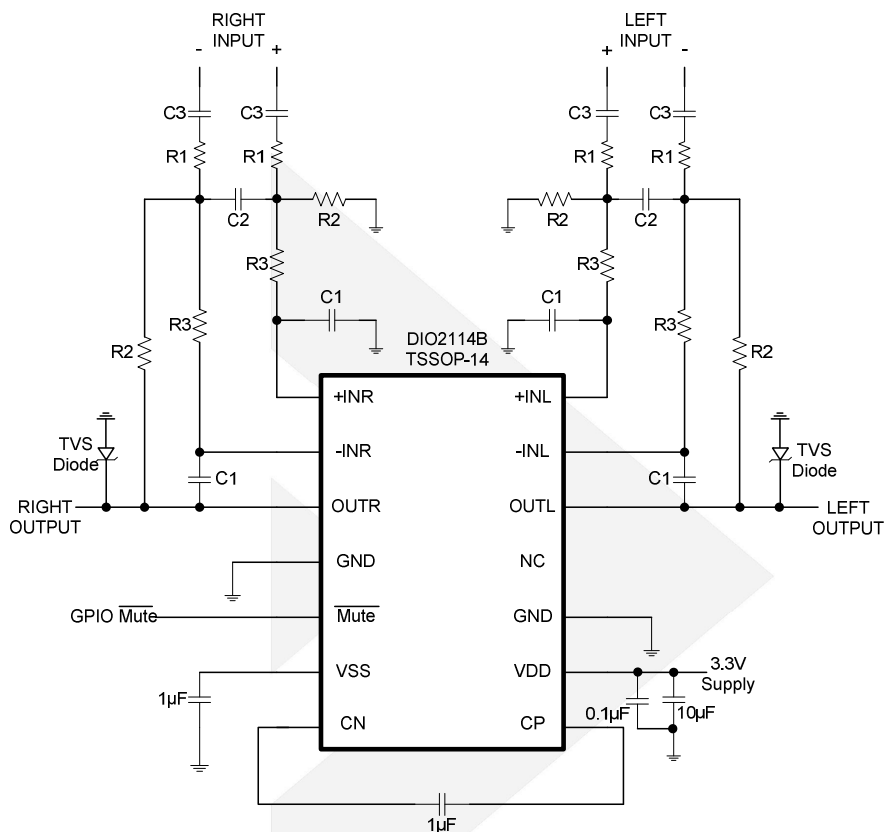

Differential-input, single-ended output, second-order filter  
 $R1=15k\Omega$ ,  $R2=30k\Omega$ ,  $R3=47k\Omega$ ,  $C1=33pF$ ,  $C2=150pF$ ,  $C3=6.8\mu F$

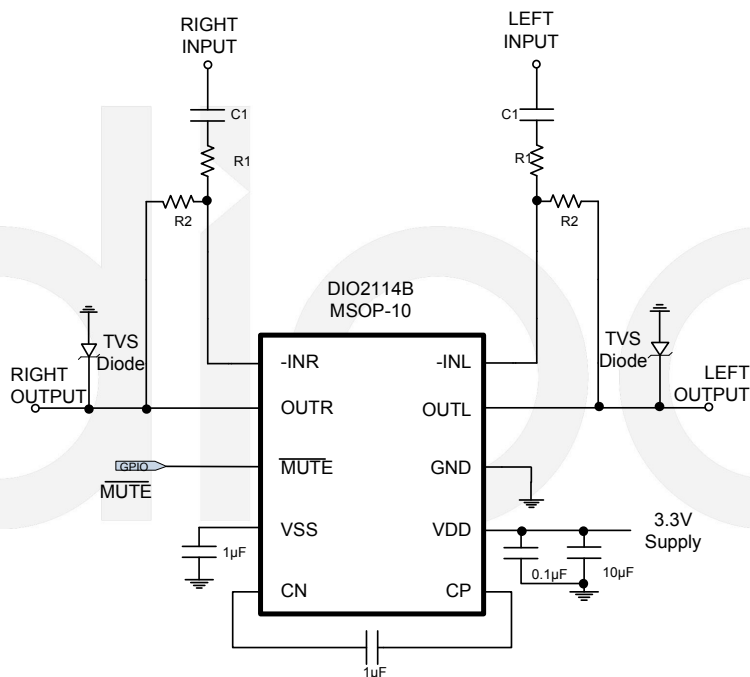

$R1=15k\Omega$ ,  $R2=30k\Omega$ ,  $C1=6.8\mu F$


2-Vrms Audio Driver with Adjustable Gain

## Important Note:

1. In some applications, if the power supply noise needs to be filtered, the ferrite bead is recommended in a value of 600ohm@100MHz, instead of RC network. RC network normally will lower the power supply resulting in the degraded the audio performance. If the resistor is not chosen properly, which can trigger the internal UVP detection circuit and mute the output. As depicted below.



2. In order to protect the device against the power surge, transient voltage suppressor (TVS) devices are recommended at the output pins OUTL/OUTR

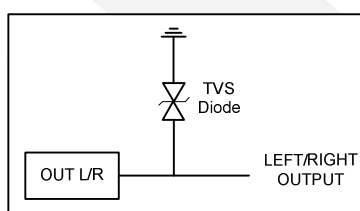

## Application Notes

### Gain-Setting Resistors Ranges and Input-Blocking Capacitors


The gain-setting resistors,  $R_{IN}$  and  $R_{FB}$ , must be chosen so that noise, stability, and input capacitor size of the DIO2114B are kept within acceptable limits. Voltage gain is defined as  $R_{FB}$  divided by  $R_{IN}$ .

Table 1 lists the recommended resistor value for different gain settings. Selecting values that are too low demands a large input ac-coupling capacitor  $C_{IN}$ . Selecting values that are too high increases the noise of the amplifier.

The gain-setting resistor must be placed close to the input pins to minimize capacitive loading on these input pins and to ensure maximum stability.

**Table 1 Resistor Values Recommended**

Input Res./ $R_{IN}$	Feedback Res./ $R_{fb}$	Differential Gain	Inverting Gain	Non-inverting Gain
22 k $\Omega$	22 k $\Omega$	1 V/V	-1 V/V	2 V/V
15 k $\Omega$	30 k $\Omega$	2 V/V	-2 V/V	3 V/V
10 k $\Omega$	100 k $\Omega$	10 V/V	-10 V/V	11 V/V

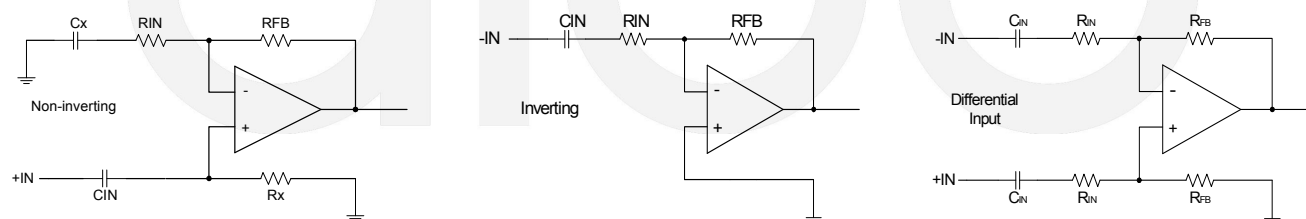

**Figure 2 Differential, Inverting and Non-inverting Gain Configurations**


DC input-blocking capacitors are required to be added in series with the audio signal into the input pins of the DIO2114B. These capacitors block the dc portion of the audio source and allow the DIO2114B inputs to be properly biased to provide maximum performance.

### 2nd Order Filter Typical Application

Several audio DACs used today require an external low-pass filter to remove out-of-band noise. This is possible with the DIO2114B, as it can be used like a standard OPAMP. Several filter topologies can be implemented, both single-ended and differential. In Figure 3, a multi-feedback (MFB) with differential input and single-ended input is shown.

An ac-coupling capacitor to remove dc content from the source is shown; it serves to block any dc content from the source and lowers the dc-gain to 1, helping reducing the output dc-offset to minimum.

The resistor values should have a low value for obtaining low noise, but should also have a high enough value to get a small size ac-coupling capacitor.

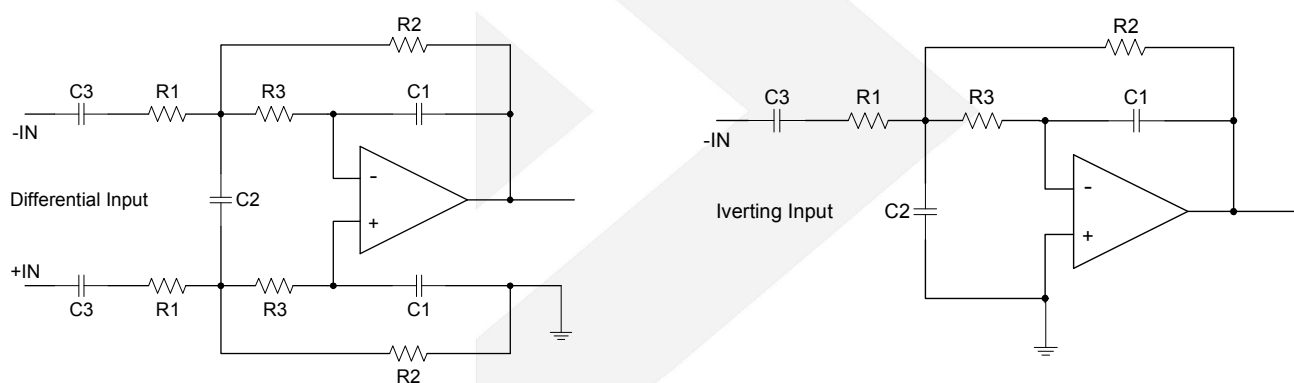

**Figure 3 Second-Order Active Low-Pass Filter**

### Charge Pump Flying Capacitor and VSS Capacitor

The charge pump flying capacitor serves to transfer charge during the generation of the negative supply voltage. The VSS capacitor must be at least equal to the charge pump capacitor in order to allow maximum charge transfer. Low-ESR capacitors are an ideal selection, and a value of 1 $\mu$ F is typical. Capacitor values that are smaller than 1 $\mu$ F can be used, but the maximum output voltage may be reduced and the device may not operate to specifications.


### Decoupling Capacitors

The DIO2114B requires adequate power supply decoupling to ensure that the noise and total harmonic distortion (THD) are low. A good low equivalent-series-resistance (ESR) ceramic capacitor, typically 1 $\mu$ F, placed as close as possible to the device VDD lead works best. Placing this decoupling capacitor close to the DIO2114B is important for the performance of the amplifier. For filtering lower-frequency noise signals, a 10 $\mu$ F or greater capacitor placed near the audio power amplifier would also help, but it is not required in most applications because of the high PSRR of this device.

### Pop-Free Power-Up

Pop-free power up is ensured by keeping the Mute (shutdown pin) low during power-supply ramp up and ramp down. The Mute pin should be kept low until the input ac-coupling capacitors are fully charged before asserting

the Mute pin high to achieve pop-less power up. Figure 4 illustrates the preferred sequence.

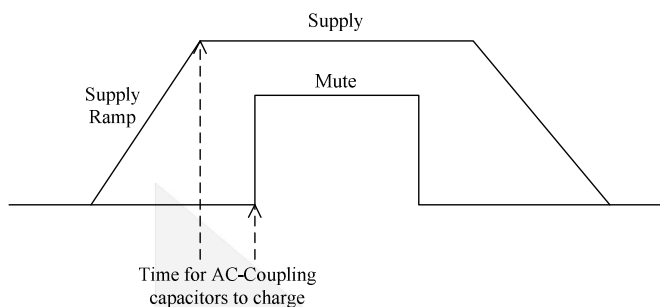

### Capacitive Load

The DIO2114B has the ability to drive a high capacitive load up to 220pF directly. Higher capacitive loads can be accepted by adding a series resistor of 47Ω or larger.



## CONTACT US

**D**ioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

DIOO:

[DIO2114BTP14](#) [DIO2114BMP10](#)