
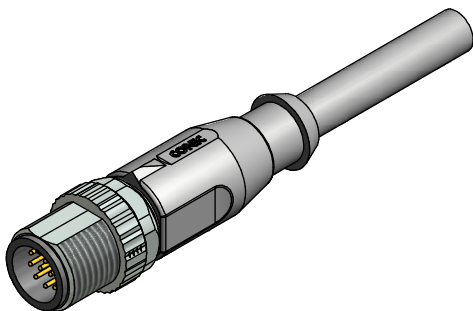
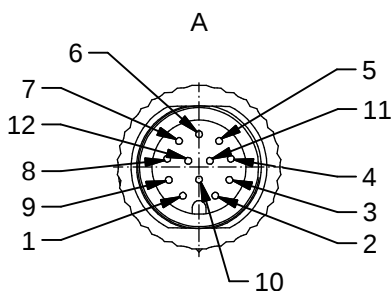


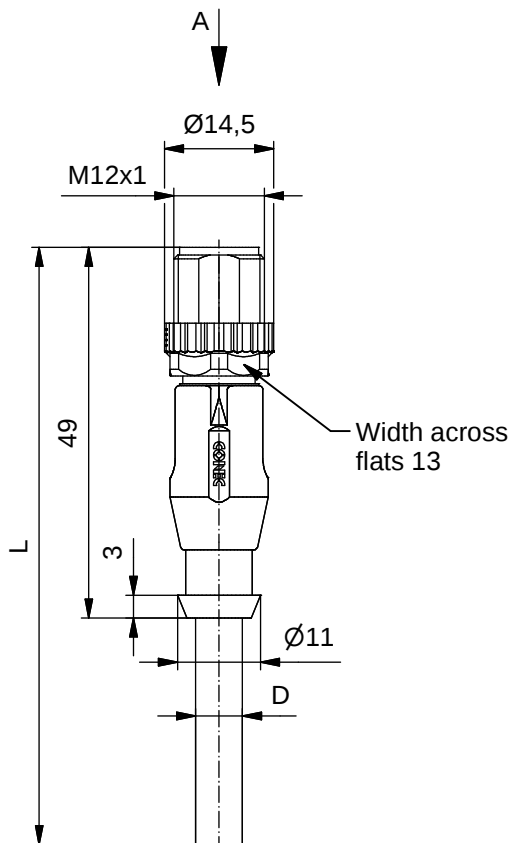

Technical specification :

Rated voltage: IEC 61076-2-101	30 V
Current rating: IEC 61076-2-101	1,5A at 40°C
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range:	-30°C ... +80°C
Mating cycles: IEC 60512-9a	>=100

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	PA, UL 94
Coupling screw:	GD-Zn, nickel plated
Moulding body:	TPU, UL 94, grey

Installation specification:


Recommended torque:	0,6 Nm
Conec installation tool:	Torque wrench: 36-000200 Insert across flats 13: 36-000220

Contact assignment:

1 brown	7 black
2 blue	8 grey
3 white	9 red
4 green	10 violet
5 pink	11 grey-pink
6 yellow	12 red-blue

Part no:	Description:	Length L:	Cable:
43-11272	SAL - 12 - RS12 - 2 / A3	2m	PVC, UL 2464, grey, 12x0,14mm ² Cable: 781-A31120
43-11273	SAL - 12 - RS12 - 3 / A3	3m	
43-11274	SAL - 12 - RS12 - 5 / A3	5m	
43-11275	SAL - 12 - RS12 - 10 / A3	10m	
43-xxxxx	SAL - 12 - RS12 - ... / A3	x	

D see data sheet cable

DO NOT ALTER CAD DRAWING BY HAND Directive 2011/65/EU RoHS compliant	Index c: Ä5369 29.09.14 rbo Data sheet modified		 dim. in mm		title: Male connector M12x1 axial		
			date	name			
	tolerance of cable:	L <= 4m: L + 40mm L > 4m: L + 1%		drawn	12.10.07	Franz	dwg no:
				appd.	12.10.07	Mankopf	
	general tolerance:	0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm					43K1A551
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH							
				part no:		see table	

CONEC®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[43-11275](#) [43-11274](#) [43-11272](#) [43-11273](#)