
Date: 07-16-08



Rotary Encoder 318-ENC130175F-12PS

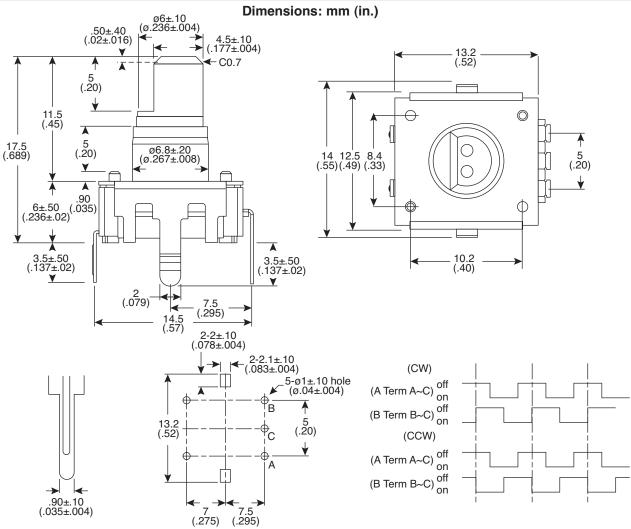

Mechanical Specifications:

- Operating Temp: -10°C to 70°C
- Storage Temp: -40°C to 85°C
- · Rotational Torque: 50gf.cm max.
- No. and Pos. of detents: 12 detents (Step angle 30°±3°)
- Terminal Strength: A static load for 300gf.cm shall be applied to the tip of the terminals for 10 sec. in any direction

Available from Mouser Electronics

- Shaft push-pull strength: 5.1kgf
- Rotational life: 30,000 cycles

Note:

RoHS Compliant

Electrical Specifications:

- Rating: 1mA/10VDC
- Insulation Resistance: 50VDC 10MΩ Min.
- Dielectric Strength: 50VAC for 1 min.
- Resolution: 12 pulses/360° for each phase

Soldering Specifications:

- Soldering: To be performed in 5 seconds within 260±5°C
- Manual Soldering: To be performed in 3 seconds within 350±5°C
- Preheating: The entire flow duration should not exceed 2 min., and soldering surface temperature (undersurface of PCB) shall be settled within 100°C

www.mouser.com

Push-on Switch Specifications:

- Type: Single Pole Single Throw (Push on)
- Rating: 10mA/5VDC
- Switch Travel (mm): 0.5±0.4
- Operating Force: 200~460gf
- Operating Life: 20,000 times

(800) 346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SparkFun Electronics: