


## EMP Protector 3401.01.A

### Description

GDT technology up to 1.0 GHz

#### Benefits

DC continuity for remote powering  
The protector can also be installed reversely  
Delivered without gas discharge tube  
Data refer to GDT 9071.99.0547, 230 V  
Compliant to IEC 61643-21

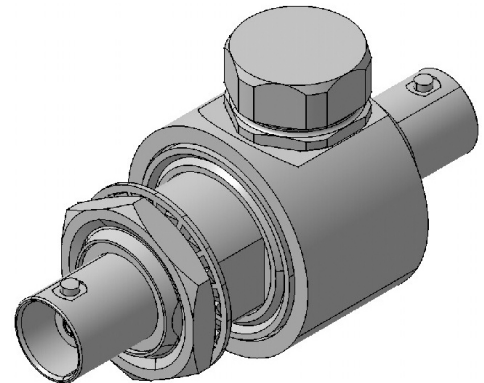

### Product Configuration

Main path connectors	Port 1: <u>unprotected</u> , BNC jack (female) - Port 2: <u>protected</u> , BNC jack (female)
Mounting and grounding	MH12 (bulkhead mounting), brk (bracket)
Side of bulkhead	protected side

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$	
Frequency range	0 - 1000 MHz	0 - 300 MHz
Return loss	$\geq 19$ dB	$\geq 26.44$ dB
Insertion loss	$\leq 0.1$ dB	$\leq 0.1$ dB
RF CW power	$\leq 150$ W	$\leq 150$ W
PIM 3rd order	not specified	

Surge current handling capability	30 single / 20 multiple kA (test pulse 8/20 $\mu$ s)
Residual pulse energy	350 $\mu$ J typically (test pulse 4 kV 1.2/50 $\mu$ s / 2 kA 8/20 $\mu$ s) main path - protected side

#### Mechanical Data

Number of matings	500
Weight	75 g

#### Environmental Data

Operating temperature	-40 °C to +85 °C
Waterproof degree	IP20 (according to IEC 60529, data refer to the coupled state)
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

#### Material Data

Piece Parts	Material	Surface Plating
Housing	Brass	SUCOPLATE (R) Plating
Port 1 center contact	Copper Beryllium Alloy	Gold Plating (without Nickel underplating)
Port 2 center contact	Copper Beryllium Alloy	Gold Plating (without Nickel underplating)

### Related Documents

Outline drawing	DOU-00057120.1
Mounting instruction	DOC-0000176104

### Remarks

Customer part number	NATO: NSN 5920-12-325-4220, 5935-99-110-3099
----------------------	--

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[3401.01.A](#)