


Coaxial PCB Connector 85_QLA-01-0-2/110_N

Description

Right angle PCB jack

Interface Standards

NIM-CAMAC-Standard CD/N549

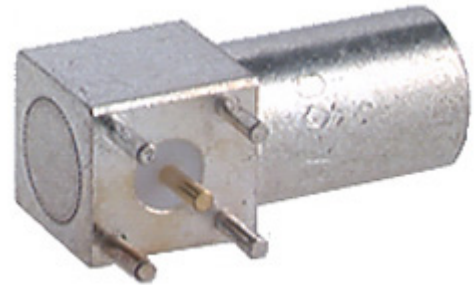

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	1.4 GHz

Mechanical Data

Board mounting type	through holes
Weight	0.0043 kg

Environmental Data

Operating temperature	-55 °C to 150 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Bronze	Gold Plating (Nickel underplated)
Body	Brass	Silver Plating
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00012841
Catalogue drawing	DCA-00012843
Mounting hole	DOU-00012844

Ordering Information

Bulk 100 pcs package	85_QLA-01-0-2/110_NH
----------------------	----------------------

Remarks

PCB connector without stand-offs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HUBER+SUHNER:

85_QLA-01-0-2/110_NH