
## DVI CONVERTER MODULE FOR LVDS conga-LDVI









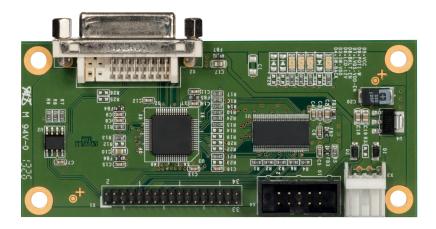

Compact module to convert LVDS to DVI-D. It can be used with either XTXM, COM Express® or Qseven® modules. It's now possible to realize a dual port DVI-D system independent of the typical Video Output Ports (SDVO or DVO).

Max. Resolution	1280×1024 1×24bit		
Input mode	Single channel 24bit LVDS via a standard dual row 34pin 2mm pin header		
Output mode	Single channel DVI-D via a standard DVI-D connector		
Controller	National DS90CF386 LVDS to TTL converter + Texas Instruments TFP410 TTL to DVI encorder		
Power supply	5V power Input via dual row 10pin 2.54mm pin header or optional over a floppy power connector		
Power consumption	max. 250mA		
Size	100 x45 mm <sup>2</sup>		

## conga-LDVI | Order Information

Article	PN	Description
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
cab-LVDV-DATA-34-15	033331	Data cable for conga-LVDI LVDS to DVI adapter, dual row 2mm 34 pin 1mm pitch ribbon cable, lenght15cm
cab-LVDV-PWR-10-15	052147	Power cable for conga-LVDI LVDS to DVI adapter, dual row 2,54mm 10pin IDC receptacle, 10pin 1,27mm pitch ribbon cable, length 15cm

© 2016 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. Oseven is a registered trademark of SGET. These trademark holders are not affiliated with congatec AG. Rev. December 12, 2016 MR



## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## congatec:

cab-LVDV-DAT-34-15 cab-LVDV-PWR-10-15 conga-LDVI/EPI