


Recommended PCB Layout
As viewed from component side Tolerance: ±0.05mm
■ Solder Area □ Component Outline

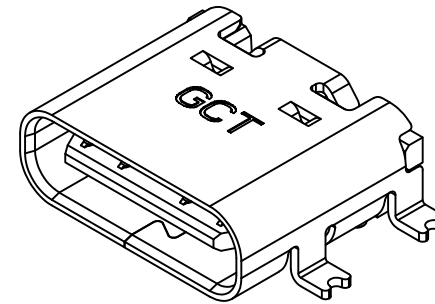

Pin	Signal	Mating Sequence	Pin	Signal	Mating Sequence
A1	GND	First	B12	GND	First
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A12	GND	First	B1	GND	First
SHELL			GND	SHELL	GND

Specifications

Material

Insulator: High Temp. Plastic UL 94V-0, Black
Contact: Copper Alloy
Shell: Stainless steel
Mid Plate: Stainless Steel

Plating

Contact: Gold Flash over 50µ" min. Nickel
Solder Tails: Gold Flash over 50µ" min. Nickel
Shell: 50µ" min. Nickel

Electrical

Current Rating: 5.00A collectively for Vbus pins
6.25A collectively for GND pins
1.25A for A5/B5 pin
0.25A per pin for all other pins

Voltage Rating: 48V DC

Power Rating: 240W

Contact Resistance: 40mΩ max initial.
50mΩ max after test

Dielectric Withstanding Voltage: 100V AC, 1 minute

Insulation Resistance: 100MΩ min





Mechanical & Environmental

Operating Temperature: -40°C to +85°C


Mating Force: 5 to 20 N.

Unmated Force: 6 to 20 N after test

Durability: 20,000 cycles

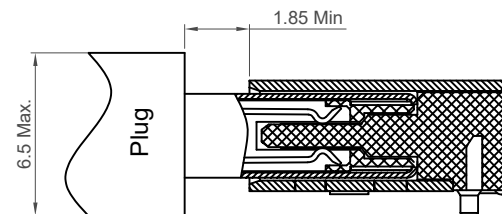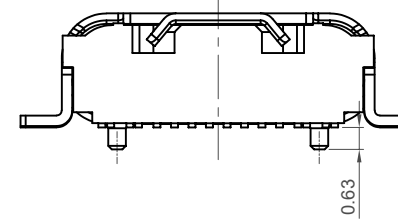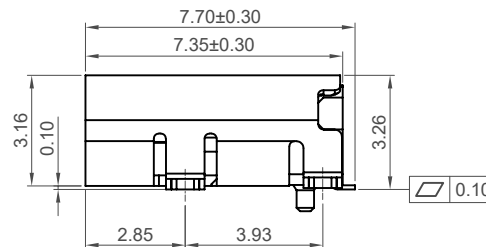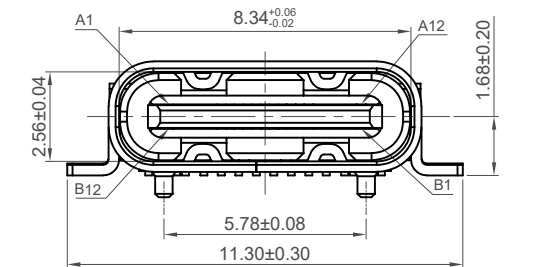

Plug and Receptacle Mating View

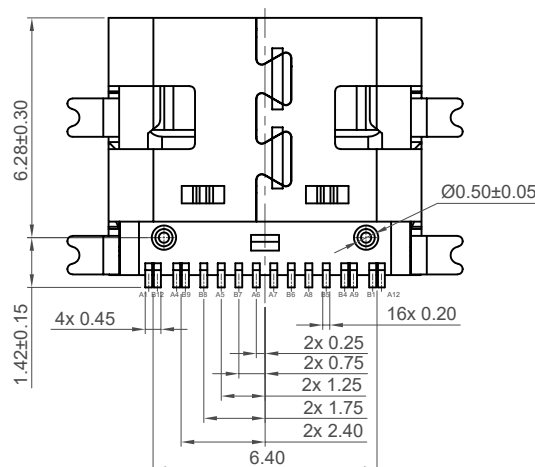




Ordering Grid

USB4110 - **GF** - **A**

Contact Plating
GF = Gold Flash



Request Samples and Quotation

Packing Options
A = Tape & Reel
(1,200 per reel)

Part Number		Product Description	
USB4110		USB Type C Receptacle for USB 2.0	
Drawing Date		SMT Type, PCB Top Mount	
10th July 2019			
By	CC	Tolerances (Except as Noted)	Units:
		Length	Metric (mm)
Detail	USB4110 B PCN	X. ± 0.50	 3rd Angle Projection
Revision	B4	X.X ± 0.30	
Date	22/05/24	X.XX ± 0.20	
		X.XXX ± 0.10	
		± 2°	
			 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

GCT
www.gct.co

H
G
F
E
D
C
B
A

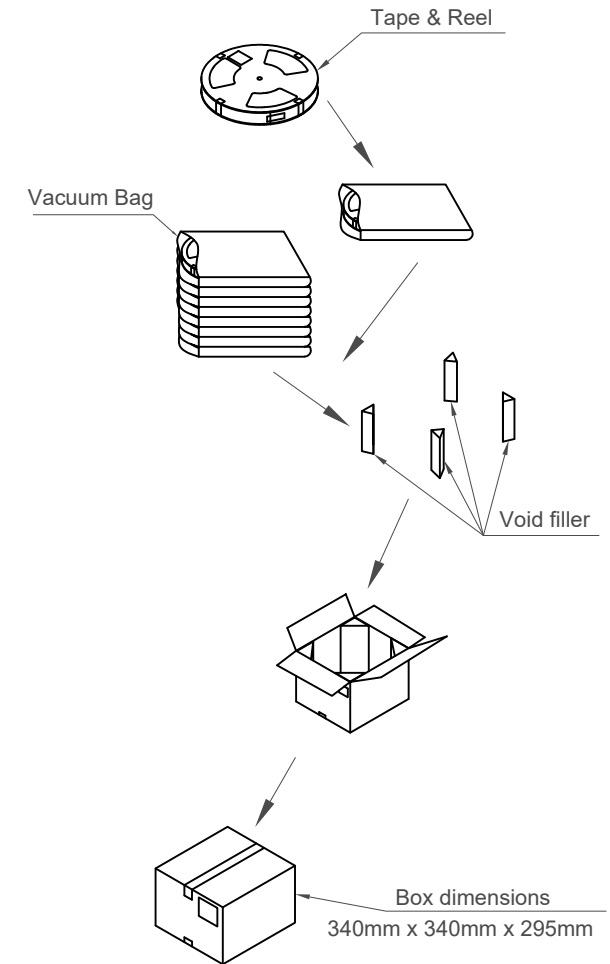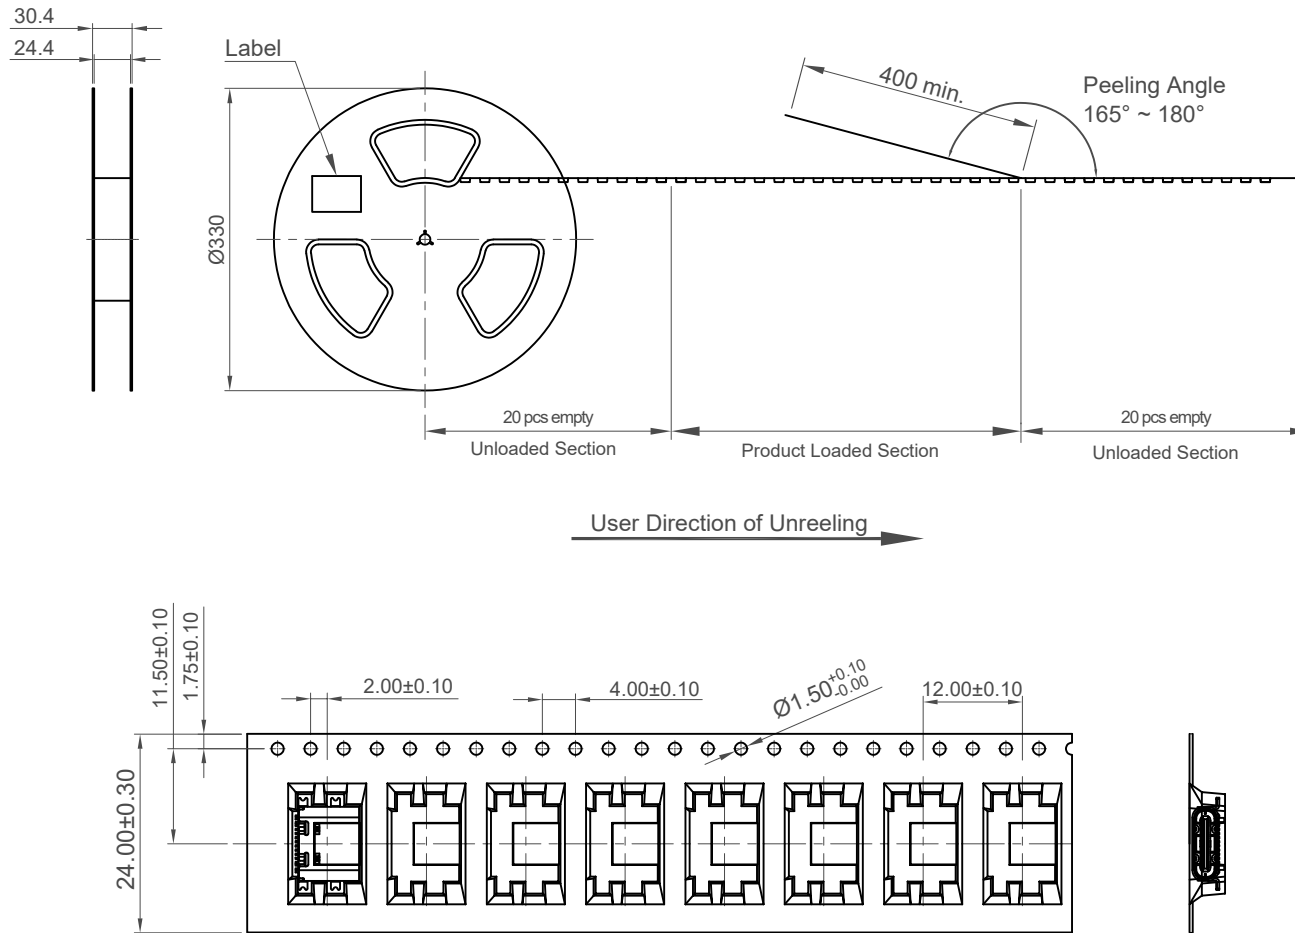

Notes:

Peeling off force of top tape: 0.1-1.3N (Peeling direction as shown)

Materials:

Carrier Tape: Polystyrene (PS)

Top Tape: PE

Reel Tape: Polystyrene (PS)

Bag: PE

Pcs / Reel	Reels / Carton	Total Quality
1200	9	10800 pcs

Part Number		Product Description	
USB4110		USB Type C Receptacle for USB 2.0	
Drawing Date		SMT Type, PCB Top Mount	
10th July 2019			
By	CC	Tolerances (Except as Noted)	Units:
Detail	USB4110 B PCN	Length	Metric (mm)
Revision	B4	Angle	± 2°
Date	22/05/24	X. ± 0.50	
		X.X ± 0.30	
		X.XX ± 0.20	
		X.XXX ± 0.10	
		RoHS COMPLIANT 2011/05/EU	
		This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	
		Not to Scale	
		Drawn By CC	
		Sheet No. 2/2	

GCT
www.gct.co

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GCT:](#)

[USB4110-GF-A](#)