

SL POWER TE60 Family

60 W Single Output External Power



Advanced Energy's SL Power TE60 series of desktop and wall-plug AC-DC external power adapter comprises seven output models. All models feature industrial safety approvals and accept a universal input of 90 to 264 VAC. These compact switch-mode power supplies feature output overvoltage, overtemperature, overload protection, with short-circuit protection on all output models. TE60 series power adapters provide up to 64.8 Watts of output power with IP22 rated enclosure and meets DoE Efficiency Level VI Requirements.

AT A GLANCE

Total Power

Up to 64.8 Watts

Input Voltage

90 to 264 VAC

of Outputs

Single

SPECIAL FEATURES

- Universal Input 90 to 264 VAC
Input Range Desktop and Wall-Plug
Versions
- Up to 64.8 W of AC-DC Power
- IP22 Rated Enclosure*
- Meets EN55011/CISPR11, FCC Part
15.109 Class B Conducted & Radiated
Emissions, with 6db Margin
- Meets "Heavy Industrial" Levels of
EN61000 EMC Requirements
- >8 Years E-Cap Life
- >900,000 Hours MTBF
- 3 Years Warranty
- Meets DoE Efficiency Level VI and EU
CoC Tier 2 Requirements No Load
Input Power Average Efficiency
- RoHS Compliant

SAFETY

- CSA/IEC/EN/UL62368-1



Note: *IP22 does not include interchangeable blade versions.


ELECTRICAL SPECIFICATIONS

Input	
Input range	90 to 264 VAC, 47 to 63 Hz, 1Ø
Input current	1.5 A @ 115 VAC, 0.75 A @ 230 VAC
Inrush current	40 A max., cold start @ 264 VAC input
Input fuses	F1, F2: 2A, 250VAC fuses (line & neutral lines) provided on all models
Earth leakage current	<div>Input to GND <500 µA @ 264 VAC, 60 Hz, NC</div> <div>Output to GND <4 mA @ 264 VAC, 60 Hz, NC</div>
Efficiency	Meets US DoE Efficiency Level VI and EU CoC Tier 2 average efficiency levels
Common mode noise	High frequency (100 kHz to 20 MHz): <40 mA pk-pk
No load input power	<0.15 W meets DoE Efficiency Level VI and EU CoC Tier 2 requirements
Output	
Output voltage	See models chart on page 6
Output power	64.8 W continuous - See models chart for specific voltage model ratings
Turn on time	Less than 1 Sec @ 115 VAC, full load
Hold-up time	20 mS min., at full load, 100 VAC input
Ripple and noise	See models chart on page 6
Reliability	
MTBF	>900,000 hours, full load, 115 VAC input, 25°C amb., per Telcordia 332 Issue 6, Stress Method
Protection	
Overtemperature protection	Will shutdown upon an overtemperature condition, auto-recovery
Overload protection	130% to 180% of rating, hiccup mode
Overvoltage protection	130% to 150% of output voltage (max. 60 V on 48 V model), hiccup mode
Short circuit protection	Hiccup mode, auto-recovery
Safety	
Safety standards	Approved to EN/CSA/IEC/UL62368-1
Drop test	1.4 m from table top to wooden platform, 6 faces
Isolation	
Isolation	<div>Input to Output: 4000 VAC</div> <div>Input to Ground: 1500 VAC</div> <div>Output to Ground: 1500 VAC</div>

Note:

All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

DERATING CHART

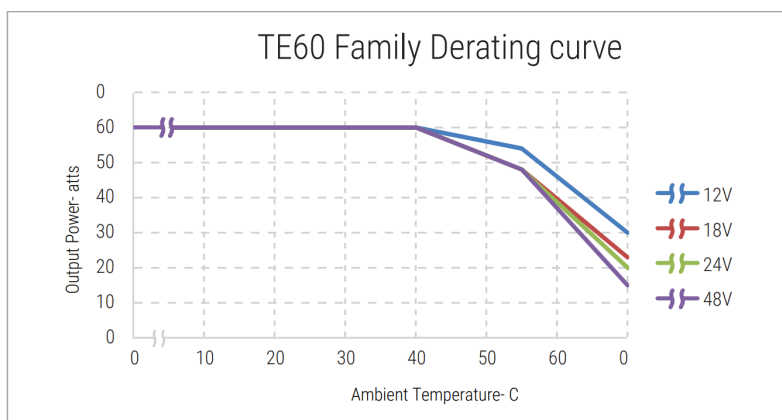

EMI/EMC COMPLIANCE

Conducted emissions	EN55032/EN55022/CISPR22 Class B, FCC Part 15.107, Class B: 6db margin type, at 115/230 VAC
Radiated emissions	EN55032/EN55022/CISPR22 Class B, FCC Part 15.109, Class B: 3db margin type, at 115/230 VAC
Electro-static discharge (ESD) immunity on power ports	EN55024/IEC61000-4-2, Level 4: ±8 kV contact, ±15 kV air, Criteria A
Radiated RF EM fields susceptibility	EN55022/EN61000-4-3, 10 V/m, 80 MHz to 2.7 GHz, 80% AM at 1 kHz
Electrical Fast Transients (EFT)/Burst immunity	EN55024/IEC61000-4-4, Level 4, ±4 kV, 100 kHz rep rate, 40 A, Criteria A
Surges, line to line (Diff mode) and line to ground (CMN mode)	EN55024/IEC61000-4-5, Level 4, ±2 kV DM, ±4 kV CM, Criteria A
Conducted disturbances induced by RF fields	EN55022/IEC61000-4-6, 10 Vrms - Level 4 in ISM and amateur radio bands between 0.15 MHz and 80 MHz, 80% AM at 1 kHz
Rated power frequency magnetic fields	EN55024/IEC1000-4-8, Level 4: 30 A/m, 50/60 Hz
Voltage interruptions, Dips, Sags & Surges	EN55024/IEC/EN61000-4-11: --100% dip for 20 mS, Criteria A --100% dip for 5000 mS (250/300 cycles), Criteria B --60% dip for 100 mS, Criteria B --30% dip for 500 mS, Criteria A
Harmonic current emissions	EN55011/EN61000-3-2, Class A
Flicker test	EN61000-3-3

Note:

All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

ENVIRONMENTAL SPECIFICATIONS


Operating temperature	-20°C to +70°C Derate above 40°C. Start up at -40°C, full load (warmup period before all parameters are within published specifications)
Storage temperature	-40°C to +85°C
Relative humidity	5% to 95%, non-condensing
Weight	400 grams
Temperature derating	See derating chart
Altitude	Operating: to 5000 m Non-operating: -500 ft to 40000 ft
Vibration	Operating: 0.003 g/Hz, 1.5 grams overall, 3 axes, 10 min/axis, 1 Hz to 500 Hz Non-Operating: random waveform, 3 minutes/axis, 3 axes and sine waveform, Vib. frequency/acceleration: 10 to 500 Hz/1 g, sweep rate of 1 octave/minutes, Vibration time of 10 sweeps/axes, 3 axes
Shock	Operating: half-sine, 20 gpk, 10 mS, 3 axes, 6 shocks total Non-Operating: half-sine waveform, impact acceleration of 100 G, pulse duration of 6 mS, Number of shocks: 3 for each of the 3 axis

Note:


All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

MECHANICAL DRAWING

5V Model

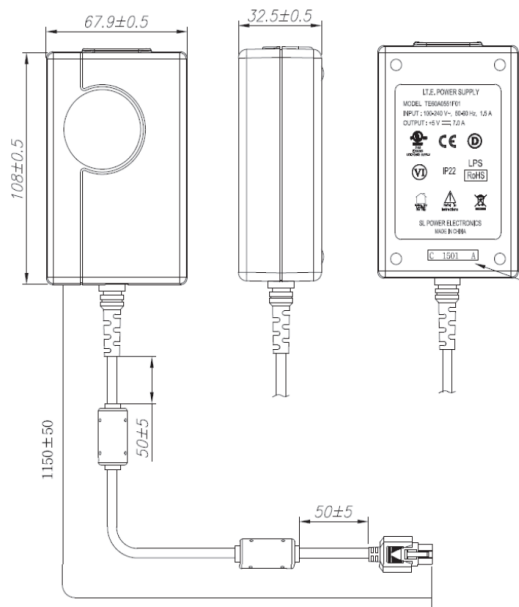

9V Model

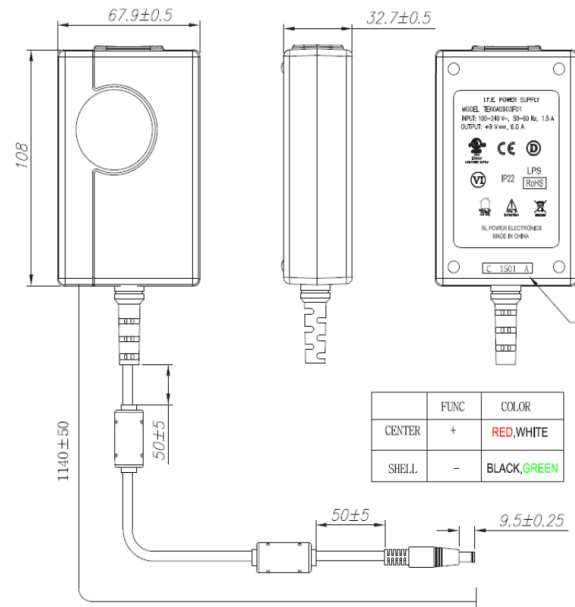


Notes:


1. All dimensions in mm.
2. The unit should not be covered or enclosed to protect against excessive case temperature rise.
3. Pins 4,5,6 are located closest to the locking tab.

PIN #	FUNCTION	COLOR
1	+V	RED
2	NC	-
3	COMMON	BLACK
4	+V	WHITE
5	NC	-
6	COMMON	GREEN
	BRAID	FG4

12V Model

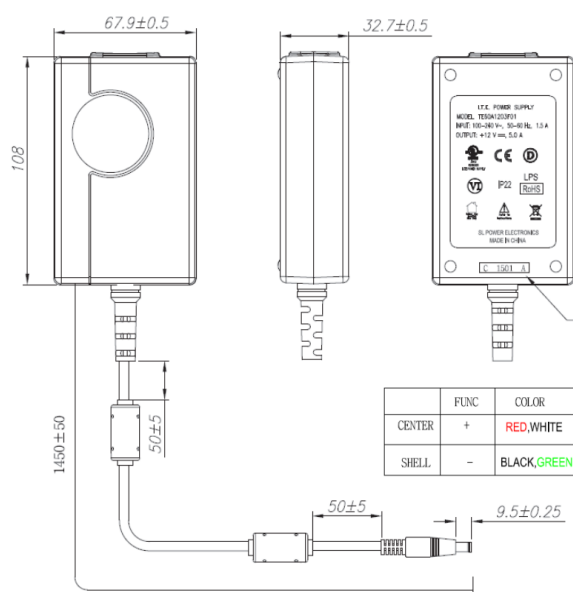

15V thru 48V Model

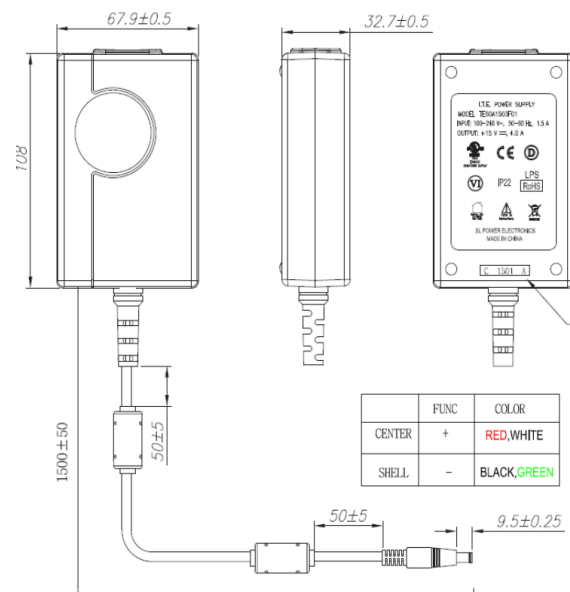

MODEL SELECTION

Model Number	Output Voltage	Output Current	Output Power	Ripple & Noise ¹	Line Regulation	Load Regulation	Output Connector	Output Cable	Input Configuration
TE60A0551F01	5.0 V	7.00 A	35.0 W	75mV pk-pk	± 1%	± 5%	6-pin Molex Type ² 2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	#18AWG, see mechanical drawings for cable length	Class I Desktop, IEC60320 C14 Receptacle ³
TE60A0903F01	9.0 V	6.00 A	54.0 W	90mV pk-pk	± 1%	± 5%			
TE60A1203F01	12.0 V	5.00 A	60.0 W	120mV pk-pk	± 1%	± 5%			
TE60A1503F01	15.0 V	4.00 A	60.0 W	150mV pk-pk	± 1%	± 5%			
TE60A1803F01	18.0 V	3.40 A	61.2 W	180mV pk-pk	± 1%	± 5%			
TE60A2403F01	24.0 V	2.70 A	64.8 W	240mV pk-pk	± 1%	± 5%			
TE60A4803F01	48.0 V	1.35 A	64.8 W	480mV pk-pk	± 1%	± 5%			
TE60A0551N01	5.0 V	7.00 A	35.0 W	75mV pk-pk	± 1%	± 5%	6-pin Molex Type ² 2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	#18AWG, see mechanical drawings for cable length	Class II Desktop, IEC60320 C8 Receptacle
TE60A0903N01	9.0 V	6.00 A	54.0 W	90mV pk-pk	± 1%	± 5%			
TE60A1203N01	12.0 V	5.00 A	60.0 W	120mV pk-pk	± 1%	± 5%			
TE60A1503N01	15.0 V	4.00 A	60.0 W	150mV pk-pk	± 1%	± 5%			
TE60A1803N01	18.0 V	3.40 A	61.2 W	180mV pk-pk	± 1%	± 5%			
TE60A2403N01	24.0 V	2.70 A	64.8 W	240mV pk-pk	± 1%	± 5%			
TE60A4803N01	48.0 V	1.35 A	64.8 W	480mV pk-pk	± 1%	± 5%			
TE60A0551Q01	5.0 V	7.00 A	35.0 W	75mV pk-pk	± 1%	± 5%	6-pin Molex Type ² 2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	#18AWG, see mechanical drawings for cable length	Class II Desktop, IEC60320 C18 Receptacle
TE60A0903Q01	9.0 V	6.00 A	54.0 W	90mV pk-pk	± 1%	± 5%			
TE60A1203Q01	12.0 V	5.00 A	60.0 W	120mV pk-pk	± 1%	± 5%			
TE60A1503Q01	15.0 V	4.00 A	60.0 W	150mV pk-pk	± 1%	± 5%			
TE60A1803Q01	18.0 V	3.40 A	61.2 W	180mV pk-pk	± 1%	± 5%			
TE60A2403Q01	24.0 V	2.70 A	64.8 W	240mV pk-pk	± 1%	± 5%			
TE60A4803Q01	48.0 V	1.35 A	64.8 W	480mV pk-pk	± 1%	± 5%			

Notes:

1. Measured at the output connector, with noise probe directly across output and load terminated with 0.1 μ F ceramic and 10 μ F low ESR capacitors. For 5 V and 6 V models, values listed are typical 100 mV pk-pk maximum.

2. Molex p/n 39-01-2060 or equivalent. See outline drawing for pinout information.

3. For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (TE60B1203F01).

4. All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

CONNECTOR INFORMATION

Standard models include a 2.5 x 5.5 x 9.5 mm straight barrel type connector (Ault #3), center positive. Other standard options are listed below. The "03" in the standard model number is replaced by the applicable digits below.

Connector No.	Description	Connector No.	Description
02	2.1 x 5.5 x 9.5 mm straight barrel plug - Center positive 	44	2.1 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive 
03	2.5 x 5.5 x 9.5 mm straight barrel plug - Center positive (Standard models) 	45	2.5 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive 
12	5-pin DIN - 180 male connector (Pins 3,5 = (+); pins 1,2,4 = (-)) 	48	3-pin Snap n Lock, Kycon Kpp - 3P or equivalent (Pin 1 = (+); pin 2 = (-)) 
22	6-pin DIN male connector (Pins 1,2 = (+); pins 4,5 = (-)) 	49	4-pin Snap n Lock, Kycon Kpp - 4P or equivalent (Pins 1,3 = (+); pins 2,4 = (-)) 
23	8-pin DIN male connector (Pins 3,7 = (+); pins 1,4,6,8 = (-); shell = FG) 	51	6-pin Minifit - Molex 39-01-2060 or equivalent (Pins 1,4 = (+); pins 3,6 = (-)) 
32	9-pin "D" type, female (Pin 8 = (+); pin 5 = (-); all others = NC) 	65	Stripped and tinned leads 
33	2.5 x 5.5 x 12.5 mm straight barrel plug - Center positive 	70	2.1 x 5.5 x 11 mm right angle barrel plug (High retention) - Center positive 
40	2.1 x 5.5 x 9.5 mm right angle barrel plug - (High retention) - Center positive 	71	2.5 x 5.5 x 11 mm right angle barrel plug (High retention) - Center positive 
41	2.5 x 5.5 x 9.5 mm right angle barrel plug - (High retention) - Center positive 	72	2.1 x 5.5 x 9.5 mm straight barrel plug (High retention, no spark) - Center positive 
42	2.1 x 5.5 x 11 mm straight barrel plug - (High retention) - Center positive 	73	2.5 x 5.5 x 9.5 mm straight barrel plug (High retention, no spark) - Center positive 
43	2.5 x 5.5 x 11 mm straight barrel plug - (High retention) - Center positive 	74	EIAJ#5 style connector - Central positive 

EFFICIENCY LEVEL VI INFORMATION

Single-Voltage External AC-DC Power Supply, Basic-Voltage		
Nameplate Output Power (Pout)	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode (W)
$P_{out} \leq 1 \text{ W}$	$\geq 0.5 \times P_{out} + 0.16$	≤ 0.100
$1 \text{ W} < P_{out} \leq 49 \text{ W}$	$\geq 0.071 \times \ln(P_{out}) - 0.0014 \times P_{out} + 0.67$	≤ 0.100
$49 \text{ W} < P_{out} \leq 250 \text{ W}$	≥ 0.880	≤ 0.210
$P_{out} > 250 \text{ W}$	≥ 0.875	≤ 0.500
Single-Voltage External AC-DC Power Supply, Low-Voltage		
Nameplate Output Power (Pout)	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode (W)
$P_{out} \leq 1 \text{ W}$	$\geq 0.517 \times P_{out} + 0.087$	≤ 0.100
$1 \text{ W} < P_{out} \leq 49 \text{ W}$	$\geq 0.0834 \times \ln(P_{out}) - 0.0014 \times P_{out} + 0.609$	≤ 0.100
$49 \text{ W} < P_{out} \leq 250 \text{ W}$	≥ 0.870	≤ 0.210
$P_{out} > 250 \text{ W}$	≥ 0.875	≤ 0.500



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE | TRUST

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2022 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[TE60A4803F01](#) [TE60A1203F01](#) [TE60A2403F01](#) [TE60A0903N01](#) [TE60A0903F01](#) [TE60A0903Q01](#) [TE60A0551F01](#)
[TE60A0551N01](#) [TE60A0551Q01](#) [TE60A1203Q01](#) [TE60A1203N01](#) [TE60A1803N01](#) [TE60A4803N01](#)
[TE60A1803F01](#) [TE60A2403N01](#) [TE60A1248F02](#)