

**EM2423 Series****EuroMag Terminal Blocks**

Pluggable Block with Flanges (Mates with EM2211 Series); 3.81 Centers



EM242307

**SPECIFICATIONS**

**Rating:** 10A, 300V

**Center Spacing:** 0.15" (3.81mm)

**Wire Range:** #16-26 AWG

**Housing Material:** UL rated 94V0 Thermoplastic

**Contact Material:** Brass Tin-Plated

**Cage Material:** Brass, Nickel-Plated

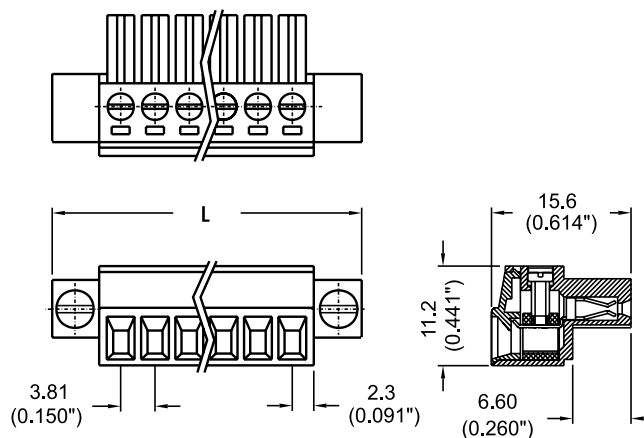
**Screw Size:** M2.0 Zinc-Plated Steel

**Operating Temperature:** 105°C (221°F) max., -40°C (-40°F) min.

**Torque Rating:** 3.0 lb-in.

**Construction:** Mold-to-Length

**Agency Information:** cULus File E62622; CE Certified

**Dimensions - mm (in)**

Poles	L (mm)
2	17.91
3	21.72
4	25.53
5	29.34
6	33.15
7	36.96
8	40.77
9	44.58
10	48.39
11	52.20
12	56.01

To convert to inches, divide by 25.4

**Part Numbering System**

Series

# of Poles

EM2423

02 12

02 to 12

Mating Header: EM2211 pg. 84

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[EM242302](#) [EM242303](#) [EM242308](#) [EM242304](#) [EM242311](#) [EM242305](#) [EM242306](#) [EM242310](#) [EM242307](#)  
[EM242312](#) [EM242309](#)