


SFE

Automotive fast-acting glass fuse

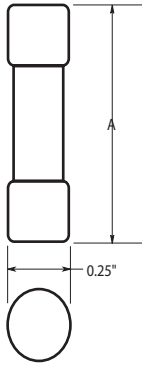

Dimensional Data

| Part number | Current rating (A) | "A" Length Inches | mm |
|-------------|--------------------|-------------------|------|
| SFE-4 | 4 | 5/8 | 15.9 |
| SFE-6 | 6 | 3/4 | 19.0 |
| SFE-7-1/2 | 7 1/2 | 7/8 | 22.2 |
| SFE-9 | 9 | 7/8 | 22.2 |
| SFE-14 | 14 | 1-1/16 | 27.0 |
| SFE-20 | 20 | 1-1/4 | 31.7 |
| SFE-30 | 30 | 1-7/16 | 36.5 |


Product features

- For automotive circuits.
- Visual indicating glass tubing.
- Made to SAE specifications.
- 32 V, 4 A – 30 A
- Physical size varies with electrical rating of fuse to prevent over-fusing.
- For mounting in in-line holders, and 1/4" clips.

Agency information

- U.L. LISTED: GUIDE #FHXT, FILE #AU169)

Time-Current Characteristics—Total Clear

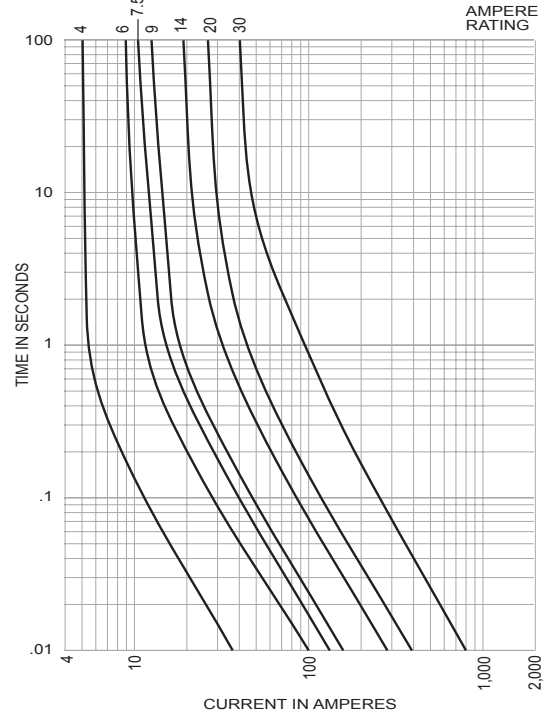

In-line Fuseholders

| Wire Length | Catalog Number | | |
|----------------------|----------------|-------------------------|------------------------|
| | Fuse | Fuse & Holder (w/leads) | Holder Only (No Leads) |
| 19" (#14 Wire) | SFE-20 | HRJ | *HHJ-A, HHJ-B |
| | SFE-14 | HRI | *HHI-A, HHI-B |
| | SFE-9 | HRH | HHH-A |
| | SFE-7-1/2 | HRE | HHH-A |
| | SFE-6 | HRG | HIG-A |
| | SFE-4 | HRF | HIR-A |
| | SFE-20 | HMJ | *HDJ-A, HDJ-B |
| 8" (#14 Wire) | SFE-14 | HMI | *HDI-A, HDI-B |
| | SFE-9 | HMH | — |
| | SFE-7-1/2 | HME | — |
| | SFE-6 | HMG | — |
| | SFE-4 | HMF | — |

*-A: Crimp connections for #18 - #22 wire.
-B: Crimp connections for #12 - #16 wire.

Carton Quantity and Weight

| Part number | Carton Qty | Weight* | |
|-------------|------------|---------|-------|
| | | Lbs. | Kg. |
| SFE-4 | 100 | 0.73 | 0.331 |
| SFE-6 | 100 | 0.75 | 0.340 |
| SFE-7-1/2 | 100 | 0.80 | 0.363 |
| SFE-9 | 100 | 0.80 | 0.363 |
| SFE-14 | 100 | 0.82 | 0.372 |
| SFE-20 | 100 | 0.87 | 0.395 |
| SFE-30 | 100 | 1.60 | 0.762 |

* Weight per carton.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 2059 SB98107
June 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[BK/SFE-4](#) [BK/SFE-30](#) [BK/SFE-20](#) [BK/SFE-7-1/2](#) [BK/SFE-9](#) [SFE-4](#)