

# LAN2VSOP

## 1000BASE-T LAN transformer, PoE



Photo is representative

### Product features

- IEEE 802.3ab, 802.3.at compliant
- 1500 Vac isolation between primary and secondary
- Single and dual port options
- Toroid core winding, open header, surface mount
- Weight 2.04 g-3.30 g typical
- Moisture sensitivity level (MSL): 1

### Applications

- SELV/ELV equipment
- IP telephones
- Wireless LAN access point
- IoT, Remote monitoring
- Smart TV
- Network camera
- Data centers

### Environmental compliance and general specifications

- Operating ambient temperature range: -40 °C to +85 °C
- Storage temperature range (component): -40 °C to +125 °C



## Product specifications (+25 °C)

Meets IEEE 802.3at Standards 720 mA current capability Per PoE Port / Two-pair.

| Part number <sup>4</sup> | Port   | Pins | Inductance <sup>1,5</sup><br>(μH) | Leakage inductance <sup>1,5</sup><br>(μH) | DCR <sup>2,5</sup><br>(Ω) | CWW <sup>1,5</sup><br>(pF) | Turns ratio <sup>3</sup> | Insertion loss <sup>3,5</sup><br>(dB) | Return loss <sup>3,5</sup><br>(dB)                    | Cross talk <sup>5</sup> (dB)<br>(between each channel) | CMRR <sup>3,5</sup><br>(dB) |
|--------------------------|--------|------|-----------------------------------|---|---------------------------|----------------------------|--------------------------|---------------------------------------|---|--|-----------------------------|
| LAN2VSOPS24351C2*        | Single | 24   | 350 @<br>13 mA<br>DC Bias         | 0.5                                       | 1.4                       | 35                         | 1CT:1CT,<br>±2%          | -1.1 @ 0.5-100 MHz                    | -18 @ 0.5-40 MHz<br>-12+20*log(f/80)<br>@40.1-100 MHz | -35 @ 0.5-40 MHz<br>-33+20*log(f/50) @<br>40.1-100 MHz | -30 @ 0.5-100 MHz           |
| LAN2VSOPD48351C2*        | Dual   | 48   | 350 @<br>10.8 mA<br>DC Bias       | 0.5                                       | 0.6                       | 35                         | 1CT:1CT,<br>±2%          | -1.1 @ 0.5-100 MHz                    | -18 @ 0.5-40 MHz<br>-12+20*log(f/80)<br>@40.1-100 MHz | -35 @ 0.5-40 MHz<br>-33+20*log(f/50) @<br>40.1-100 MHz | -30 @ 0.5-100 MHz           |

1. Inductance (Transformer side), Leakage Inductance (Transformer side, short CMC side),  
CWW (Interwinding Capacitance, Pri to Sec): Test parameters: 100 kHz, 0.2 V

2. DCR: CMC side

3. Turns ratio, Insertion loss, return loss and CMRR (Common mode rejection ratio): Primary to secondary:  
Polarity pin 1 side in phase

\*Operating temperature: (temperature rise not included) -40 °C to +85 °C

LAN2VSOPS24351C2: Temperature rise ≤ 15 °C; Hipot 1500 Vac primary to secondary

LAN2VSOPD48351C2: Temperature rise ≤ 35 °C; inductance will be 300 μH min @ 10.8 mA DC Bias @ +120 °C include temperature rise;  
Hipot 1500 Vac primary to secondary

4. Part number definition: LAN2VSOPxxx351xx

LAN2VSOP= Product code


xxx: S24 = Single port, 24 Pin, D48 = Dual port, 48 Pin

xx: C2 = -40 to +85 °C


5. DCR, CWW, Leakage inductance and Insertion loss values are maximum; Inductance, Return loss, CMRR and Cross talk values are minimum

## Mechanical parameters (mm)

### LAN2VSOPS24351C2

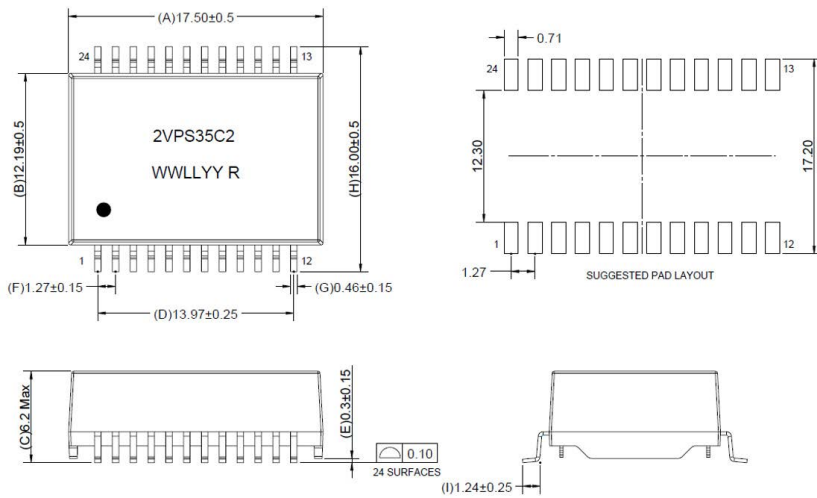

## Schematic

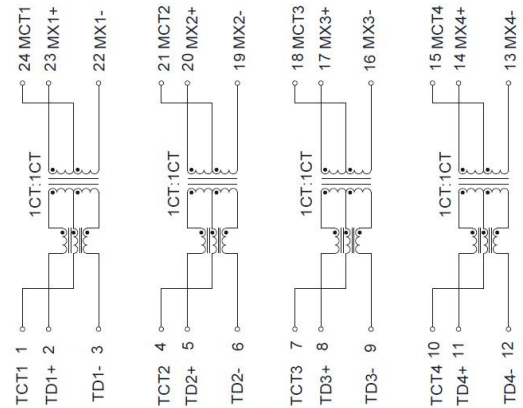


Part marking: 2VPS35C2, WWLLYY R = Lot code, Dot indicates pin 1

Pin length does not include include solder point

Silkscreen thickness: 0.1 mm to 0.15 mm

Traces or vias underneath the transformer is not recommended

**Mechanical parameters (mm)**  
**LAN2VSOPD48351C2**

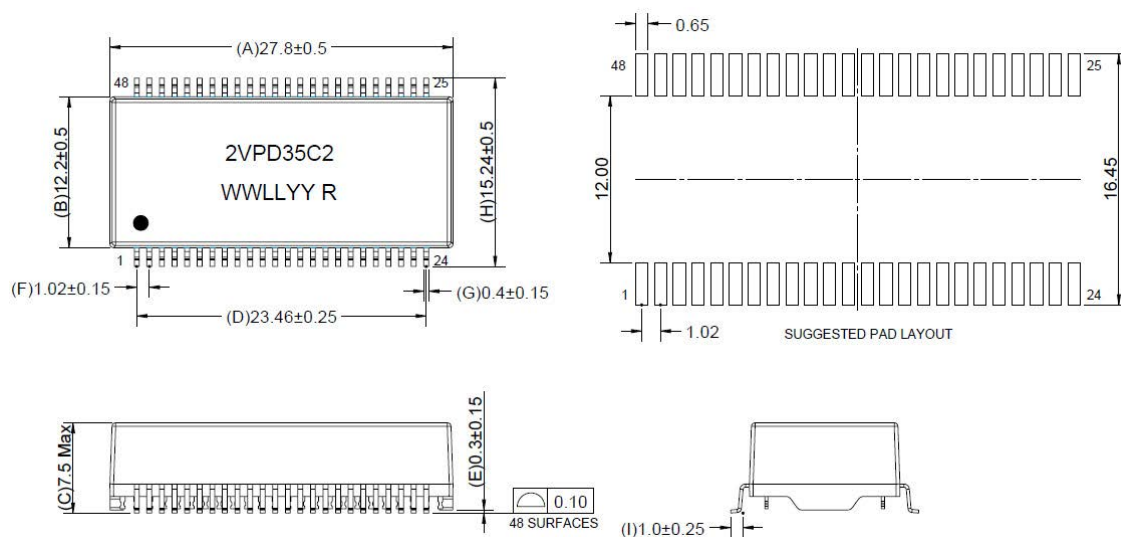


Part marking: 2VPD35C2, WWLLYY R = Lot code, Dot indicates pin 1

Pin length does not include include solder point

Silkscreen thickness: 0.1 mm to 0.15 mm

Traces or vias underneath the transformer is not recommended


**Schematic**

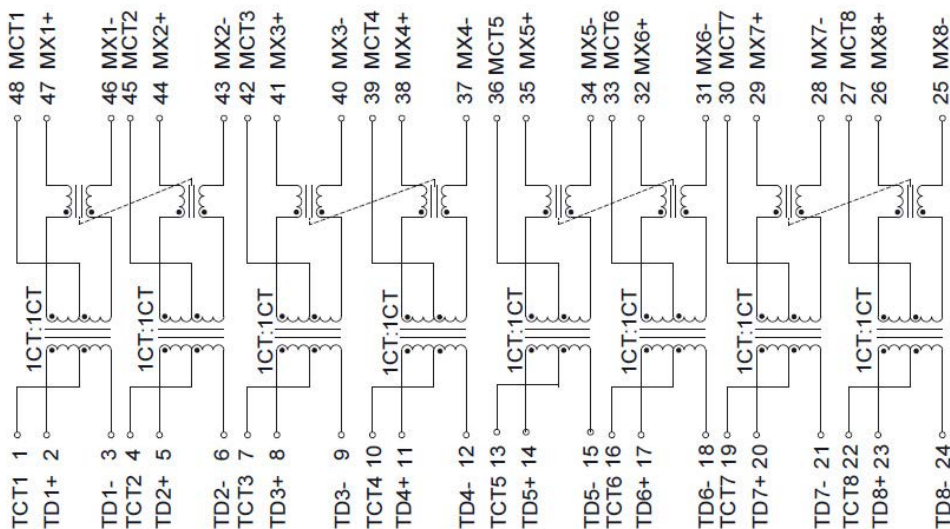

## Packaging information (mm)


Drawing not to scale

Supplied in tape and reel packaging on a 13" diameter reel, EIA-481 compliant

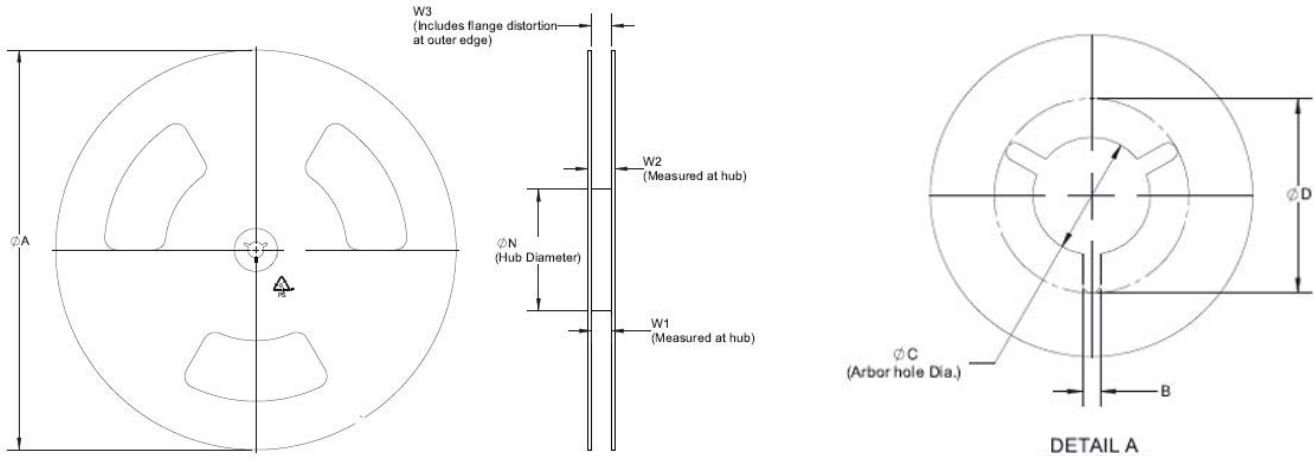

## Reel dimension (mm)

| Part number      | $\phi A$    | B       | $\phi C$          | $\phi D$ | $\phi N$ | W1              | W2       | W3  |
|------------------|-------------|---------|-------------------|----------|----------|-----------------|----------|-----|
| LAN2VSOPS24351C2 | $330 \pm 2$ | 1.5 min | $13 + 0.5 / -0.2$ | 20.2 min | 100      | $32.4 + 2 / -0$ | 38.4 max | N/A |
| LAN2VSOPD48351C2 | $330 \pm 2$ | 1.5 min | $13 + 0.5 / -0.2$ | 20.2 min | 100      | $44.4 + 2 / -0$ | 50.4 max | N/A |

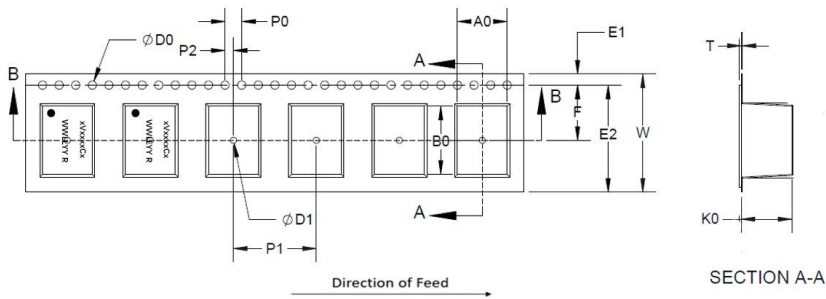

## Tape dimension (mm)

| Part number      | Ao            | Bo             | Ko            | T              | W            | F              | E1             | E2        | P0          | P1           | P2           | $\phi D0$        | $\phi D1$      |
|------------------|---------------|----------------|---------------|----------------|--------------|----------------|----------------|-----------|-------------|--------------|--------------|------------------|----------------|
| LAN2VSOPS24351C2 | $17 \pm 0.1$  | $17.9 \pm 0.1$ | $7.2 \pm 0.1$ | $0.5 \pm 0.05$ | $32 \pm 0.3$ | $14.2 \pm 0.1$ | $1.75 \pm 0.1$ | 29.85 min | $4 \pm 0.1$ | $20 \pm 0.1$ | $2 \pm 0.15$ | $1.5 + 0.1 / -0$ | 2.0 min        |
| LAN2VSOPD48351C2 | $16 \pm 0.15$ | $28.2 \pm 0.1$ | $7.8 \pm 0.1$ | $0.5 \pm 0.05$ | $44 \pm 0.3$ | $20.2 \pm 0.1$ | $1.75 \pm 0.1$ | 41.85 min | $4 \pm 0.1$ | $24 \pm 0.1$ | $2 \pm 0.1$  | $1.5 + 0.1 / -0$ | $2 + 0.1 / -0$ |


## Packaging quantity

| Part number      | Reel | Bag | Box | Carton |
|------------------|------|-----|-----|--------|
| LAN2VSOPS24351C2 | 400  | 400 | 400 | 1600   |
| LAN2VSOPD48351C2 | 300  | 300 | 600 | 1200   |

## General specifications

|                           |                          |  |
|---------------------------|--------------------------|--|
| Solderability             | J-STD-002.               | 8 hours steam age test, Solder: +245 °C ± 5 °C (5 s)   |
| Reflow                    | MIL-STD-202G Condition J | +260 °C ± 5 °C, 30 s ± 5 s, 1 times reflow   |
| Resistance soldering heat | MIL-STD-202H, Method 210 | +260 °C , 10 s   |
| Operational life          | MIL-STD-202, Method 108  | 1000 hours, +85 °C @ 720 mA  |
| Temperature cycling       | MIL-STD-202G             | High temperature= +125 °C, low temperature -40 °C, conversion time 15 minutes, 32 cycles   |
| Biased humidity           | MIL-STD-202G             | +85 °C, 85% RH, Duration= 1000 hours   |
| Vibration                 | MIL-STD-202              | 10 Hz to 80 Hz, Increased at +3 dB/octave, 80 Hz to 350 Hz, 0.053 g <sup>2</sup> /Hz, 350 Hz to 2000 Hz, Decrease at -3 dB/octave, X, Y and Z vibrate for 15 minutes each. |
| Mechanical shock          | MIL-STD-202, Method 213  | Half-sine shock pulse, peak=50 g's, 11 ms, total 18 shocks   |
| Terminal strength         | CBA203A-001              | Standard: 4.5 kg, Minimum: 60 s, no visible damage   |

## Solder reflow profile

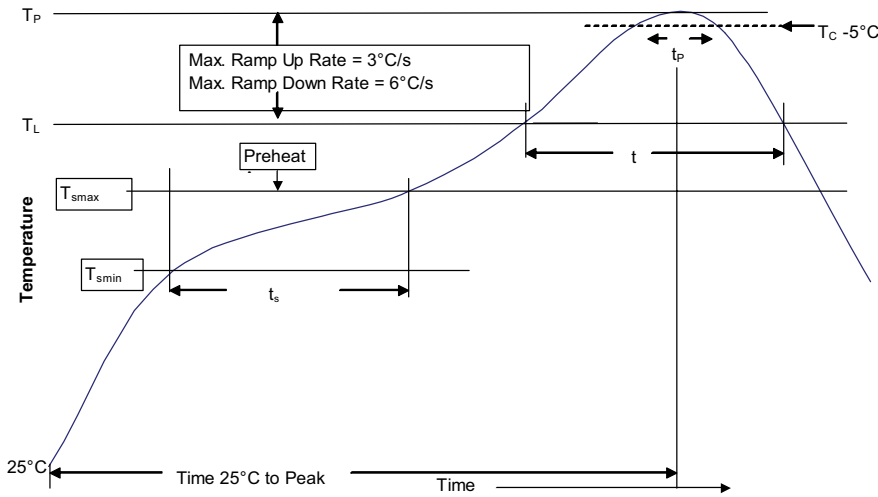

**Table 1 - Standard SnPb solder (T<sub>c</sub>)**

| Package thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> ≥350 |
|-------------------|-----------------------------|-----------------------------|
| <2.5 mm           | 235 °C                      | 220 °C                      |
| ≥2.5 mm           | 220 °C                      | 220 °C                      |

**Table 2 - Lead (Pb) free solder (T<sub>c</sub>)**

| Package thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> 350 - 2000 | Volume mm <sup>3</sup> >2000 |
|-------------------|-----------------------------|-----------------------------------|------------------------------|
| <1.6 mm           | 260 °C                      | 260 °C                            | 260 °C                       |
| 1.6 – 2.5 mm      | 260 °C                      | 250 °C                            | 245 °C                       |
| >2.5 mm           | 250 °C                      | 245 °C                            | 245 °C                       |

## Reference J-STD-020

| Profile feature   | Standard SnPb solder | Lead (Pb) free solder |
|---|----------------------|-----------------------|
| Preheat and soak  |                      |                       |
| • Temperature min. (T <sub>ssmin</sub> )  | 100 °C               | 150 °C                |
| • Temperature max. (T <sub>ssmax</sub> )  | 150 °C               | 200 °C                |
| • Time (T <sub>ssmin</sub> to T <sub>ssmax</sub> ) (t <sub>s</sub> )                              | 60-120 seconds       | 60-120 seconds        |
| Ramp up rate T <sub>L</sub> to T <sub>p</sub>   | 3 °C/ second max.    | 3 °C/ second max.     |
| Liquidous temperature (T <sub>L</sub> )   | 183 °C               | 217 °C                |
| Time (t <sub>L</sub> ) maintained above T <sub>L</sub>  | 60-150 seconds       | 60-150 seconds        |
| Peak package body temperature (T <sub>p</sub> )*  | Table 1              | Table 2               |
| Time (t <sub>p</sub> )* within 5 °C of the specified classification temperature (T <sub>c</sub> ) | 20 seconds*          | 30 seconds*           |
| Ramp-down rate (T <sub>p</sub> to T <sub>L</sub> )  | 6 °C/ second max.    | 6 °C/ second max.     |
| Time 25 °C to peak temperature  | 6 minutes max.       | 8 minutes max.        |

\* Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2023 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1376 BU-ELX22244  
October 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[LAN2VSOPD48351C2](#) [LAN2VSOPS24351C2](#)