

NH DIN Dual Indication Fuse Links

Class aM, 500 & 690Vac, 6 to 630 Amps, Sizes 000 to 3

NH**Catalogue Symbol**

- 500V: (amp)NHM(Size)B
- 690V: (amp)NHM(Size)B-690

Operation Class: aM**Fuse Holders**

- Fuse bases: SB*-D single-pole, TB*-D three-pole
- Fuse rails - vertical: BFR
- Fuse switch disconnectors vertical: BFD
- Fuse switch disconnectors horizontal: BFH

* Select required size of fuse base

Standards/Approvals

- IEC 60269, DIN 43620 Part 1 and 3

Description

Cooper Bussmann® aM fuse links have partial range breaking capacity and must be used in conjunction with a low overload protection device such as a motor protection relay.

Packaging

All fuse links are packed in 3's

Technical Data

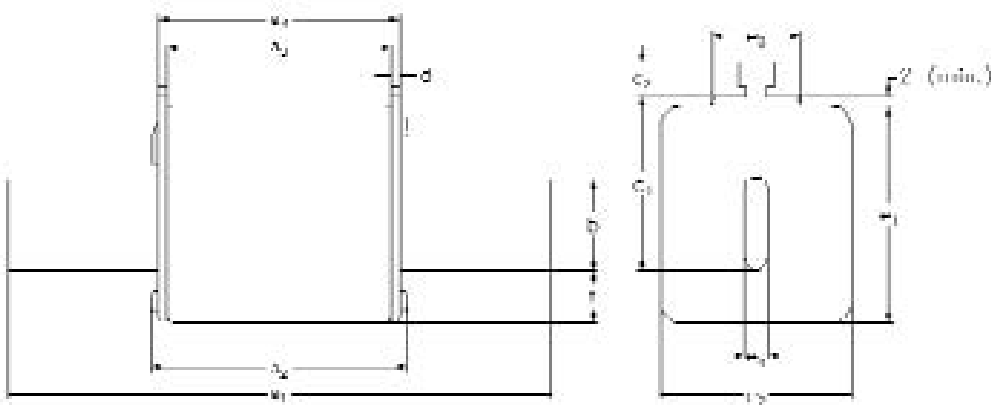
- Size: 000 to 3
- Rated voltage: 500 and 690Vac
- Amps: 6 to 630A
- Rated breaking capacity: 120kA
- Operating frequency: 45-62Hz
- Design material - Steatite insulator
 - Corrosion-resistant aluminium end plates
 - Corrosion-resistant plated steel screws
- Contact blade: Full contact silver plated copper blades

Environmental

- 100% recyclable (including packaging)
- RoHS compliant
- Cadmium and lead free for sizes 000 to 3

Features

- Reliable dual indicator system

Dimensions - mm

Size	a ₁	a ₂ (max)	a ₃	a ₄	b	c ₁	c ₂	d	e ₁ (max)	e ₂ (max)	e ₃ (max)	e ₄	f (max)
000	78.5±1.5	54	45±1.5	49±1.5	15	35	10	2±0.5	41	21	16	6	8
00	78.5±1.5	54	45±1.5	49±1.5	15	35	11	2±0.5	48	30	25	6	15
0	125±2.5	68	62 ^{+3/-1.5}	68 ^{+1.5/-3}	15	35	11	2.5±0.5	48	30	25	6	15
1	135±2.5	75	62±2.5	68±2.5	20	40	11	2.5±0.5	53	52	25	6	15
2	150±2.5	75	62±2.5	68±2.5	25	48	11	2.5±0.5	61	60	25	6	15
3	150±2.5	75	62±2.5	68±2.5	32	60	11	3±0.5	75	70	25	6	18

NH DIN Dual Indication Fuse Links

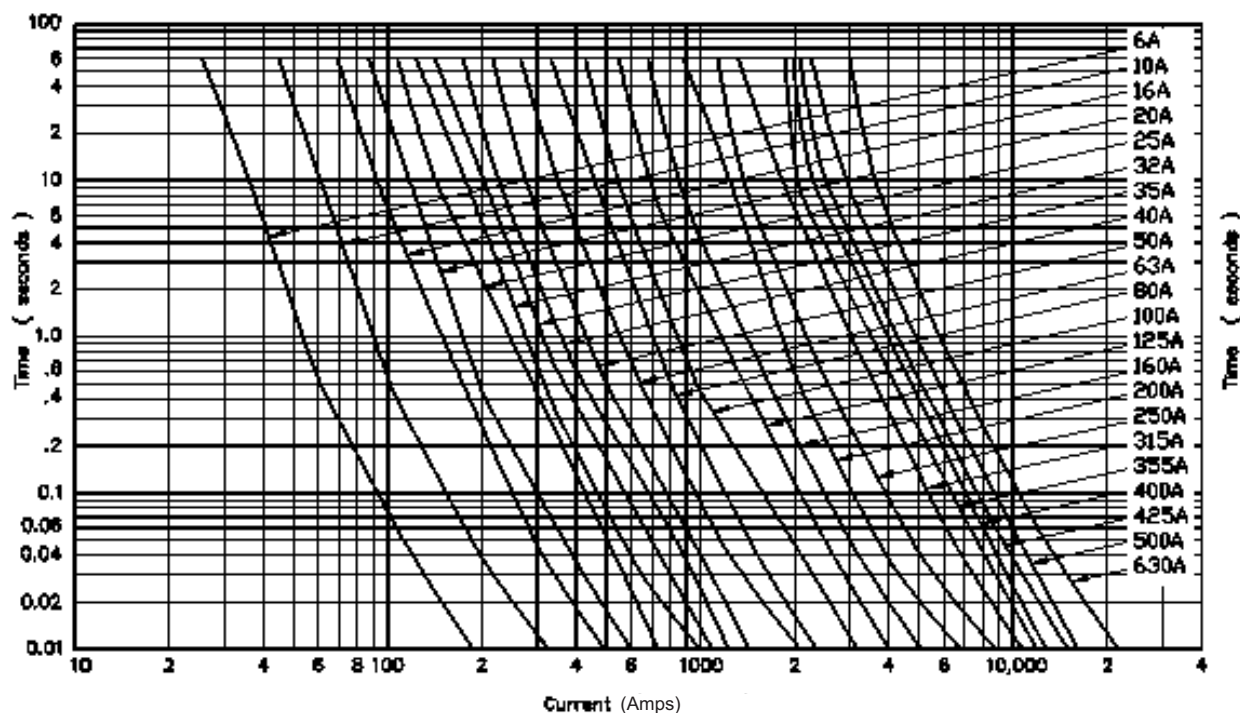
Class aM, 500 & 690Vac, 6 to 630 Amps, Size 000 to 3

NH**Technical Data**

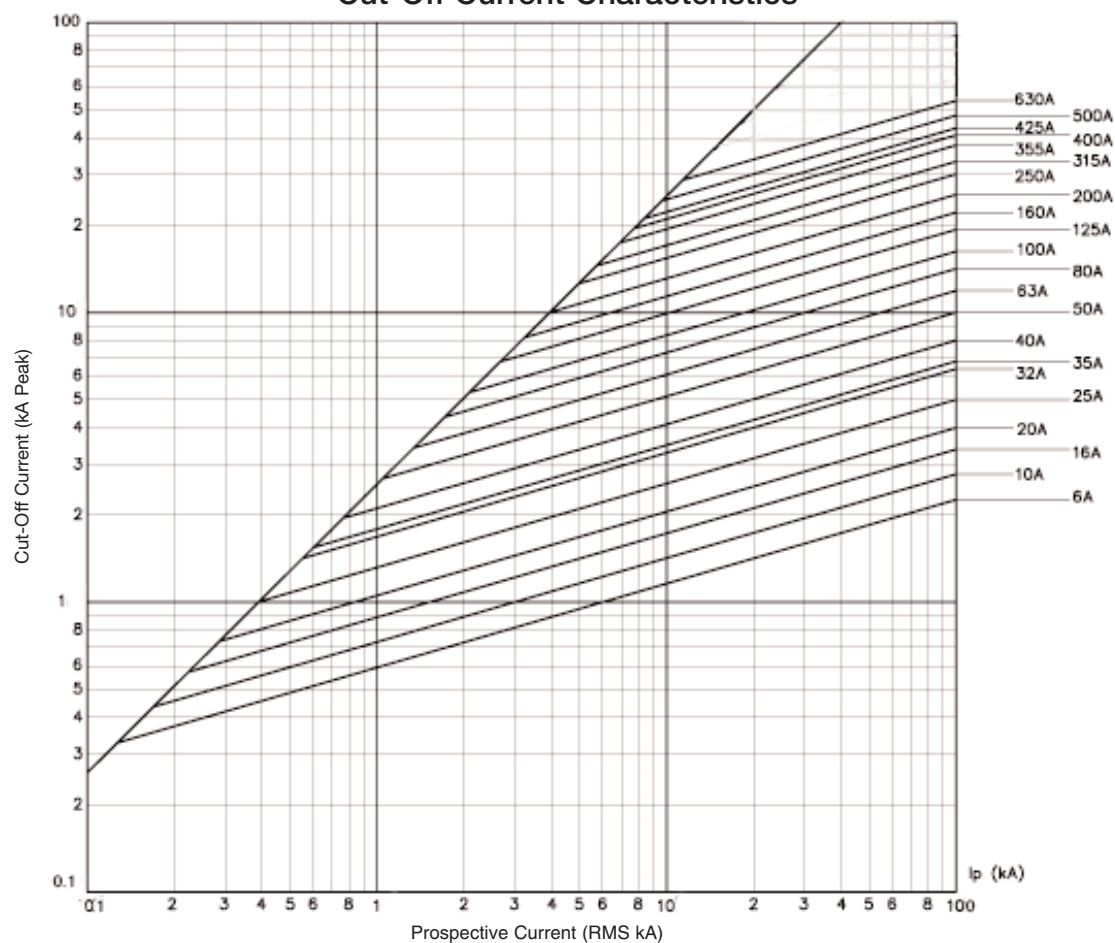
Part Number	Fuse Size	Amp Rating	Voltage Rating	I ² t Pre-arcing	Total Clearing at 500V	Total Clearing at 690V	Watts Loss	Net Weight per Fuse
6NHM000B-690	000	6	690Vac	71	-	360	0.33	0.133kg
10NHM000B-690		10		175	-	700	0.52	
16NHM000B-690		16		520	-	2000	0.81	
20NHM000B-690		20		790	-	3000	0.92	
25NHM000B-690		25		1000	-	4000	1.08	
32NHM000B-690		32		1700	-	6800	1.42	
35NHM000B-690		35		2450	-	9100	1.58	
40NHM000B-690		40		3500	-	13500	1.68	
50NHM00B	00	50	500Vac	5000	14000	-	2.28	0.200kg
63NHM00B		63		8800	24000	-	2.90	
80NHM00B		80		10500	30100	-	4.19	
100NHM00B		100		17000	49000	-	5.09	
160NHM00B		160		38000	100000	-	7.73	
6NHM0B-690	0	6	690Vac	71	-	360	0.42	0.245kg
10NHM0B-690		10		175	-	700	0.67	
16NHM0B-690		16		520	-	2000	0.98	
20NHM0B		20		790	2100	-	1.04	
32NHM0B		32	500Vac	1750	4900	-	1.67	
50NHM0B		50		5000	14000	-	2.51	
63NHM0B		63		8800	24000	-	3.35	
80NHM0B		80		10500	30100	-	4.93	
100NHM0B		100		17000	49000	-	5.72	
63NHM1B	1	63	500Vac	8800	24000	-	3.20	0.409kg
80NHM1B		80		10500	30100	-	4.60	
100NHM1B		100		17000	49000	-	5.70	
125NHM1B		125		25000	70000	-	6.98	
160NHM1B		160		38000	100000	-	9.20	
200NHM1B		200		51000	150000	-	13.70	
250NHM1B		250		79000	210000	-	15.30	
125NHM2B-690	2	125	690Vac	25000	-	96000	7.60	0.647kg
160NHM2B-690		160		38000	-	145000	9.70	
200NHM2B-690		200		51000	-	200000	13.90	
250NHM2B-690		250		79000	-	300000	17.00	
315NHM2B-690		315		115000	-	450000	26.00	
355NHM2B-690		355		165000	-	650000	25.20	
400NHM2B		400	500Vac	250000	710000	-	29.30	
315NHM3B-690	3	315	690Vac	110000	-	450000	20.60	1.113kg
355NHM3B-690		355		160000	-	650000	23.90	
400NHM3B-690		400		250000	-	980000	26.50	
500NHM3B-690		500		550000	-	2000000	35.80	
630NHM3B		630	500Vac	800000	2300000	-	56.90	

NH DIN Dual Indication Fuse Links

Class aM, 500 & 690Vac, 6 to 630 Amps, Size 000 to 3

NH

Cut-Off Current Characteristics



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[200NHM1B](#) [250NHM1B](#) [100NHM00B](#) [80NHM00B](#) [400NHM2B](#) [160NHM1B](#) [315NHM2B-690](#) [32NHM000B-690](#)
[250NHM2B-690](#)