


High Capacitance Computer Grade

Type DCM - Best Value Capacitance/Type DCMX - Maximum Capacitance

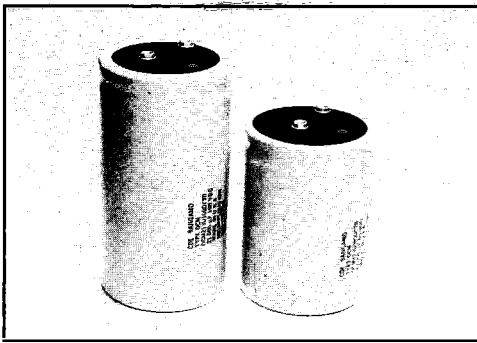

These aluminum electrolytic capacitors are designed for power supply filters, welding equipment, computer hold up power and other industrial applications where large capacitance, low ESR and high ripple current are required.

Performance Highlights:

- Capacitance 66 uF to 1,100,000 uF
- Voltage 6.3 Vdc to 450 Vdc
- Operating temperature -40°C to +85°C
- 1000 hours full-ripple life test at +85°C
- 100 hours shelf life test at +85°C

- Standard capacitance tolerances
 < 200 Vdc = -10 to +75%
 ≥ 200 Vdc = -10 to +50%
- Leakage current ≤ 0.005CV uA (6 mA max)

Ratings:

Capacitance uF	ESR max ohms		Ripple amps 85°C		Nominal Case Size D x L (inches)	Catalog Number
	120Hz,	20kHz	120Hz,	20kHz		
6.3 Vdc - 8 Vdc Surge						
23000	0.0510	0.0350	4.9	7.1	1 1/2 x 1 1/2	DCM233U6R3AK2B
34000	0.0340	0.0240	6.3	9.0	1 3/4 x 2 1/4	DCM343U6R3AA2B
34000	0.0510	0.0350	4.9	7.1	1 3/4 x 1 1/2	DCMX343U6R3AK2B
49000	0.0240	0.0170	7.8	10.8	1 3/4 x 2 1/2	DCM493U6R3AH2B
51000	0.0300	0.0210	6.8	9.6	1 3/4 x 2 1/4	DCMX513U6R3AA2B
65000	0.0190	0.0130	8.9	12.1	1 3/4 x 3 1/4	DCM653U6R3AB2B
73000	0.0230	0.0160	8.0	11.2	1 3/4 x 2 3/4	DCMX733U6R3AH2B
95000	0.0140	0.0100	10.4	13.6	1 3/4 x 4 1/4	DCM953U6R3AC2B
95000	0.0190	0.0130	8.9	12.1	1 3/4 x 3 1/4	DCMX953U6R3AB2B
130000	0.0140	0.0110	12.0	14.9	2 x 3 1/4	DCM134U6R3BB2B
140000	0.0110	0.0081	11.2	13.8	1 3/4 x 5 1/4	DCM144U6R3AF2B
140000	0.0140	0.0100	10.4	13.6	1 3/4 x 4 1/4	DCMX144U6R3AC2B
160000	0.0120	0.0095	11.6	13.6	1 3/4 x 4 1/4	DCM164U6R3EC2B
190000	0.0130	0.0100	12.6	15.7	2 x 4 1/4	DCMX194U6R3BB2B
200000	0.0100	0.0074	14.7	17.9	2 x 4 1/4	DCM204U6R3BC2B
210000	0.0110	0.0086	10.9	13.4	1 3/4 x 5 1/4	DCMX214U6R3AF2B
230000	0.0094	0.0073	13.1	15.4	1 3/4 x 4 1/4	DCMX234U6R3EC2B
300000	0.0100	0.0073	14.7	17.9	2 x 4 1/4	DCMX304U6R3BC2B
310000	0.0069	0.0053	16.9	20.6	2 x 5 1/4	DCM314U6R3BF2B
330000	0.0068	0.0054	19.6	22.6	2 1/2 x 4 1/4	DCM334U6R3CC2B
450000	0.0069	0.0053	16.9	20.6	2 x 5 1/4	DCMX454U6R3BF2B
470000	0.0064	0.0054	20.7	22.4	3 x 4 1/4	DCM474U6R3DC2B
480000	0.0068	0.0054	19.6	22.6	2 1/2 x 4 1/4	DCMX484U6R3CC2B
500000	0.0049	0.0044	22.9	25.9	2 1/2 x 5 1/4	DCM504U6R3CF2B
560000	0.0049	0.0054	18.9	19.8	3 x 5 1/4	DCM564U6R3DE2B
670000	0.0068	0.0053	20.7	22.4	3 x 4 1/4	DCMX674U6R3DC2B
710000	0.0047	0.0041	24.5	26.2	3 x 5 1/4	DCM714U6R3DF2B
740000	0.0045	0.0040	24.7	26.4	3 x 5 1/4	DCMX744U6R3DP2B
740000	0.0049	0.0039	22.9	25.9	2 1/2 x 5 1/4	DCM744U6R3CF2B
900000	0.0049	0.0043	23.5	25.2	3 x 5 1/4	DCMX904U6R3DE2B
900000	0.0045	0.0040	24.5	26.2	3 x 5 1/4	DCMX105U6R3DF2B
1100000	0.0044	0.0039	24.7	26.4	3 x 5 1/4	DCMX115U6R3DP2B
7.5 Vdc - 9 Vdc Surge						
21000	0.0510	0.0350	4.8	7.1	1 3/4 x 1 1/2	DCM213U7R5AK2B
31000	0.0350	0.0240	6.2	9.0	1 3/4 x 2 1/4	DCM313U7R5AA2B
33000	0.0510	0.0350	4.8	7.1	1 3/4 x 1 1/2	DCMX333U7R5AK2B
45000	0.0240	0.0170	7.7	10.8	1 3/4 x 2 1/4	DCM453U7R5AH2B

Capacitance uF	ESR max ohms		Ripple amps 85°C		Nominal Case Size D x L (inches)	Catalog Number
	120Hz,	20kHz	120Hz,	20kHz		
7.5 Vdc - 9 Vdc Surge						
49000	0.0300	0.0210	6.7	9.6	1 3/4 x 2 1/4	DCMX493U7R5AA2B
59000	0.0190	0.0130	8.8	12.1	1 3/4 x 3 1/4	DCM593U7R5AB2B
71000	0.0230	0.0160	7.9	11.2	1 3/4 x 2 1/4	DCMX713U7R5AH2B
87000	0.0140	0.0100	10.3	13.6	1 3/4 x 4 1/4	DCM873U7R5AC2B
92000	0.0190	0.0130	8.8	12.1	1 3/4 x 3 1/4	DCMX923U7R5AB2B
120000	0.0140	0.0110	11.9	14.9	2 x 3 1/4	DCM124U7R5BB2B
130000	0.0110	0.0081	11.1	13.8	1 3/4 x 5 1/4	DCM134U7R5AF2B
140000	0.0140	0.0100	10.3	13.6	1 3/4 x 4 1/4	DCMX144U7R5AC2B
140000	0.0120	0.0095	11.5	13.6	1 3/4 x 4 1/4	DCM144U7R5EC2B
180000	0.0100	0.0074	14.6	17.9	2 x 4 1/4	DCM184U7R5BC2B
190000	0.0130	0.0100	12.5	15.7	2 x 3 1/4	DCMX194U7R5BB2B
200000	0.0120	0.0086	10.8	13.4	1 3/4 x 5 1/4	DCM204U7R5AF2B
220000	0.0095	0.0073	13.1	15.4	1 3/4 x 4 1/4	DCMX224U7R5EC2B
280000	0.0070	0.0053	16.8	20.0	2 x 5 1/4	DCM284U7R5BF2B
290000	0.0100	0.0073	14.6	17.9	2 x 4 1/4	DCMX294U7R5BC2B
300000	0.0069	0.0054	19.5	22.6	2 1/2 x 4 1/4	DCM304U7R5CC2B
430000	0.0064	0.0055	20.6	22.4	3 x 4 1/4	DCM434U7R5DC2B
440000	0.0069	0.0053	16.8	20.0	2 x 5 1/4	DCMX444U7R5BF2B
460000	0.0049	0.0040	22.8	25.9	2 1/2 x 5 1/4	DCM464U7R5CF2B
470000	0.0068	0.0054	19.5	22.6	2 1/2 x 4 1/4	DCMX474U7R5CC2B
510000	0.0066	0.0059	18.9	19.8	3 x 5 1/4	DCM514U7R5DE2B
650000	0.0047	0.0041	24.4	26.2	3 x 5 1/4	DCM654U7R5DF2B
650000	0.0062	0.0053	20.6	22.4	3 x 4 1/4	DCMX654U7R5DC2B
680000	0.0045	0.0040	24.7	26.4	3 x 5 1/4	DCM684U7R5DP2B
710000	0.0049	0.0039	22.8	25.9	2 1/2 x 5 1/4	DCMX714U7R5CF2B
870000	0.0050	0.0043	23.4	25.2	3 x 5 1/4	DCMX874U7R5DE2B
980000	0.0046	0.0040	24.4	26.2	3 x 5 1/4	DCMX984U7R5DF2B
1000000	0.0044	0.0039	24.7	26.4	3 x 5 1/4	DCMX105U7R5DP2B
10 Vdc - 12 Vdc Surge						
*6000	0.1300	0.0830	3.5	6.2	1 1/2 x 2 1/4	DCM602U010AA2B
*7200	0.1100	0.0710	3.7	6.4	1 3/4 x 2 1/4	DCM722U010AA2B
17000	0.0510	0.0350	4.8	7.1	1 3/4 x 1 1/2	DCM173U010AK2B
25000	0.0350	0.0240	6.2	9.0	1 3/4 x 2 1/4	DCM253U010AA2B
29000	0.0510	0.0350	4.8	7.1	1 3/4 x 1 1/2	DCMX293U010AK2B
36000	0.0240	0.0170	7.7	10.8	1 3/4 x 2 1/4	DCM363U010AH2B
43000	0.0300	0.0210	6.7	9.6	1 3/4 x 2 1/4	DCMX433U010AA2B
47000	0.0190	0.0130	8.8	12.1	1 3/4 x 3 1/4	DCM473U010AB2B

* Stock Rating

Best-Value Table

Here's how to decide which screw-terminal capacitor is best for your application. Our capacitor types are ranked below on six characteristics. 100% is the best score, and all lower-scoring types are ranked against the 100% best type.

Select types for review which have high scores on your most important characteristics and then compare specifications to make your final choice. For other characteristics and product strengths, refer to the Application Chart in this section.

You can get combination rankings by multiplying scores together. As an illustration, suppose that you want to rank our types by lowest cost ripple capability. Just multiply the low cost score by the high ripple current score to find that the Type 500R is the best value with a score of 67.2%. ($0.84 \times 0.80 = 0.672$ or 67.2%) compared to the 550's next-best score of 65%. ($1.00 \times 0.65 = 0.65$ or 65%).

Type	High Capacitance	Low ESR	Low Hi-Frequency Impedance	High Ripple Current	Long Life	Low Cost
DCM	61%	65%	94%	56%	10%	100%
DCMX	100%	65%	94%	56%	10%	87%
500	58%	25%	83%	69%	25%	85%
500X	88%	19%	83%	69%	25%	74%
500R	87%	21%	83%	84%	27%	80%
550	67%	79%	94%	100%	23%	65%
101	51%	93%	94%	89%	36%	63%
101X	87%	93%	94%	89%	36%	55%
139R	6.2%	100%	100%	47%	10%	83%
125	5.8%	60%	97%	49%	100%	23%

High Capacitance

100% means highest available capacitance.

Low ESR

100% means lowest ESR per unit capacitance and is most representative of low voltage ratings.

Low Hi-Frequency Impedance

100% means lowest impedance at 10 to 20 kHz.

High Ripple Current

100% means highest available ripple current.

Long Life

100% means longest life based on life test capability and dc leakage current and adjusted for extended-life test data.

Low Cost

100% means lowest 1000 piece price per unit capacitance and is most representative of 10,000 uf and 10 Vdc.

Not for new design use DCMC series

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cornell Dubilier:](#)

[DCM952U075EB2PC](#)