


# Gumstix Jetson Nano/Xavier NX FastFlash

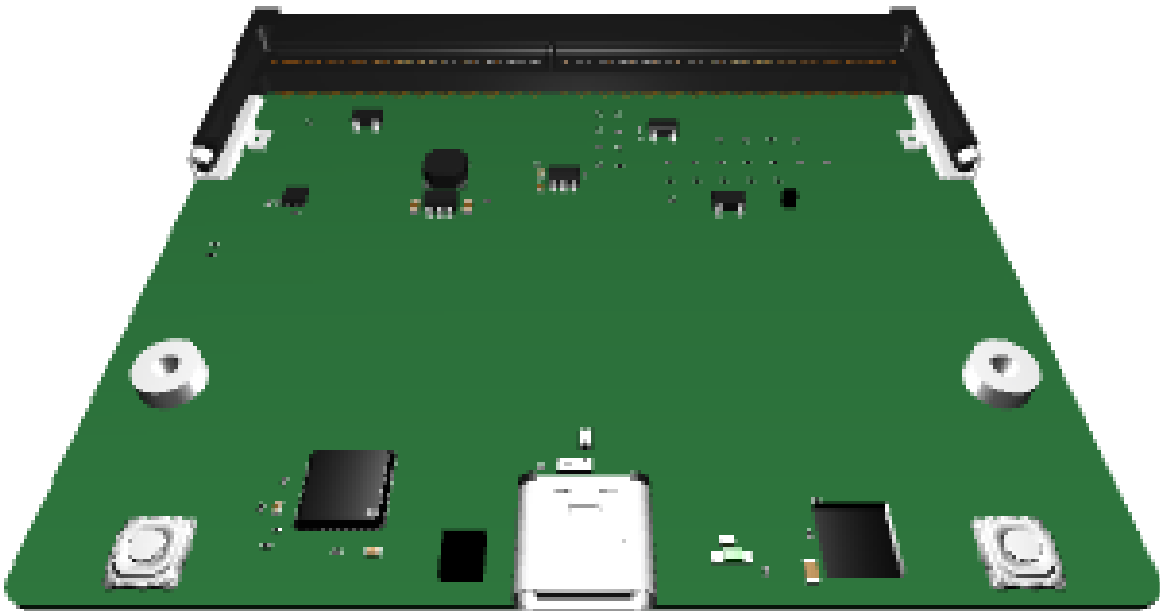

**This board was designed and built by Geppetto**

Free automated documentation anytime.  
Design for free @ <https://geppetto.gumstix.com/>

No Minimum Order

Automated Supply Chain

Reduce Cost and Errors




**geppetto**  
by gumstix™

**Thanks for using Geppetto to design this board!**

*One Stop Design-to-Order*

Simply place displays, sensors, processors, and Geppetto connects it all.  
No routing needed.

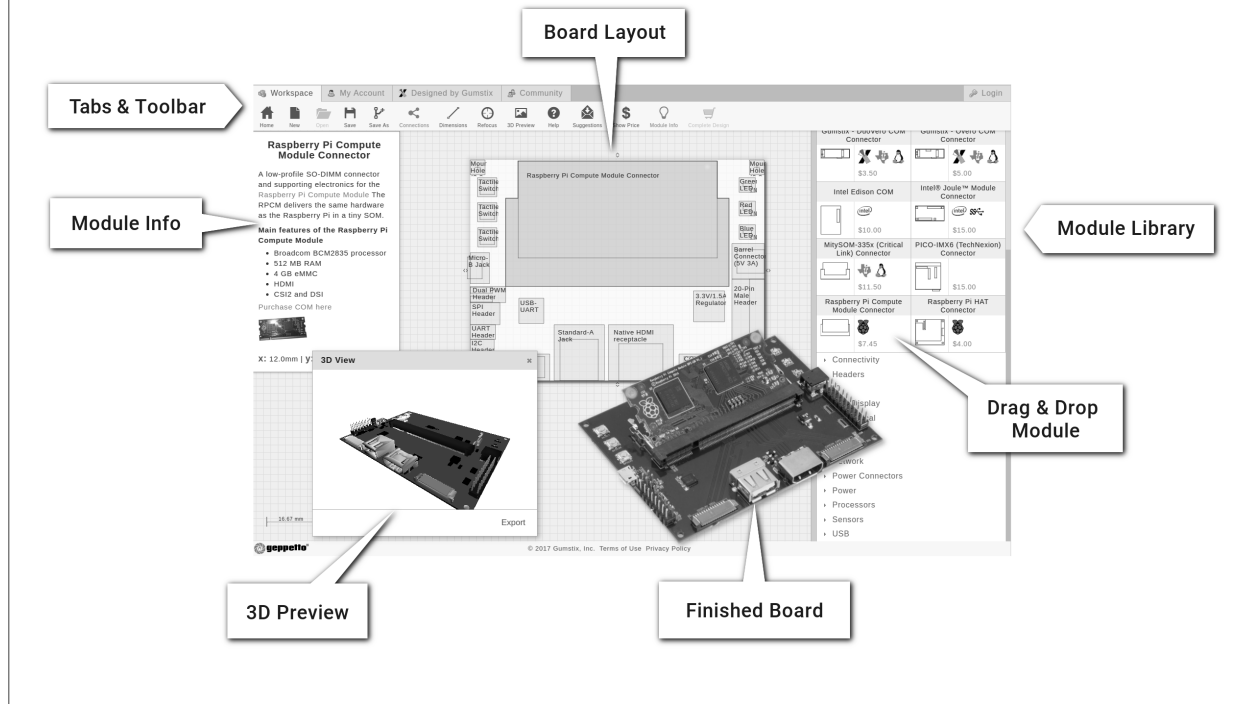

Gumstix, Inc. shall have no liability of any kind, express or implied, arising out of the use of the Information in this document, including direct, indirect, special or consequential damages.

Gumstix, Inc. may have patents, patent applications, trademarks, copyrights, trade secrets or other intellectual property rights pertaining to Gumstix products described in this document (collectively "Gumstix Intellectual Property").

Except as expressly provided in any written license or agreement from Gumstix, Inc., this document and the information contained therein does not create any license to Gumstix's Intellectual Property.

The Information contained herein is subject to change without notice. Revisions may be issued regarding changes and/or additions.

Copyright © 2020, Gumstix, Inc. All rights reserved.

## Board Description

Uses NVIDIA Jetson Nano or Xavier NX COM Connector as its COM/processor.

Functional modules include:

USB-C Jack


USB-UART

3-Port USB Client Hub


## Board Dimensions

7.5cm x 6.6cm

### Geppetto Makes Hardware Easy

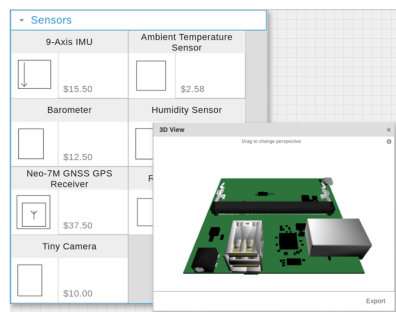

**Custom Library and  
3D Design Preview**

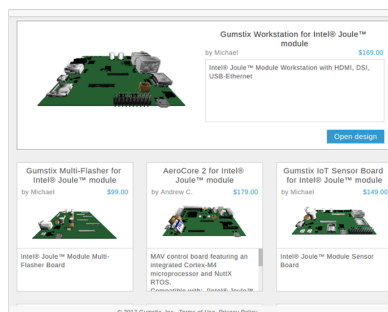

**Design and Save  
Your Work Online**




**Free Automated  
Documentation on Demand**

Start your next design at [geppetto.gumstix.com](http://geppetto.gumstix.com)

# Contents

|          |                                                      |          |
|----------|------------------------------------------------------|----------|
| <b>1</b> | <b>Modules on Board</b>                              | <b>1</b> |
| 1.1      | COM Connectors . . . . .                             | 1        |
| 1.1.1    | NVIDIA Jetson Nano COM Connector (v11) (1) . . . . . | 1        |
| 1.2      | Converters . . . . .                                 | 2        |
| 1.2.1    | USB-UART (v21) (2) . . . . .                         | 2        |
| 1.3      | Lights and Switches . . . . .                        | 2        |
| 1.3.1    | Tactile Switch (v22) (3) . . . . .                   | 2        |
| 1.3.2    | Tactile Switch (v22) (4) . . . . .                   | 2        |
| 1.3.3    | Top-side LED (v12) (7) . . . . .                     | 2        |
| 1.4      | USB . . . . .                                        | 3        |
| 1.4.1    | 3-Port USB Client Hub (v6) (5) . . . . .             | 3        |
| 1.4.2    | USB Type-C PD (5V) (v1) (8) . . . . .                | 3        |
| 1.5      | Power . . . . .                                      | 3        |
| 1.5.1    | 3.3V/0.15A LDO (v7) (6) . . . . .                    | 3        |
| <b>2</b> | <b>Module Connections Graph</b>                      | <b>4</b> |
| <b>3</b> | <b>Module Power Graph</b>                            | <b>5</b> |

# 1 Modules on Board

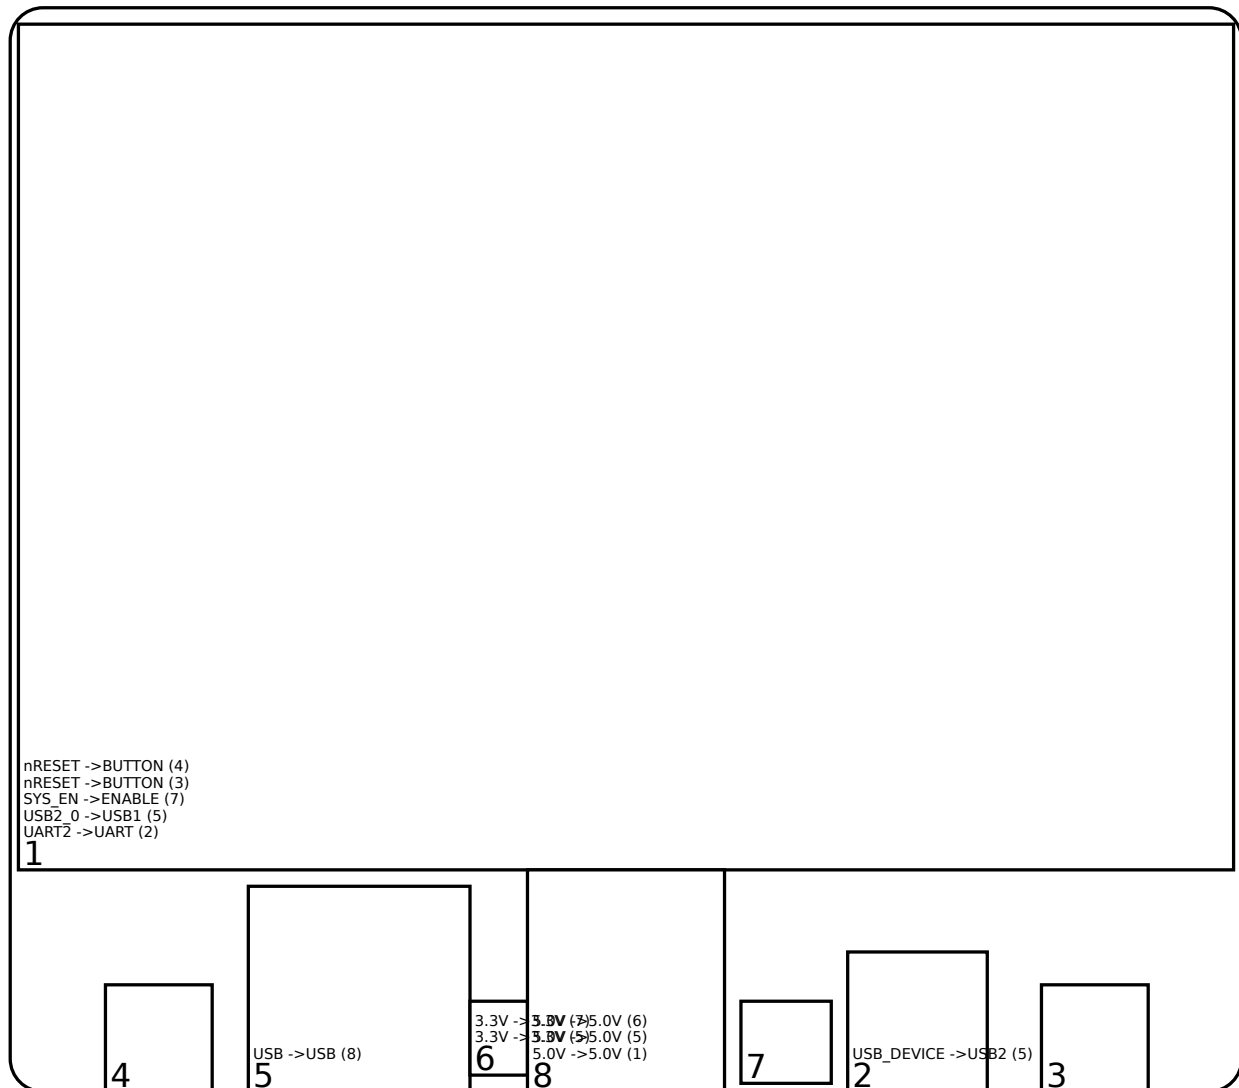

## 1.1 COM Connectors

### 1.1.1 NVIDIA Jetson Nano COM Connector (v11) (1)

The NVIDIA Jetson Nano brings Artificial Intelligence to devices at the edge. Bringing this powerful system to smaller devices allows for advanced robotics, intelligent cameras and complex data analysis, all without needing a connection to the internet.

Check out the full capabilities at <https://developer.nvidia.com/embedded-computing>

The NVIDIA® Jetson™ module connector receives:

- 5.0V from USB Type-C PD (5V) (8)

The NVIDIA® Jetson™ module connector provides the following outputs:

- UART2 to USB-UART (2)
- USB2.0 to 3-Port USB Client Hub (5)
- SYS\_EN to Top-side LED (7)
- nRESET to:
  - Tactile Switch (3)
  - Tactile Switch (4)

## 1.2 Converters

### 1.2.1 USB-UART (v21) (2)

Also known as an FTDI, this USB to UART converter allows a USB connection to the board to behave as a virtual RS232 serial connection. It offers direct and complete access to the system from a development machine by way of the FTDI FT232RQ USB – UART IC.

Technical documentation for the FT232RQ is available at:

[http://www.ftdichip.com/Support/Documents/DataSheets/ICs/DS\\_FT232R.pdf](http://www.ftdichip.com/Support/Documents/DataSheets/ICs/DS_FT232R.pdf)

This USB to UART converter connects a host machine from 3-Port USB Client Hub (5) to UART2 on NVIDIA Jetson Nano COM Connector (1).

## 1.3 Lights and Switches

### 1.3.1 Tactile Switch (v22) (3)

This 4.9 sq. mm pull-down touch switch provides a user input for the signal nRESET on NVIDIA Jetson Nano COM Connector (1).

### 1.3.2 Tactile Switch (v22) (4)

This 4.9 sq. mm pull-down touch switch provides a user input for the signal nRESET on NVIDIA Jetson Nano COM Connector (1).

### 1.3.3 Top-side LED (v12) (7)

The top-side LED module contains a 1608 standard size LED of a user-selected color, mounted on the top side of a Geppetto board.

The LED is active-high on SYS\_EN from NVIDIA Jetson Nano COM Connector (1).

## 1.4 USB

### 1.4.1 3-Port USB Client Hub (v6) (5)

The 3-port USB client hub module offers three interfaces for on-board USB client devices to a single USB device port using the Microchip USB2513 USB 2.0 Hi-speed Hub Controller.

The datasheet for the USB2513 IC is available at:

<http://ww1.microchip.com/downloads/en/DeviceDoc/00001692C.pdf>

The USB client hub links: USB on USB Type-C PD (5V) (8);  
to the following USB device ports:

- USB2\_0 on NVIDIA Jetson Nano COM Connector (1)
- USB\_DEVICE on USB-UART (2)

### 1.4.2 USB Type-C PD (5V) (v1) (8)

A USB Type-C port allows your design to connect as a USB 2.0 and provides up to 3A @ 5.0V.

This port is connected to USB on 3-Port USB Client Hub (5).

## 1.5 Power

### 1.5.1 3.3V/0.15A LDO (v7) (6)

This efficient and precise low-voltage low-dropout DC regulator is optimized for ultra-low noise applications. The module's Micrel MIC5255-3.3YM5-TR provides power to noise-sensitive modules that require a 3.3V input.

The datasheet for the Micrel MIC5255-3.3YM5-TR is available at:

<http://media.digikey.com/pdf/Data%20Sheets/Microchip%20PDFs/MIC5255.pdf>

This LDO regulator receives 5.0V from USB Type-C PD (5V) (8) and provides 3.3V DC to:

- 3-Port USB Client Hub (5)
- Top-side LED (7)

## 2 Module Connections Graph


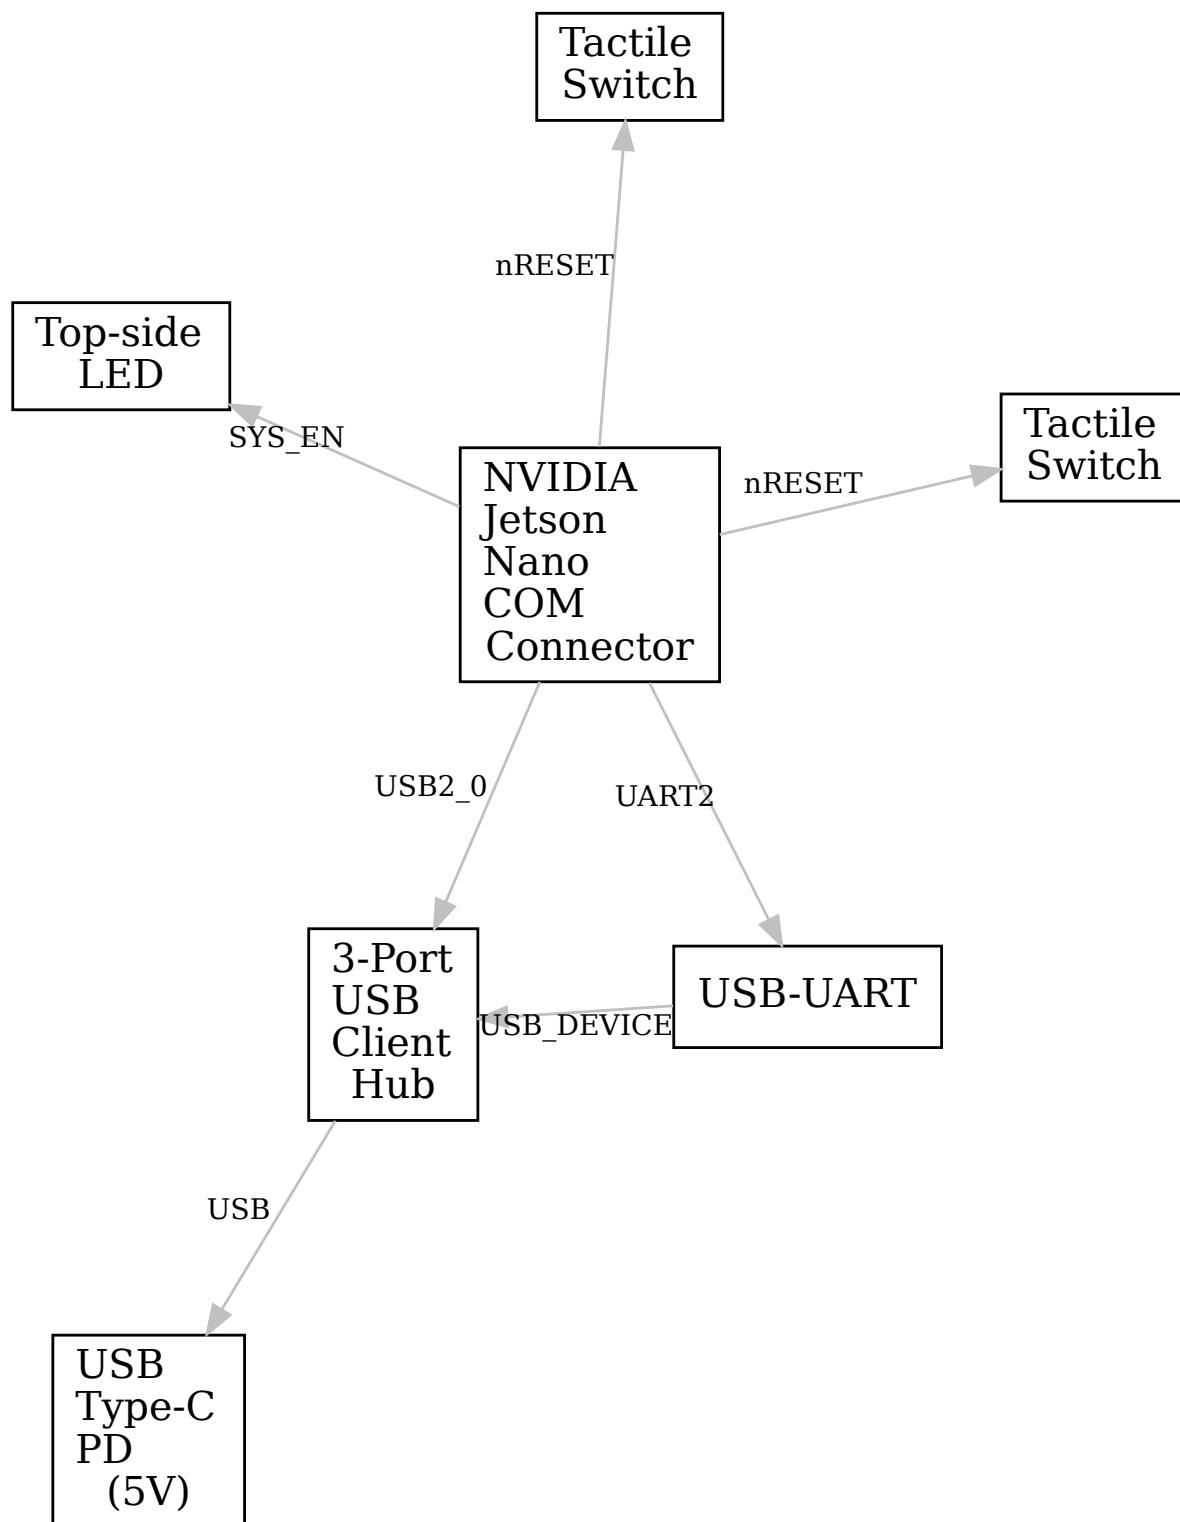


Figure 1: excludes power modules

### 3 Module Power Graph

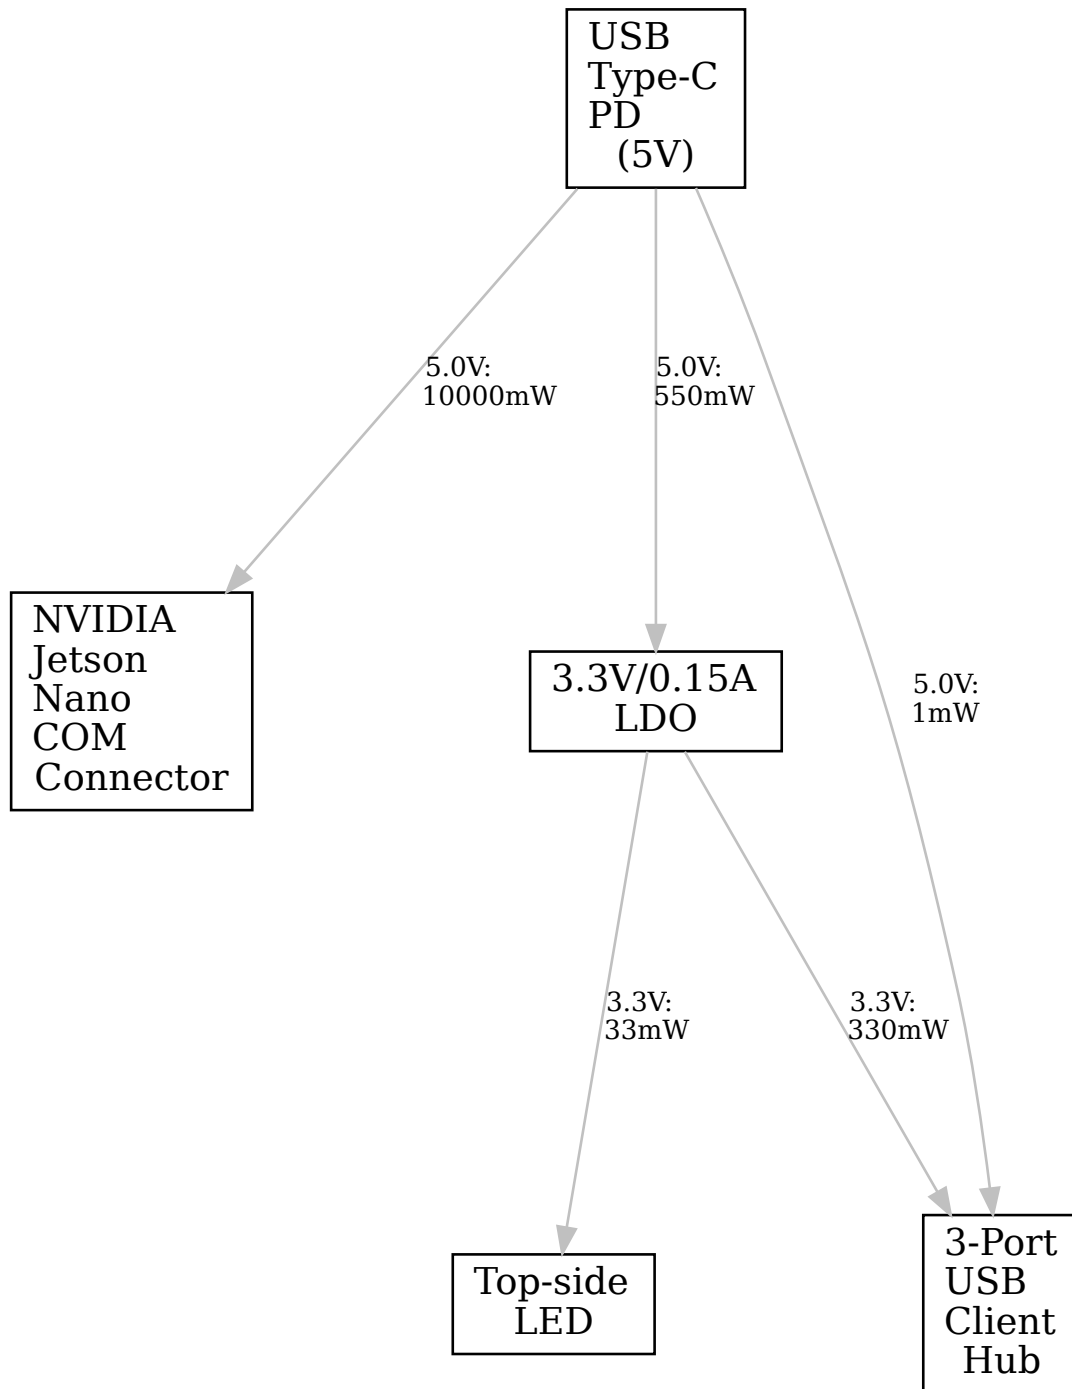

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Gumstix:](#)

[PKG900000001186](#)