


GTVA104001FA

Thermally-Enhanced High Power RF GaN on SiC HEMT
400 W, 50 V, DC - 1.4 GHz

Description

The GTVA104001FA is a 400-watt GaN on SiC high electron mobility transistor (HEMT) for use in the DC - 1.4 GHz frequency band. It features input matching, high efficiency, and a thermally-enhanced surface-mount package with earless flange.

GTVA104001FA
Package H-37265J-2

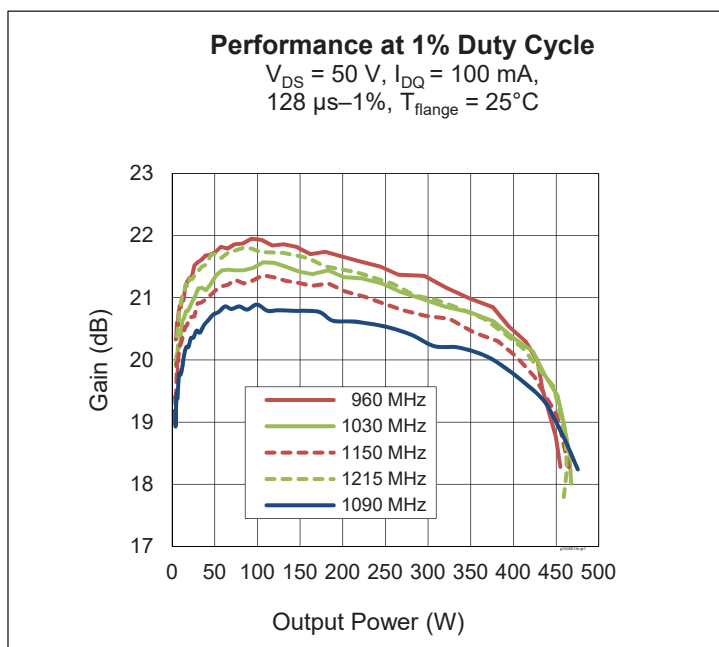

Features

- GaN on SiC HEMT technology
- Input matched
- Typical pulsed CW performance: pulse width = 128 μs , duty cycle = 10%, DC - 1.4 GHz, $V_{DS} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$
 - Output power = 400 W
 - Drain Efficiency = 70 %
 - Gain = 19 dB
- Human Body Model Class 2 (per ANSI/ESDA/JEDEC JS-001)
- Capable of handling 10:1 VSWR (all phase angles) at $V_{DS} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$, $f = 1090\text{ MHz}$, $P_{OUT} = 400\text{ W}$ peak
- Pb-free and RoHS compliant

RF Characteristics

Pulsed RF Performance Specifications (tested in Wolfspeed production Doherty test fixture)

$V_{DD} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$, $P_{OUT} = 390\text{ W}$ peak, $f = 1030\text{ MHz}$, 128 μs pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	18.5	19.5	21.5	dB
Drain Efficiency	η_D	73	77	—	%

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!



DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = -8\text{ V}$, $I_D = 10\text{ mA}$	$V_{(BR)DSS}$	150	—	—	V
Drain-source Leakage Current	$V_{GS} = -8\text{ V}$, $V_{DS} = 10\text{ V}$	I_{DSS}	—	—	5.8	mA
Gate Threshold Voltage	$V_{DS} = 10\text{ V}$, $I_D = 42\text{ mA}$	$V_{GS(th)}$	-3.8	-3.0	-2.3	V

Recommended Operating Conditions

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Drain Operating Voltage		V_{DD}	0	—	50	V
Gate Quiescent Voltage	$V_{DS} = 48\text{ V}$, $I_D = 0.11\text{ A}$	$V_{GS(Q)}$	—	-2.8	—	V

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	V_{DSS}	125	V
Gate-source Voltage	V_{GS}	-10 to +2	V
Gate Current	I_G	20	mA
Drain Current	I_D	4.6	A
Junction Temperature	T_J	225	°C
Storage Temperature Range	T_{STG}	-65 to +150	°C

Operation above the maximum values listed here may cause permanent damage. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the component. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. For reliable continuous operation, the device should be operated within the operating voltage range (V_{DD}) specified above.

Thermal Characteristics

$T_{FLANGE} = 70^\circ\text{C}$, $P_{DISS} = 100\text{ W}$, $V_{DD} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$, 400 W (peak), 1030 MHz, 128 μs pulse width, 10% duty cycle

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.14	°C/W

Ordering Information

Device:

Type and Version	Order Code	Package	Shipping
GTVA104001FA V1 R0	GTVA104001FA-V1-R0	H-37265J-2, earless flange	Tape & Reel, 50 pcs
GTVA104001FA V1 R2	GTVA104001FA-V1-R2	H-37265J-2, earless flange	Tape & Reel, 250 pcs

Evaluation Board:


Type and Version	Frequency	Description
LTN/GTVA104001FA-V1	DC - 1.4 GHz	Class AB, Rogers 3010, 0.64 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$



Typical Performance (data taken in Wolfspeed production test fixture)


Performance at 10% Duty Cycle

$V_{DS} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$,
 $128\text{ }\mu\text{s}$ –10%, $T_{\text{flange}} = 25^{\circ}\text{C}$

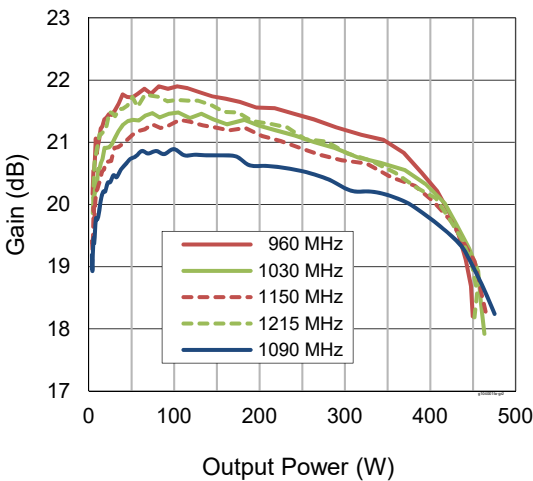


Input Return Loss

$V_{DS} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$,
 $P_{OUT} = 400\text{ W}_{\text{PEAK}}$, $128\text{ }\mu\text{s}$ –10%

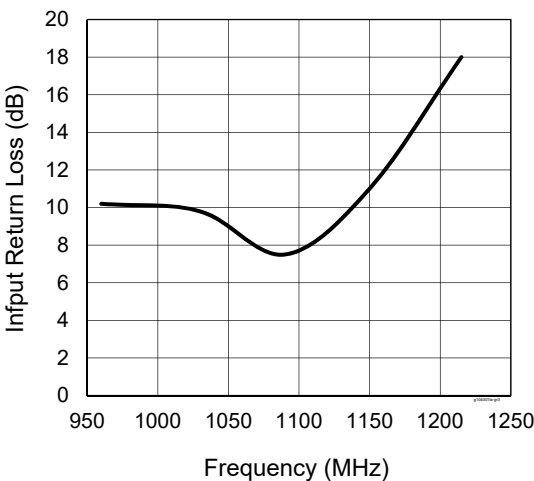

Drain Efficiency

$V_{DS} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$,
 $P_{OUT} = 400\text{ W}_{\text{PEAK}}$, $128\text{ }\mu\text{s}$ –10%

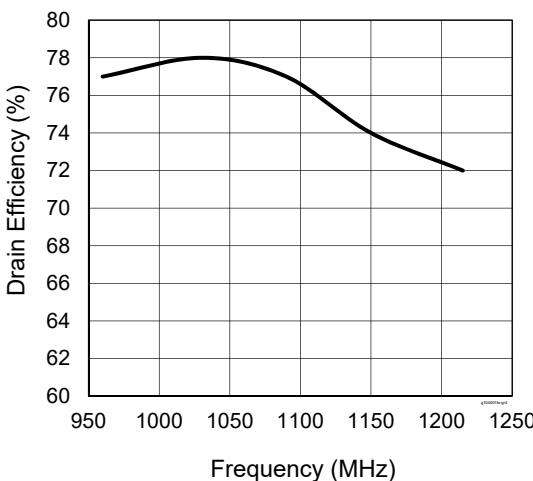



Load Pull Performance

Pulsed CW signal: 16 μ sec, 10% duty cycle, 50 V, 100 mA, class AB

		P _{3dB}														
		Max Output Power					Max PAE					Z Optimum				
Freq [MHz]	Z _s [Ω]	Z _l [Ω]	Gain [dB]	PAE [%]	P _{OUT}		Z _l [Ω]	Gain [dB]	PAE [%]			Z _l [Ω]	Gain [dB]	PAE [%]		
960	0.38 – j2.87	3.22 – j1.38	18.89	70.9	56.99	500	4.11 – j0.9	19.60	73.5	56.40	437	5.19 – j0.35	19.72	74.6	55.61	364
1030	0.61 – j3.12	2.08 + j0.09	18.88	64.7	56.75	473	3.35 + j0.1	19.30	72.6	56.00	398	4.31 + j0.38	19.75	72.4	55.61	364
1090	0.74 – j3.26	2.32 – j0.15	18.71	65.7	56.78	476	3.21 + j0.07	19.35	71.7	56.40	437	3.94 + j0.32	19.46	72.9	55.98	396
1150	1.29 – j4.30	2.79 – j0.45	18.51	68.4	56.83	482	3.56 + j0.17	19.00	73.4	56.50	447	4.44 + j0.47	19.27	73.2	55.75	376
1215	1.89 – j4.87	2.65 – j0.76	18.47	65.1	56.79	478	3.60 – j0.51	18.95	69.5	56.40	437	4.80 + j0.11	19.02	72.2	55.65	367




Reference Circuit tuned for 960 to 1215 MHz

Reference Circuit Assembly

DUT	GTVA104001FA V1
Test Fixture Part No.	LTN/GTVA104001FA-V1
PCB	Rogers 3010, 0.64 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$

Find Gerber files for this test fixture on the Wolfspeed Web site at <http://www.wolfspeed.com/RF>

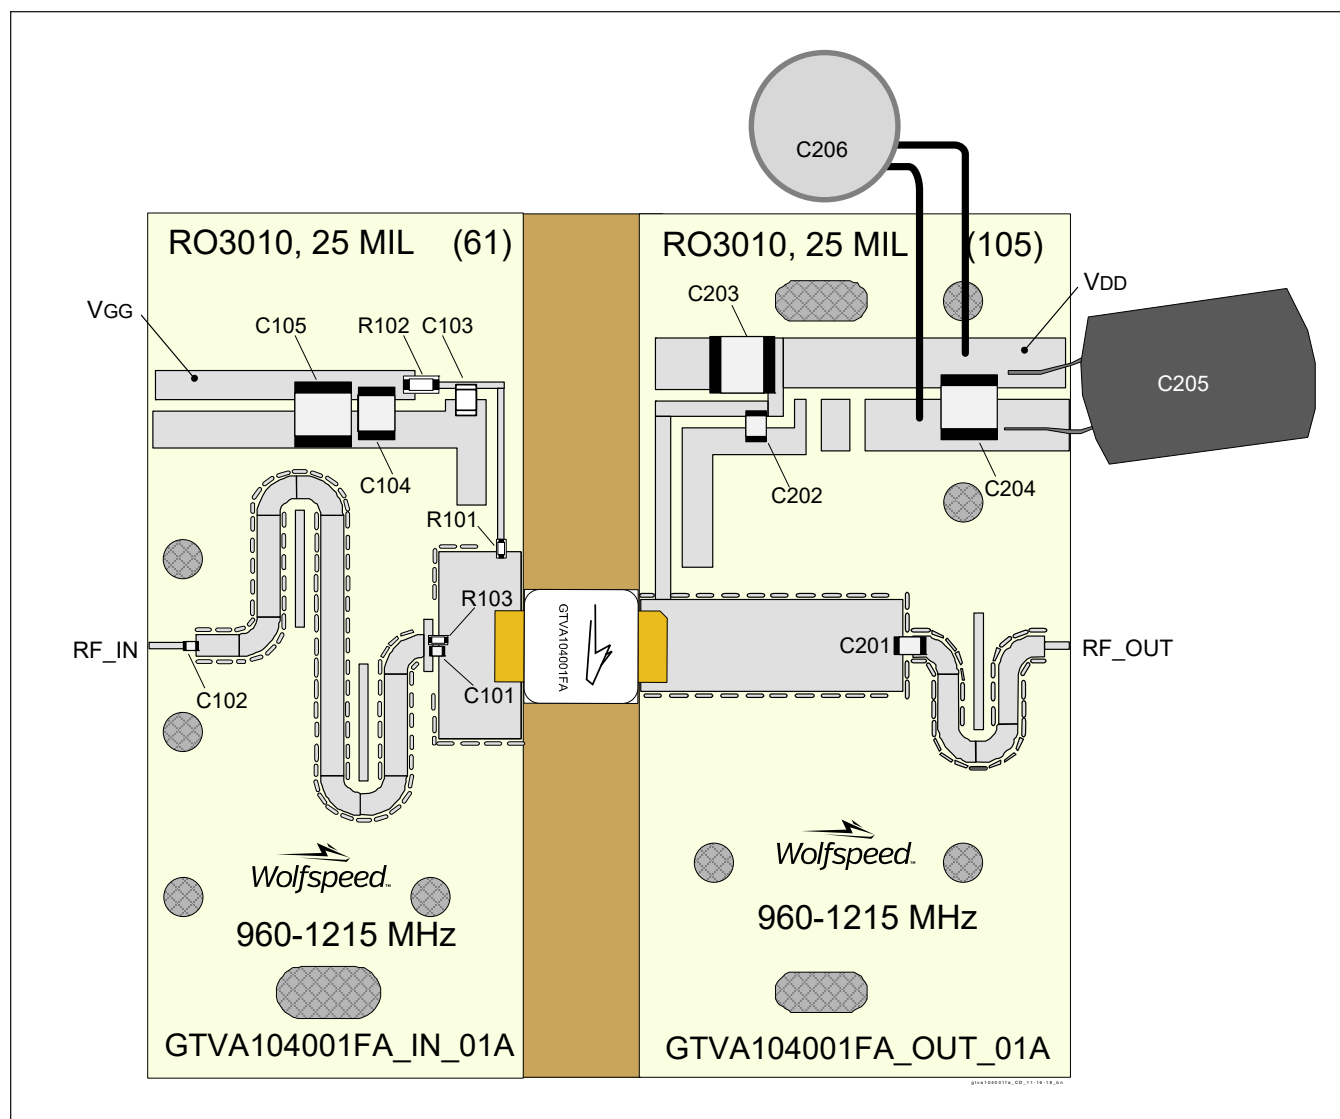

Assembly diagram (not to scale)




Reference Circuit (cont.)

Components Information

Component	Description	Manufacturer	P/N
Input			
C101, C102	Capacitor, 56 pF	ATC	ATC100A560JW150XB
C103	Capacitor, 56 pF	ATC	ATC100B560JW500XB
C104	Capacitor, 1 µF	TDK Corporation	C4532X7R2A105M230KA
C105	Capacitor, 10 µF	TDK Corporation	C5750X5R1H106K230KA
R101, R103	Resistor, 10 ohms	Panasonic – ECG	ERJ-3GEYJ100V
R102	Resistor, 5.6 ohms	Panasonic – ECG	ERJ-8RQJ5R6V
Output			
C201, C202	Capacitor, 10 pF	ATC	ATC100B560JW500XB
C203, C204	Capacitor, 10 µF	TDK Corporation	C5750X5R1H106K230KA
C205	Capacitor, 220 µF	Panasonic Electronic Components	ECA-2AHG221
C206	Capacitor, 3300 µF	Nichicon	UVR2A332MRD

Pinout Diagram (top view)

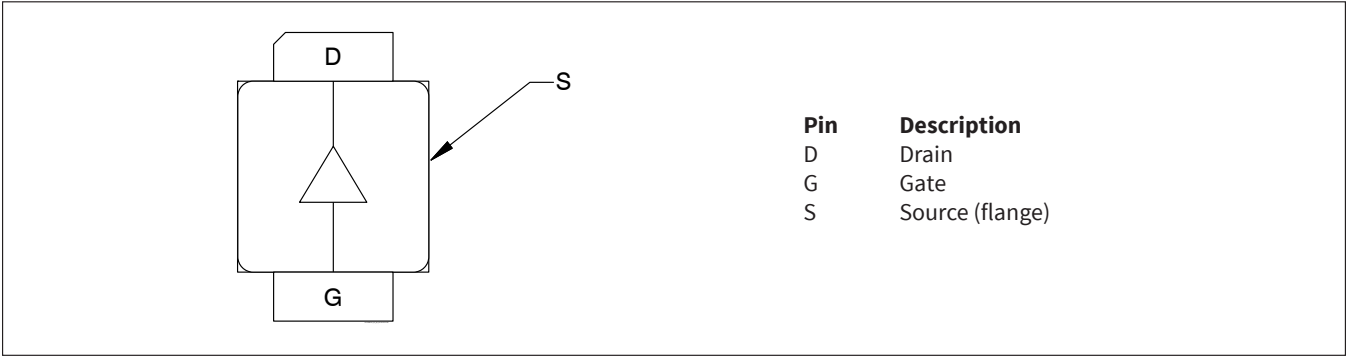



Package Outline Specifications

Package H-37265J-2

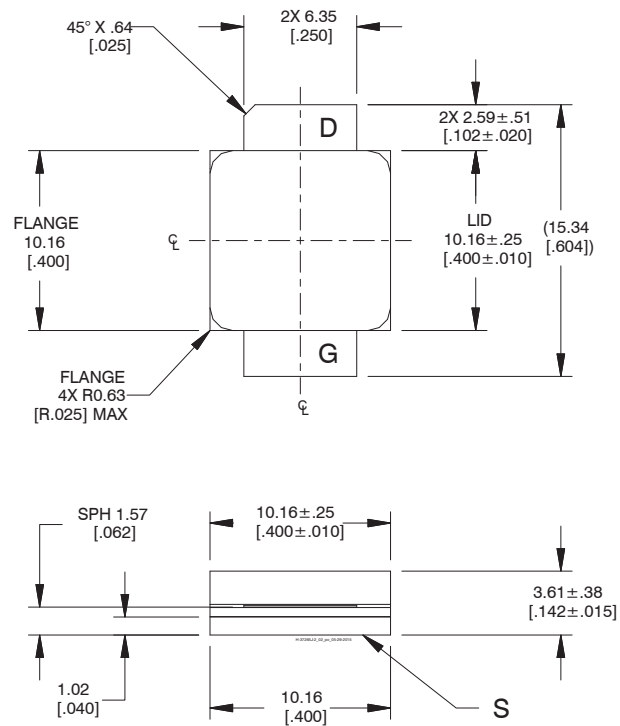


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [.005] unless specified otherwise.
4. Pins: D – drain; G – gate; S – source.
5. Lead thickness: $0.10 + 0.051/-0.025$ mm [.004 +0.002/-0.001 inch].
6. Gold plating thickness: 1.14 ± 0.38 micron [45 ± 15 microinch].

Revision History

Revision	Date	Data Sheet	Page	Subjects (major changes at each revision)
01	2016-05-03	Advance	All	Proposed specifications for new product development
02	2018-05-08	Advance	All	Converted to Wolfspeed Data Sheet, updated DC and thermal characteristics
03	2018-11-14	Production	All	Showing released product specifications, including updated characteristics tables, performance graphs, reference circuit information
03.1	2019-02-21	Production	3	Added "Wolfspeed" to Performance heading.

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wolfspeed:](#)

[LTN/GTVA104001FA-V1](#)