


# OptiSpot Reflector Ø 92 mm - Wide Flood

35.850 · OptiSpot Reflector for use with COB connectors **47.319** and **47.360** with Ø 50 mm

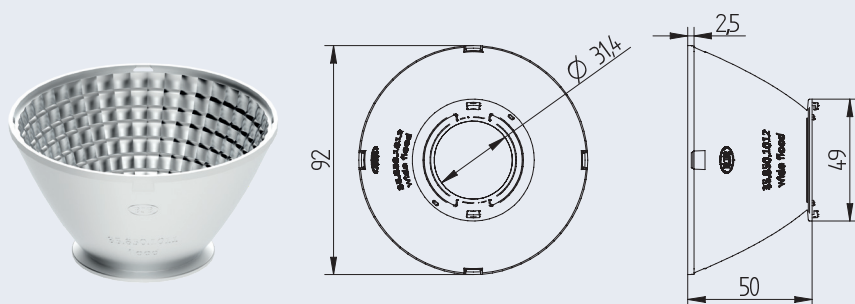

pkg.	wt.	part no.
16	32 g	<b>35.850.1012.50</b>

## OptiSpot Reflector Ø 92 mm - Wide Flood

Bayonet fixing by Twist & Lock action

Material: PC, Aluminium coated

Light distribution: Wide Flood

Reflector is optimized for use with connectors **47.319.2013 / 2021 / 2025 / 2026 / 2345** and **47.360.5010.50** with Ø 50 mm.\*


- Reflector interface is adapted to the mixing cone of the connector
- Possibly visually disruptive openings of the connector are partly covered

Wir empfehlen den Einsatz von COB's mit LES < 17 mm


Please do not touch the reflector inside with bare fingers.

\*The reflector can also be combined with further connectors. Please contact us.

It should be noted that the upper cone diameter of the mixing chamber of the connector must be smaller than the opening diameter of the reflector (here Ø 31.4 mm), so that a undercut is avoided (picture on the right).

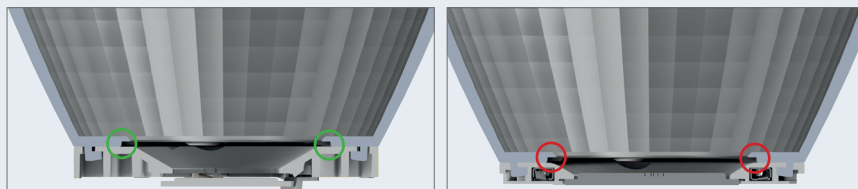

100°C CAD

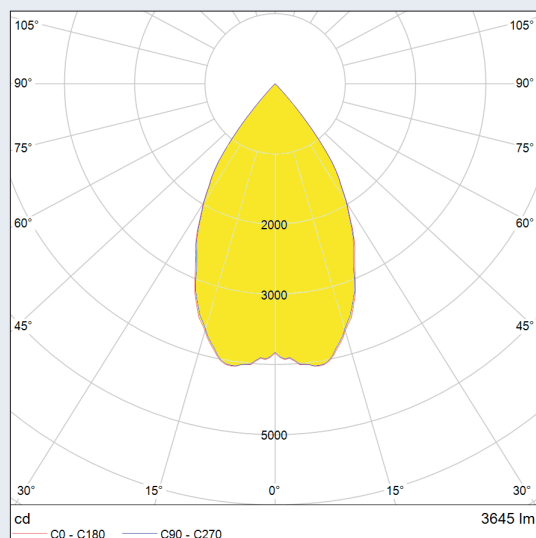

Beam angle (FWHM) measured with Citizen CLU38 and connector **47.319.2025.50**.

Beam angle (FWHM): 61°  
Efficiency: 89%

Beam angle depends on used COB and its LES.

OptiSpot Reflector Ø 92 mm - Wide Flood

35.850 · 35.908 · Accessories and modular system

Accessories:



Cover plate  
35.908.1007.85



Diffusor plate  
35.908.1007.89



Diffusor lens  
35.908.1003.89



Cover plate  
47.950.-408.85



Connector Ø50 mm

Effect on beam angle and efficiency of the reflector when combined with a cover plate, diffusor plate or diffusor lens (measured with COB Citizen CLU038 and connector 47.319.2025.50). The values are for reference only.

Beam angle (FWHM) reflector 35.850.1012.56	Efficiency reflector 35.850.1012.56	Beam angle with cover plate 35.908.1007.85	Efficiency with cover plate 35.908.1007.85
61°	89%	62°	86%
		Beam angle with diffusor plate 35.908.1007.89	Efficiency with diffusor plate 35.908.1007.89
		62°	86%
		Beam angle with diffusor lens 35.908.1003.89	Efficiency with diffusor lens 35.908.1003.89
		69°	87%
		Beam angle with cover plate 47.950.-408.85	Efficiency with cover plate 47.950.-408.85
		62°	86%

Modular system



Cover or diffusor plate





Diffusor lens





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[BJB Electric:](#)

[35.850.1012-001-03](#)