
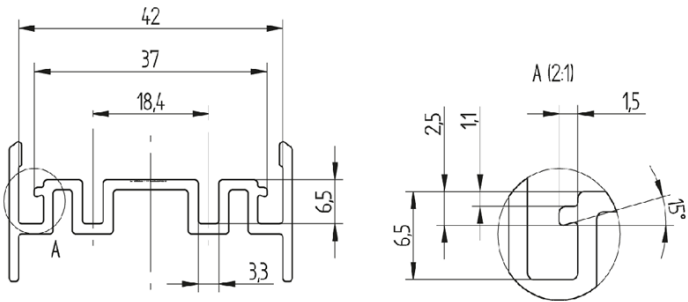
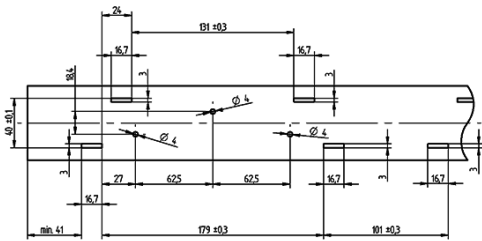
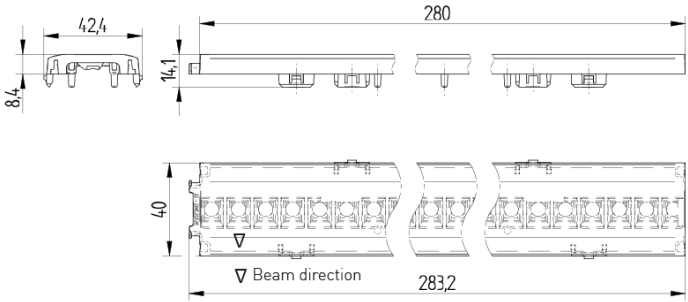
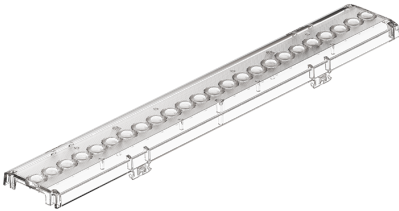



OptiLine Performance - wide

35.324.1003.85

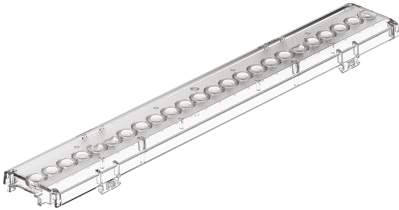

CAD

110°C



0,5 - 1,0 mm

OptiLine Performance - wide

35.324.1003.85



DESCRIPTION

Suitable for LED modules Philips Fortimo Strip OC from 280 mm (1ft) to 1450 mm (5ft)

Push-in fixing into luminaire metal sheet or aluminium profile

Centering pins for mounting and optimal alignment of optics and LED module

Centering pins als for anti-twist protection and fixing of LED modules

Uniform contact pressure of the LED module by integrated spacer pins

Key and slot system for a gapless assembly of the optics

Only one end cap for both ends

- Improved visibility and contrast of the illuminated areas

- Good and uniform light distribution

- Reduced glare

| | |
|------------------------|--|
| Product name: | OptiLine Performance - wide |
| Short description: | Pitch dependent single row optic - Wide - 1-Click-Fixation: Fixing of LED module and optic in one step |
| Range of applications: | Linear- and panel lights Office: Work place lighting and corridor lighting Shop: General lighting and corridor lighting Industry: Park stores, department stores and warehouses Public applications: Corridors and stairways |
| Beam angle: | 89° (Philips Fortimo LED Strip OC) |
| Light Distribution: | Wide-beamed |
| Mounting method 1: | Snap-in mounting |
| Material: | PC |
| Length: | 283 mm |
| Width: | 40 mm |
| Height: | 8,4 mm |
| Operating temperature: | max. 110 °C |
| Utility film: | https://youtu.be/1DNfsMp1Op4 |
| Surface: | Micro structure |
| Optical efficiency: | 96,3 % (Philips Fortimo LED Strip OC) |
| Suitable for: | Philips Fortimo LED Strip OC |
| Color: | clear |
| Weight: | 37 |
| Pkg.: | 84 |