

NX2520SG

For Mobile Communications

■ Features

- Crystal Unit with built-in Thermistor construction.
- Minimize circuit design space by combining crystal unit into one component.
(Presently, Crystal unit and temperature sensor is mounted in one board separately.)
- Placing temperature sensor(Thermistor) close to Crystal blank in one airtight housing can detect more precise crystal blank temperature. Improvement on frequency temperature compensation compared to present Crystal unit.
- Single cavity housing which is ideal to module applications.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.



Pb Free

RoHS Compliant
Directive 2011/65/EU


■ Specifications

Item	Model	NX2520SG
Nominal Frequency		19.2 to 54 MHz
Overtone Order		Fundamental
Frequency Tolerance (30 ± 3°C)		±10 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +30 °C)		±12 × 10 ⁻⁶
Operating Temperature Range		-30 to +85 °C
Storage Temperature Range		-40 to +85 °C
Equivalent Series Resistance		Refer to *1
Level of Drive		10 μW (Max. 100 μW)
Load Capacitance		7 pF
Specifications Number		STD-CTX-1

NTC Thermistor for Temperature Sensor

Dimensions	0.6 × 0.3 × 0.3 mm
Resistance [R25]	100k Ω ± 1 %
B-Constant [B25-50]	4250K ± 1 %

■ Dimensions

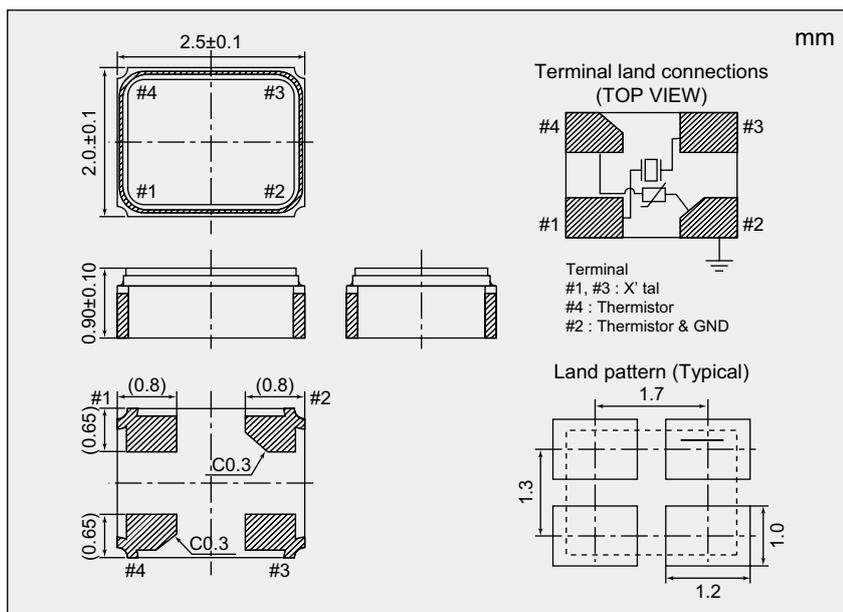

*2 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
19.2 to 20	70
20 to 40	50
40 to 54	40

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NDK:

[NX2520SG-19.2M-STD-CTX-1](#)