Specification of Crystal Unit



1 NDK PART NUMBER NX3225SA-26.000000MHz-G4

2 CHIPSET MAKER INFINEON

3 APPLICATION GSM (GPRS, EDGE)

4 CHIPSET NAME PMB6258

5 Type NX3225SA

6 Electrical characteristics

6.1 Nominal frequency(F0)6.2 Overtone order26.000MHzFundamental

6.3 Adjustment tolerance $\pm 10 \times 10^{-6}$ max. (+25 °C)

6.4 Tolerance over the temperature range $\pm 10 \times 10^{-6}$ max. (-20~+70 °C) The reference temperature shall be +25 °C.

 $\begin{array}{lll} 6.5 & \mbox{Equivalent resistance (R1)} & 50 \Omega \mbox{ max.} \\ 6.6 & \mbox{Shunt Capacitance (C0)} & 1.22 \mbox{pF+/-}15 \% \\ 6.7 & \mbox{Motional Capacitance (C1)} & 4.92 \mbox{fF+/-}15 \% \\ \end{array}$

7 Measurement circuit


7.2 Frequency measurement

7.1.1 Measuring instrument π circuit 7.1.2 Load capacitance(CL) 10pF 7.1.3 Level of drive 10 μ W

7.2 Equivalent resistance measurement

7.2.1 Measuring instrument π circuit 7.2.2 Load capacitance(CL) Series 7.2.3 Level of drive 10 μ W

8 Dimension

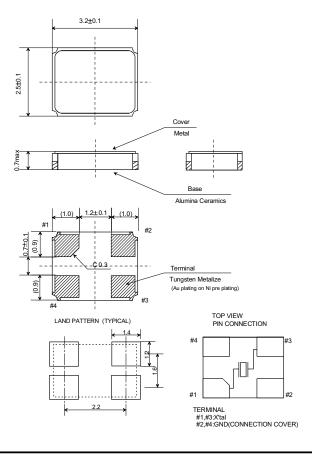

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NDK:

NX3225SA-26.000000MHZ-G4 CS00468-26M