
MLCC Low Profile



General Specifications

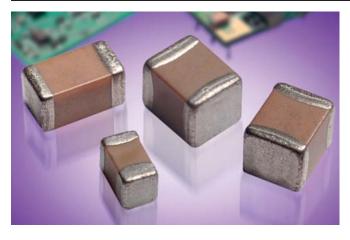


GENERAL DESCRIPTION

AVX introduces the LT series comprising a range of low profile products in our X5R and X7R dielectric. X5R is a Class II dielectric with temperature variation of capacitance within ±15% from -55°C to +85°C. Offerings include 0201, 0402, 0603, 0805 1206, and 1210 packages in compact, low profile designs. The LT series is ideal for decoupling and filtering applications where height clearance is limited.


AVX is also expanding the low profile products in our X7R dielectric. X7R is a Class II dielectric with temperature variation of capacitance within $\pm 15\%$ from -55°C to +125°C. Please contact the factory for availability of any additional values not listed.

PART NUMBER (see page 2 for complete part number explanation)

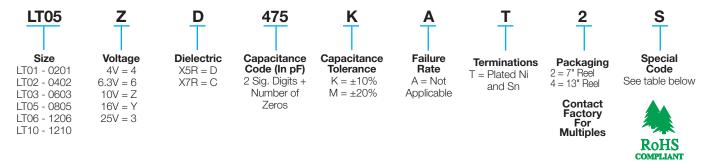

NOTE: Contact factory for availability of tolerance options for specific part numbers.

SIZE		LT01		LT02				LT03				LT05				LT06					LT10	
	WVDC	4	6.3	4	6.3	10	16	4	6.3	16	25	6.3	10	16	25	6.3	10	16	25	50	16	25
Cap	0.10	Z	Z		Q		S															
(µF)	0.22										Χ											
	0.47										Χ								Χ			
	1.0	Q		С		S				S	Х			Χ	Χ		Χ	Х	Χ	W		
	1.5																					
	2.2			S	С				S	Χ			Χ	Χ			Χ	Χ	Χ	Χ		
	4.7				С			S	Х			Χ	S	Χ			W	W	Χ	Χ	W	
	10											Χ	Χ			W	W	W	Χ		W	
	22																					
	47																					
	WVDC	4	6.3	4	6.3	10	16	4	6.3	16	25	6.3	10	16	25	6.3	10	16	25	50	16	25
SIZE		LT01		LT02				LT03				LT05				LT06					LT10	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera:

LT05YD475MAT2X LT05ZD106MAT2X