

5.0×3.2mm for Mobile Communications



RoHS Compliant

Features

- Reference frequency for telecommunication systems
- Ceramic package
- Reflow compatible

Applications

- Mobile Communications, Bluetooth®, Wireless LAN

* Bluetooth® Trademarks are owned by Bluetooth SIG Inc.

How to Order

CX5032SB 26000 H0 F L J Z1
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series ② Frequency
③ Load Capacitance ④ Frequency Tolerance

H0 12 pF **F** $\pm 10 \times 10^{-6}$

- ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability

LJ -30 to +85°C $\pm 15 \times 10^{-6}$

- ⑦ Individual Specification
(STD Specification is "Z1")

Packaging (Tape & Reel 1000 pcs./ reel)

Specifications

Item	Symbol	Specification		Units	Remarks
Frequency Range	f _{nom}	9800 to 50000	50 to 80 (MHz)	kHz	
Overtone Order	OT	Fundamental	3rd. Overtone	—	
Load Capacitance	CL	12		pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f _{tol}	±10		×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1		ohm	
Drive Level	DL	Table 2		μW	
Operating Temp. Range	T _{use}	-30 to +85		°C	
Storage Temp. Range	T _{stg}	-40 to +85		°C	
Frequency Temp. Characteristics	f _{tem}	±15		×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance

Frequency Range	Motional Series Resistance
9800≤f _{nom} <10000kHz	150Ω max.
10000≤f _{nom} <12000kHz	80Ω max.
12000≤f _{nom} <26000kHz	50Ω max.
26000≤f _{nom} <50000kHz	40Ω max.
* 50≤f _{nom} ≤80 (MHz)	80Ω max.


* 3rd Overtone

Table2 Level of Drive

Frequency Range	Level of Drive
9800≤f _{nom} ≤50000kHz	10μW (100μW max.)
50≤f _{nom} ≤80 (MHz)	

Dimensions

(Unit: mm)

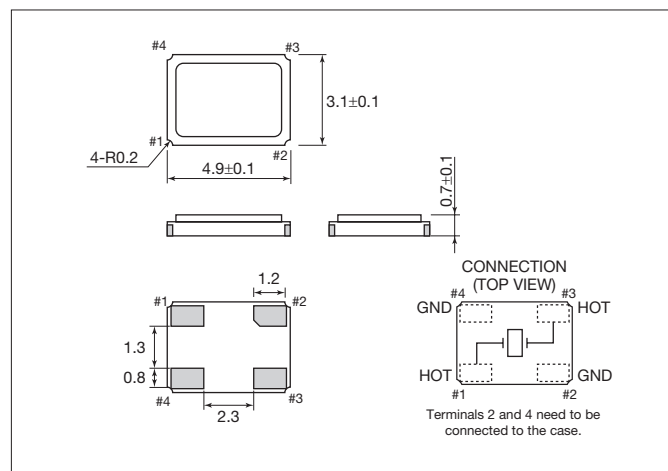

Recommended Land Pattern

(Unit: mm)

