



CMOS/ 2.5V/ 3.2×2.5mm



RoHS Compliant

Features

- Miniature ceramic package
- Highly reliable with seam welding
- CMOS output
- Supply voltage $V_{CC}=2.5V$
Lower voltage available
- $\pm 25 \times 10^{-6}$ available

Table 1

Freq. Tol. Code	$\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	± 50	-10 to +70	Standard specifications
S	± 30		
U	± 25	-40 to +85	Please contact us for available frequencies.
F	± 100		
G	± 50		
6	± 50		

How to Order

KC3225A 25.0000 C 2 □ E 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (2.5V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%)
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 2000 pcs./ reel)


Specifications

Item	Symbol	Conditions		Min.	Max.	Unit
Output Frequency Range	fo			1.5	125	MHz
Frequency Tolerance	f_tol	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Temp.: -40 to +85°C	-100	+100	×10 ⁻⁶
			Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Temp.: -10 to +70°C	-30	+30	
			Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	T_stg			-55	+125	°C
Operating Temperature Range	T_use	Standard Specifications		-10	+70	°C
		Extend (Option)		-40	+85	
Max. Supply Voltage	—			-40	+105	
Supply Voltage	Vcc	Freq. Tol. Code: 0, S, F		-0.5	+7.0	V
		Freq. Tol. Code: U, G, 6		+2.25	+2.75	V
Current Consumption (Maximum Loaded)	Icc	1.5≤fo≤26MHz		+2.38	+2.62	mA
		26<fo≤50MHz		—	4	
		50<fo≤67.5MHz		—	6	
		67.5<fo≤95MHz		—	9	
		95<fo≤125MHz		—	14	
Stand-by Current	I_std			—	18	μA
Symmetry	SYM	@50% Vcc		—	10	%
Rise/ Fall Time (10% Vcc to 90% Vcc Maximum Loaded)	Tr/ Tf	1.5≤fo≤67.5MHz		45	55	ns
		67.5<fo≤125MHz		—	6	
Low Level Output Voltage	VOL	IOL=4mA		—	4	V
High Level Output Voltage	VOH	IOH= -4mA		—	10% Vcc	V
CMOS Load	L_CMOS	CMOS Output		90% Vcc	—	pF
Input Voltage Range	VIN			—	15	V
Low Level Input Voltage	VIL			0	Vcc	V
High Level Input Voltage	VIH			—	30% Vcc	V
Disable Time	t_dis			70% Vcc	—	V
Enable Time	t_ena			—	150	ns
Start-up Time	t_str	@Minimum operating voltage to be 0 sec.		—	5	ms
1 Sigma Jitter	JSigma	Measured with Wavecrest SIA-3000	1.5≤fo≤60MHz	—	10	ms
			60<fo≤125MHz	—	8	
Peak to Peak Jitter	JPK-PK	Measured with Wavecrest SIA-3000	1.5≤fo≤60MHz	—	5	ps
			60<fo≤125MHz	—	80	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


Dimensions

(Unit: mm)

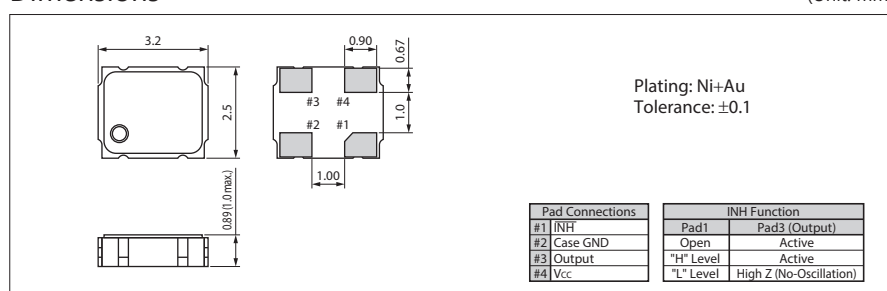

Recommended Land Pattern

(Unit: mm)

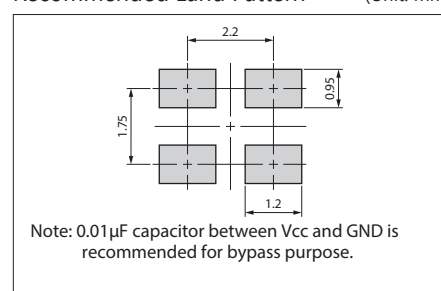

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera:

<u>KC3225A100.000C20EJB</u>	<u>KC3225A14.3182C20E00</u>	<u>KC3225A48.0000C20E00</u>	<u>KC3225A33.3333C20E00</u>
<u>KC3225A16.0000C20E00</u>	<u>KC3225A27.0000C20E00</u>	<u>KC3225A25.0000C20E00</u>	<u>KC3225A20.0000C20E00</u>
<u>KC3225A125.000C2GE00</u>	<u>KC3225A31.2500C20EJB</u>	<u>KC3225A100.000C20E00</u>	<u>KC3225A125.000C20E00</u>