SURFACE MOUNT LED


▼SURFACE MOUNT LED


Ta=25℃

Lens Type	Shape	Type No.	Emitted Color	Package Color	Peak Wave Length forni	Lumi MIN.	nous intens (dict) TYP	ity IrimA)	Spatial Distribution (The Arpical distribution exemple fig. of each shape is shown below.)
Flat lens type		BR1111C	Red		660	7.0	11.7	20	O°
		AA1111C	Orange		605	2.0	3.4	20	30'
		AY1111C	Yellow		580	2.0	3.4	20	
		PY1111C	renow		570	7.0	11.7	20	1
		PG1111C	Green	Milky White	560	3.8	6.4	20	
		BG1111C	Pure Green		555	1.4	2.4	20	90°L 90°
		BRPY1211C	Red		660	7.0	11.7	20	0,
			Yellow		570	7.0	11.7	20	BR 30 20
		BRPG1211C	Red		660	7.0	11.7	20	
			Green		560	3.8	6.4	20	0.5
		BRBG1211C	Red		660	7.0	11.7	20	
			Pure Green		555	1.4	2.4	20	90,7


▼PACKAGE DIMENSIONS Unit: mm

Tolerance: ±0.1mm

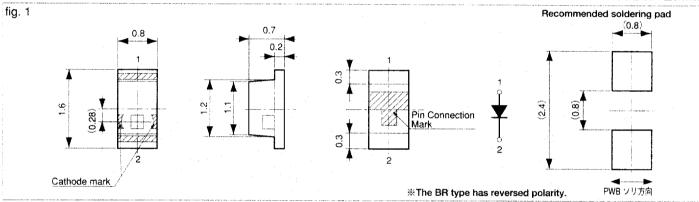


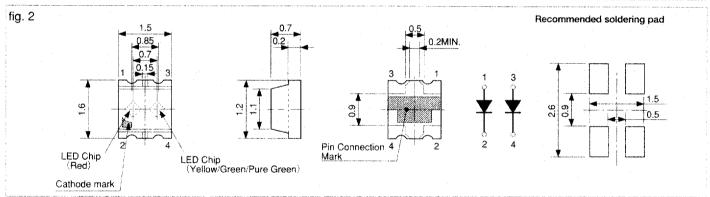

▼Taping specification

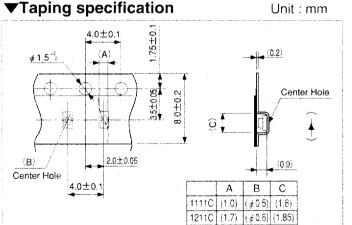

▼Reel specification



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Stanley Electric:

AA1111C-TR BRPG1211C-TR BG1111C-TR BRPY1211C-TR PY1111C-TR